

**Phased Environmental Impact
Assessment (EIA) Submission for
Development of the Lower Saint-Charles
Hydrocarbon Well: Well Pad Construction
and Vertical Stratigraphic Drilling**



Prepared for:

SWN Resources Canada Inc.
633 Main Street
Moncton, NB E1C 9X9

Prepared by:

Stantec Consulting Ltd.
845 Prospect Street
Fredericton, NB E3B 2T7

Project No. 121810275

April 11, 2014

[This page has been intentionally left blank.]

Lower Saint-Charles

EXECUTIVE SUMMARY

SWN Resources Canada, Inc. (SWN RC) proposes to further explore for hydrocarbon resources based on potential for such resources inferred from information gathered from exploration activities and available information.

SWN RC has retained Stantec Consulting Ltd. (Stantec), to prepare this submission for New Brunswick's Phased Environmental Impact Assessment (EIA) Process.

The exploration activity proposed herein is the drilling of a vertical stratigraphic well to further assess the potential for hydrocarbon-bearing formations underground and will include the construction of two access roads and well pad, on Crown Land near Lower Saint-Charles, New Brunswick (the Project). This document contains information solely pertaining to the Project. The completion of any future work at this location will be dependent on the results obtained from the Project findings and subject to additional review by the New Brunswick Department of Environment and Local Government (NBDELG). The scope of future work will be defined as a new project description and submitted as a sequel to this Phased EIA Submission.

A description of the existing environment is presented in Section 3.0 of this Phased EIA Submission and is based on available information, public, stakeholder and First Nations communications and field surveys conducted by Stantec during 2013. The valued environmental components (VECs) that may interact with the Project include:

- Atmospheric Environment;
- Aquatic Environment;
- Water Resources;
- Terrestrial Environment;
- Historical and Current Use by First Nations;
- Socio-economic Environment;
- Land Use;
- Visual Environment;
- Heritage Resources; and
- Transportation Network.

This Phased EIA Submission considers the potential interactions of the Project, as presented in Section 3.0, with the surrounding environment. There were no species at risk, or ecologically sensitive or protected areas that would provide critical or limiting habitat within the Project Development Area (PDA) that were identified during the desktop review or site visits conducted for the Project.

In consideration of operational siting and environmental planning considerations (Section 3.2); the implementation of planned, proven and effective mitigation (Section 3.4) as part of the Project to reduce potential environmental interactions; and the inclusive continued First Nation, public and stakeholder engagement opportunities (Sections 4.0 and 5.0, respectively), there are no substantive environmental interactions anticipated as a result of the Project.

SOMMAIRE

SWN Resources Canada, Inc. (« SWN RC ») propose d'explorer davantage les ressources en hydrocarbures en fonction des ressources potentielles déterminées à l'aide de l'information recueillie à partir des activités d'exploration et des renseignements disponibles.

SWN RC a retenu les services de Stantec Consulting Ltd. (Stantec) afin de préparer cette soumission pour le processus d'étude d'impact sur l'environnement (EIE) par étapes du Nouveau-Brunswick.

Les travaux d'exploration proposés dans le présent sommaire visent le forage d'un puits vertical stratigraphique afin de poursuivre l'examen du potentiel de formations souterraines pétrolifères et inclura la construction de deux voies d'accès et d'une plateforme sur les terres de la Couronne près de Bas Saint-Charles au Nouveau-Brunswick (le projet). Ce document contient uniquement de l'information concernant ce projet. La réalisation de travaux futurs à cet endroit dépendra des résultats obtenus à partir des conclusions du projet, sous réserve d'un examen additionnel effectué par le ministère de l'Environnement et des Gouvernements locaux du Nouveau-Brunswick. L'étendue de travaux futurs sera définie dans une nouvelle description de projet et sera présentée en tant que suite à la soumission de l'EIE par étapes.

Une description de l'environnement existant est fournie dans la section 3.0 de la soumission de l'EIE par étapes et a été préparée à partir des renseignements disponibles, des communications publiques, avec les intervenants et les Premières Nations, et des études sur le terrain réalisées en 2013 par Stantec. Les composantes valorisées de l'écosystème pouvant avoir une interaction avec le projet comprennent :

- le milieu atmosphérique;
- le milieu aquatique;
- les ressources hydriques;
- le milieu terrestre;
- l'utilisation courante et historique par les Premières Nations;
- l'environnement socioéconomique;
- l'utilisation du territoire;
- l'environnement visuel;
- les ressources patrimoniales; et,
- le réseau de transport.

Cette soumission de l'EIE par étapes tient compte des interactions possibles du projet, telles qu'elles sont présentées dans la section 3.0, avec le milieu environnant. L'examen documentaire ou les visites du site effectués dans le cadre du projet n'ont pas révélé la présence d'espèces en péril ou d'aires protégées ou écosensibles qui fourniraient un habitat limitant ou essentiel au sein de la zone d'aménagement du projet.

Compte tenu des considérations relatives au choix du site et à la planification environnementale (section 3.2); de la mise en œuvre de mesures d'atténuation planifiées, éprouvées et efficaces (section 3.4) dans le cadre du projet afin de réduire les interactions possibles avec l'environnement; et des possibilités de participation inclusive et continue des Premières Nations, du public et des intervenants (sections 4.0 et 5.0, respectivement), on ne prévoit pas d'interaction importante avec l'environnement découlant du projet.

TABLE OF CONTENTS

EXECUTIVE SUMMARY	E.1
1.0 INTRODUCTION	1
1.1 OVERVIEW OF THE PROJECT	1
1.2 PURPOSE/RATIONALE/NEED FOR THE PROJECT	2
1.2.1 History and Background	5
1.2.2 Exploration to Date in New Brunswick by SWN Resources Canada	6
1.3 PROPONENT INFORMATION	6
1.4 PROPERTY OWNERSHIP	9
1.5 FUNDING	9
1.6 PROJECT-RELATED DOCUMENTS	9
1.7 ORGANIZATION OF THIS DOCUMENT	9
2.0 PROJECT DESCRIPTION	10
2.1 PROJECT DEFINITION AND LOCATION	10
2.1.1 Site Selection Process	13
2.2 PROJECT COMPONENTS AND ACTIVITIES	13
2.2.1 Construction: Access Roads and Well Pad	14
2.2.2 Drilling	21
2.2.3 Stratigraphic Examination (Well Logging)	37
2.2.4 Decommissioning and Restoration	38
2.2.5 Materials and Waste Management	41
2.3 PROJECT SCHEDULE	45
2.4 ENVIRONMENTAL MANAGEMENT SYSTEM	45
3.0 ENVIRONMENTAL SETTING AND POTENTIAL INTERACTIONS BETWEEN THE PROJECT AND THE ENVIRONMENT	46
3.1 PHYSICAL SETTING	46
3.1.1 Surficial Geology	49
3.1.2 Bedrock Geology	49
3.2 OPERATIONAL SITING AND ENVIRONMENTAL PLANNING CONSIDERATIONS	50
3.2.1 Identification of Areas with Potential for Hydrocarbons	50
3.2.2 Environmental and Operational Planning	52
3.3 KNOWN APPROVALS, PERMITS OR AUTHORIZATIONS REQUIRED FOR THE PROJECT	54
3.4 POTENTIAL INTERACTIONS BETWEEN THE PROJECT AND THE ENVIRONMENT, AND PLANNED MITIGATION	56
3.4.1 Atmospheric Environment	56
3.4.2 Aquatic Environment	67
3.4.3 Water Resources	69
3.4.4 Terrestrial Environment	71
3.4.5 Historical and Current Use by First Nations	75
3.4.6 Socio-Economic Environment	76
3.4.7 Land Use	78
3.4.8 Visual Environment	80
3.4.9 Heritage Resources	85

3.4.10	Transportation Network.....	87
4.0	FIRST NATIONS ENGAGEMENT.....	89
5.0	PUBLIC AND STAKEHOLDER ENGAGEMENT	91
5.1	WRITTEN COMMUNICATION TO ELECTED OFFICIALS	91
5.2	WRITTEN COMMUNICATION TO POTENTIALLY AFFECTED LANDOWNERS	91
5.3	INFORMATION PACKAGES TO GROUPS AND ORGANIZATIONS	92
5.4	PHASED EIA SUBMISSION DOCUMENT AVAILABLE FOR PUBLIC VIEWING	92
5.5	ADDITIONAL ENGAGEMENT	93
5.5.1	Bilingual Website Module	93
5.6	PHASED EIA SUBMISSION INQUIRIES	93
6.0	CONCLUSION	95
7.0	CLOSURE	96
8.0	REFERENCES	97

LIST OF TABLES

Table 2.1	Blow-Out Preventer Components.....	34
Table 2.2	Estimated Total Number of Truck Loads.....	41
Table 3.1	Summary of Information Used for Environmental and Operational Constraint Analysis.....	53
Table 3.2	Regulatory Permits, Approvals, and Authorizations.....	55
Table 3.3	Nearest Noise Sensitive Receptors to the Project	58
Table 3.4	Air Contaminant Emissions from Construction Activities (3-4 Week Duration).....	59
Table 3.5	Air Contaminant Emissions from Drilling Activities (4-8 Week Duration)	60
Table 3.6	Emissions of GHGs from Construction (3-4 Week Duration)	61
Table 3.7	Emissions of GHGs from Drilling Activities (4-8 Week Duration)	61
Table 3.8	Typical Construction Equipment Sound Pressure Levels	62
Table 3.9	Predicted Daytime Sound Pressure Levels from Construction (3-4 Weeks Duration)	63
Table 3.10	Drilling Continuous Noise Sources.....	64
Table 3.11	Sound Pressure Levels from Drilling with Doors Closed (4-8 Week Duration)	65
Table 3.12	Summary of Noise Prediction Results at 900 m from the Well Pad (At Nearest Receptor)	66

LIST OF FIGURES

Figure 1.1	Site Location – Lower Saint-Charles	3
Figure 1.2	Southeastern New Brunswick Geology and Oil and Gas Lease/Licence Blocks.....	7
Figure 2.1	Project Development Area (PDA) – Lower Saint-Charles, Kent County, New Brunswick (Crown Land PID Nos. 25245531 and 00000003).....	11
Figure 2.2	Typical Well Pad Layout Within the PDA	19
Figure 2.3	Typical Drill Detail.....	23
Figure 2.4	Typical Well Cross Section and Casing Design.....	27
Figure 2.5	Blow-Out Preventer Equipment	35
Figure 2.6	Typical Casing Detail: Non-viable Well – Plug and Decommissioning.....	39
Figure 3.1	Environmental Constraint Analysis Results for Well Pad Placement - Lower Saint-Charles	47
Figure 3.2	Population by Sex and Age Group, Saint-Charles Parish, 2011	77
Figure 3.3	Viewshed for Visibility of Drill Rig When on Site – Lower Saint-Charles	83

LIST OF APPENDICES

Appendix A	Additional Information Requirements	
------------	-------------------------------------	--

[This page has been intentionally left blank.]

Lower Saint-Charles

LIST OF INITIALISMS AND UNITS

Initialisms/Unit	Definition
AANDC	Aboriginal Affairs and Northern Development Canada
AAS	(New Brunswick) Aboriginal Affairs Secretariat
AC CDC	Atlantic Canada Conservation Data Centre
AER	Alberta Energy Regulator (previously the Energy Resources Conservation Board of Alberta, ERCB)
API	American Petroleum Institute
asl	above sea level
BOP	blow-out preventer
CAODC	Canadian Association of Oilwell Drilling Contractors
CH ₄	methane
CO	carbon monoxide
CO ₂	carbon dioxide
CO _{2e}	carbon dioxide equivalent
dBA	decibels on the A-weighted scale (measure of noise)
DWA	deer wintering area
DFO	Fisheries and Oceans Canada
EIA	environmental impact assessment
ERCB	Energy Resources Conservation Board (Alberta)
FIT	formation integrity test
GHG	greenhouse gas
GWP	global warming potential
ha	hectare
IADC	International Association of Drilling Contractors
IK	indigenous knowledge
IPCC	Intergovernmental Panel on Climate Change
km	kilometre
kPa	kiloPascal
L _{dn}	equivalent sound pressure level averaged over a day and night period
L _{eq}	equivalent sound pressure level
LIDAR	light detection and ranging (for the purpose of digital elevation modeling)
LOS	level of service
m	metre
m ³	cubic metre

Initialisms/Unit	Definition
MSDS	Material Safety Data Sheets
N ₂ O	nitrous oxide
NAAQO	National Ambient Air Quality Objectives
NBDELG	New Brunswick Department of Environment and Local Government
NBDEM	New Brunswick Department of Energy and Mines
NBDNR	New Brunswick Department of Natural Resources
NBDNRE	New Brunswick Department of Natural Resources and Energy
NBDTI	New Brunswick Department of Transportation and Infrastructure
NBENV	New Brunswick Department of Environment
NORM	naturally-occurring radioactive materials
NO _x	nitrogen oxides
NTNB	Nature Trust of New Brunswick Inc./La Fondation pour la protection des sites naturels du Nouveau-Brunswick Inc.
PDA	Project Development Area
PID	Parcel Identifier
PNA	Protected Natural Area
PM	particulate matter
POL	petroleum, oils and lubricants
SAR	species at risk
SNB	Service New Brunswick
SO ₂	sulphur dioxide
SOCC	species of conservation concern – those listed under provincial or federal <i>Species at Risk Acts</i> , or ranked S3 "Sensitive" or rarer by the ACCDC
SWN RC	SWN Resources Canada, Inc.
Tcf	trillion cubic feet
THC	total hydrocarbon
tonne	metric tonne
TRC	Technical Review Committee
VEC	valued environmental component
WHO	World Health Organization

1.0 INTRODUCTION

New Brunswick legislation and regulation require that certain projects or work must be evaluated through an environmental impact assessment (EIA) process (see Schedule A to the New Brunswick *Environmental Impact Assessment Regulation–Clean Environment Act*, Regulation 87-83). In addition, the Province of New Brunswick has created a Phased EIA process and though the process is not yet governed by any specific legislation or regulation, certain projects such as oil and gas exploration drilling work are evaluated through a Phased EIA Submission to the New Brunswick Department of Environment and Local Government (NBDELG). The Phased EIA process is characterized as an opportunity for greater environmental stewardship by allowing regulators and the public to conduct early stage evaluation of various project developments.

This document is submitted to NBDELG as part of the Phased EIA Process for the construction of an access road and well pad and the drilling of a single vertical stratigraphic well (the "Project") near Lower Saint-Charles, Kent County, New Brunswick (the "Project Site" or the "Site") by SWN Resources Canada, Inc. ("SWN RC", or the "Proponent"). The Phased EIA process closely mirrors the EIA registration process and this submission reflects that. For greater certainty, this Project does not trigger an EIA registration, but rather this document is a submission pursuant to the Phased EIA process.

This document contains information solely pertaining to the Project. The completion of any future work at the Site is dependent on the results obtained from the Project findings. If a decision to carry out further work is made, the scope of that work will be defined as a new project description and submitted in addition to this Phased EIA Submission. An EIA registration requires governmental approval before the work that is described therein may be carried out.

1.1 OVERVIEW OF THE PROJECT

The Project Site is situated on two Crown land properties near Lower Saint-Charles, Kent County, New Brunswick. The Parcel Identifiers (PIDs) are 25245531 and 00000003. PID 25245531 is part of a Crown Lease currently held under the Fundy Crown Timber Licence, which is being managed by Irving Pulp and Paper, Limited. The well pad lies 2.4 km east of the rural area of Lower Saint-Charles, 2.4 km south of the rural area of Grande-Aldouane, and 1.5 km west of the municipal boundary for the Town of Richibucto (Figure 1.1)

The Project will consist of the construction of a 2 hectare (ha) well pad to house the well two access roads (three access road options are provided: 120 m, 1,300 m, and 2,000 m in length) connecting the well pad to existing road infrastructure, drainage infrastructure, and the drilling of a single vertical stratigraphic well to an approximate depth of 1,000–4,000 m. This construction and drilling will allow for an examination of the stratigraphy that will aid in assessing the potential for hydrocarbon resources. For this well pad, two access roads are required to allow for safety/emergency response and transport of supplies to the Site to support Construction and Drilling. The two access roads will be selected of the three options provided, in consultation with the New Brunswick Department of Transportation and Infrastructure (NBDTI), and approval of the three options provided herein is sought for the purpose of the EIA submission and to facilitate discussion with NBDTI on the selection of the two access roads from the three options provided.

The specific activities that will be conducted as part of the Project are described in Section 2 of this document and include the following:


- access road and well pad construction, including surveying, clearing, grubbing, and leveling of two access roads and well pad;
- preparation and construction of the sub-base and base for the two access roads and well pad using local aggregates and fill materials, compaction, and ditching (as applicable);
- vertical stratigraphic drilling (with no hydraulic fracturing or other hydrocarbon-production activities) of a well, and casing installation;
- examination of stratigraphy and well logs;
- decommissioning of the well and restoration of the Site (if the well is determined to be unsuitable for future development), or the preparation of the well to allow for further testing exploration in subsequent projects, as the case may be;
- Project-related transportation;
- road repair and maintenance;
- water and material sourcing; and
- management of emissions and wastes associated with the above-noted activities.

As discussed in Section 2.2.3.1, if the well is determined to have insufficient potential for hydrocarbon development and a decision is made not to proceed with additional testing or drilling at this Site, the well will be permanently plugged and decommissioned, and restoration of the Site will occur. Conversely, if SWN RC identifies the potential for hydrocarbon resources as a result of the Project and seeks to explore this further, then the well will be temporarily rendered inactive and secured pending procedures for such subsequent Phased EIA Submissions or EIA registrations for such further work.

1.2 PURPOSE/RATIONALE/NEED FOR THE PROJECT

SWN RC proposes to further explore for hydrocarbon resources at this location based on potential for such resources inferred from information gathered from exploration activities and available information. The exploration activity proposed herein is the drilling of a vertical stratigraphic well to further assess the potential for hydrocarbon-bearing formations underground.

The history of oil and gas development and potential in New Brunswick and background information on geological formations and exploration activities undertaken to date by SWN RC are provided for context in Section 1.2.1.

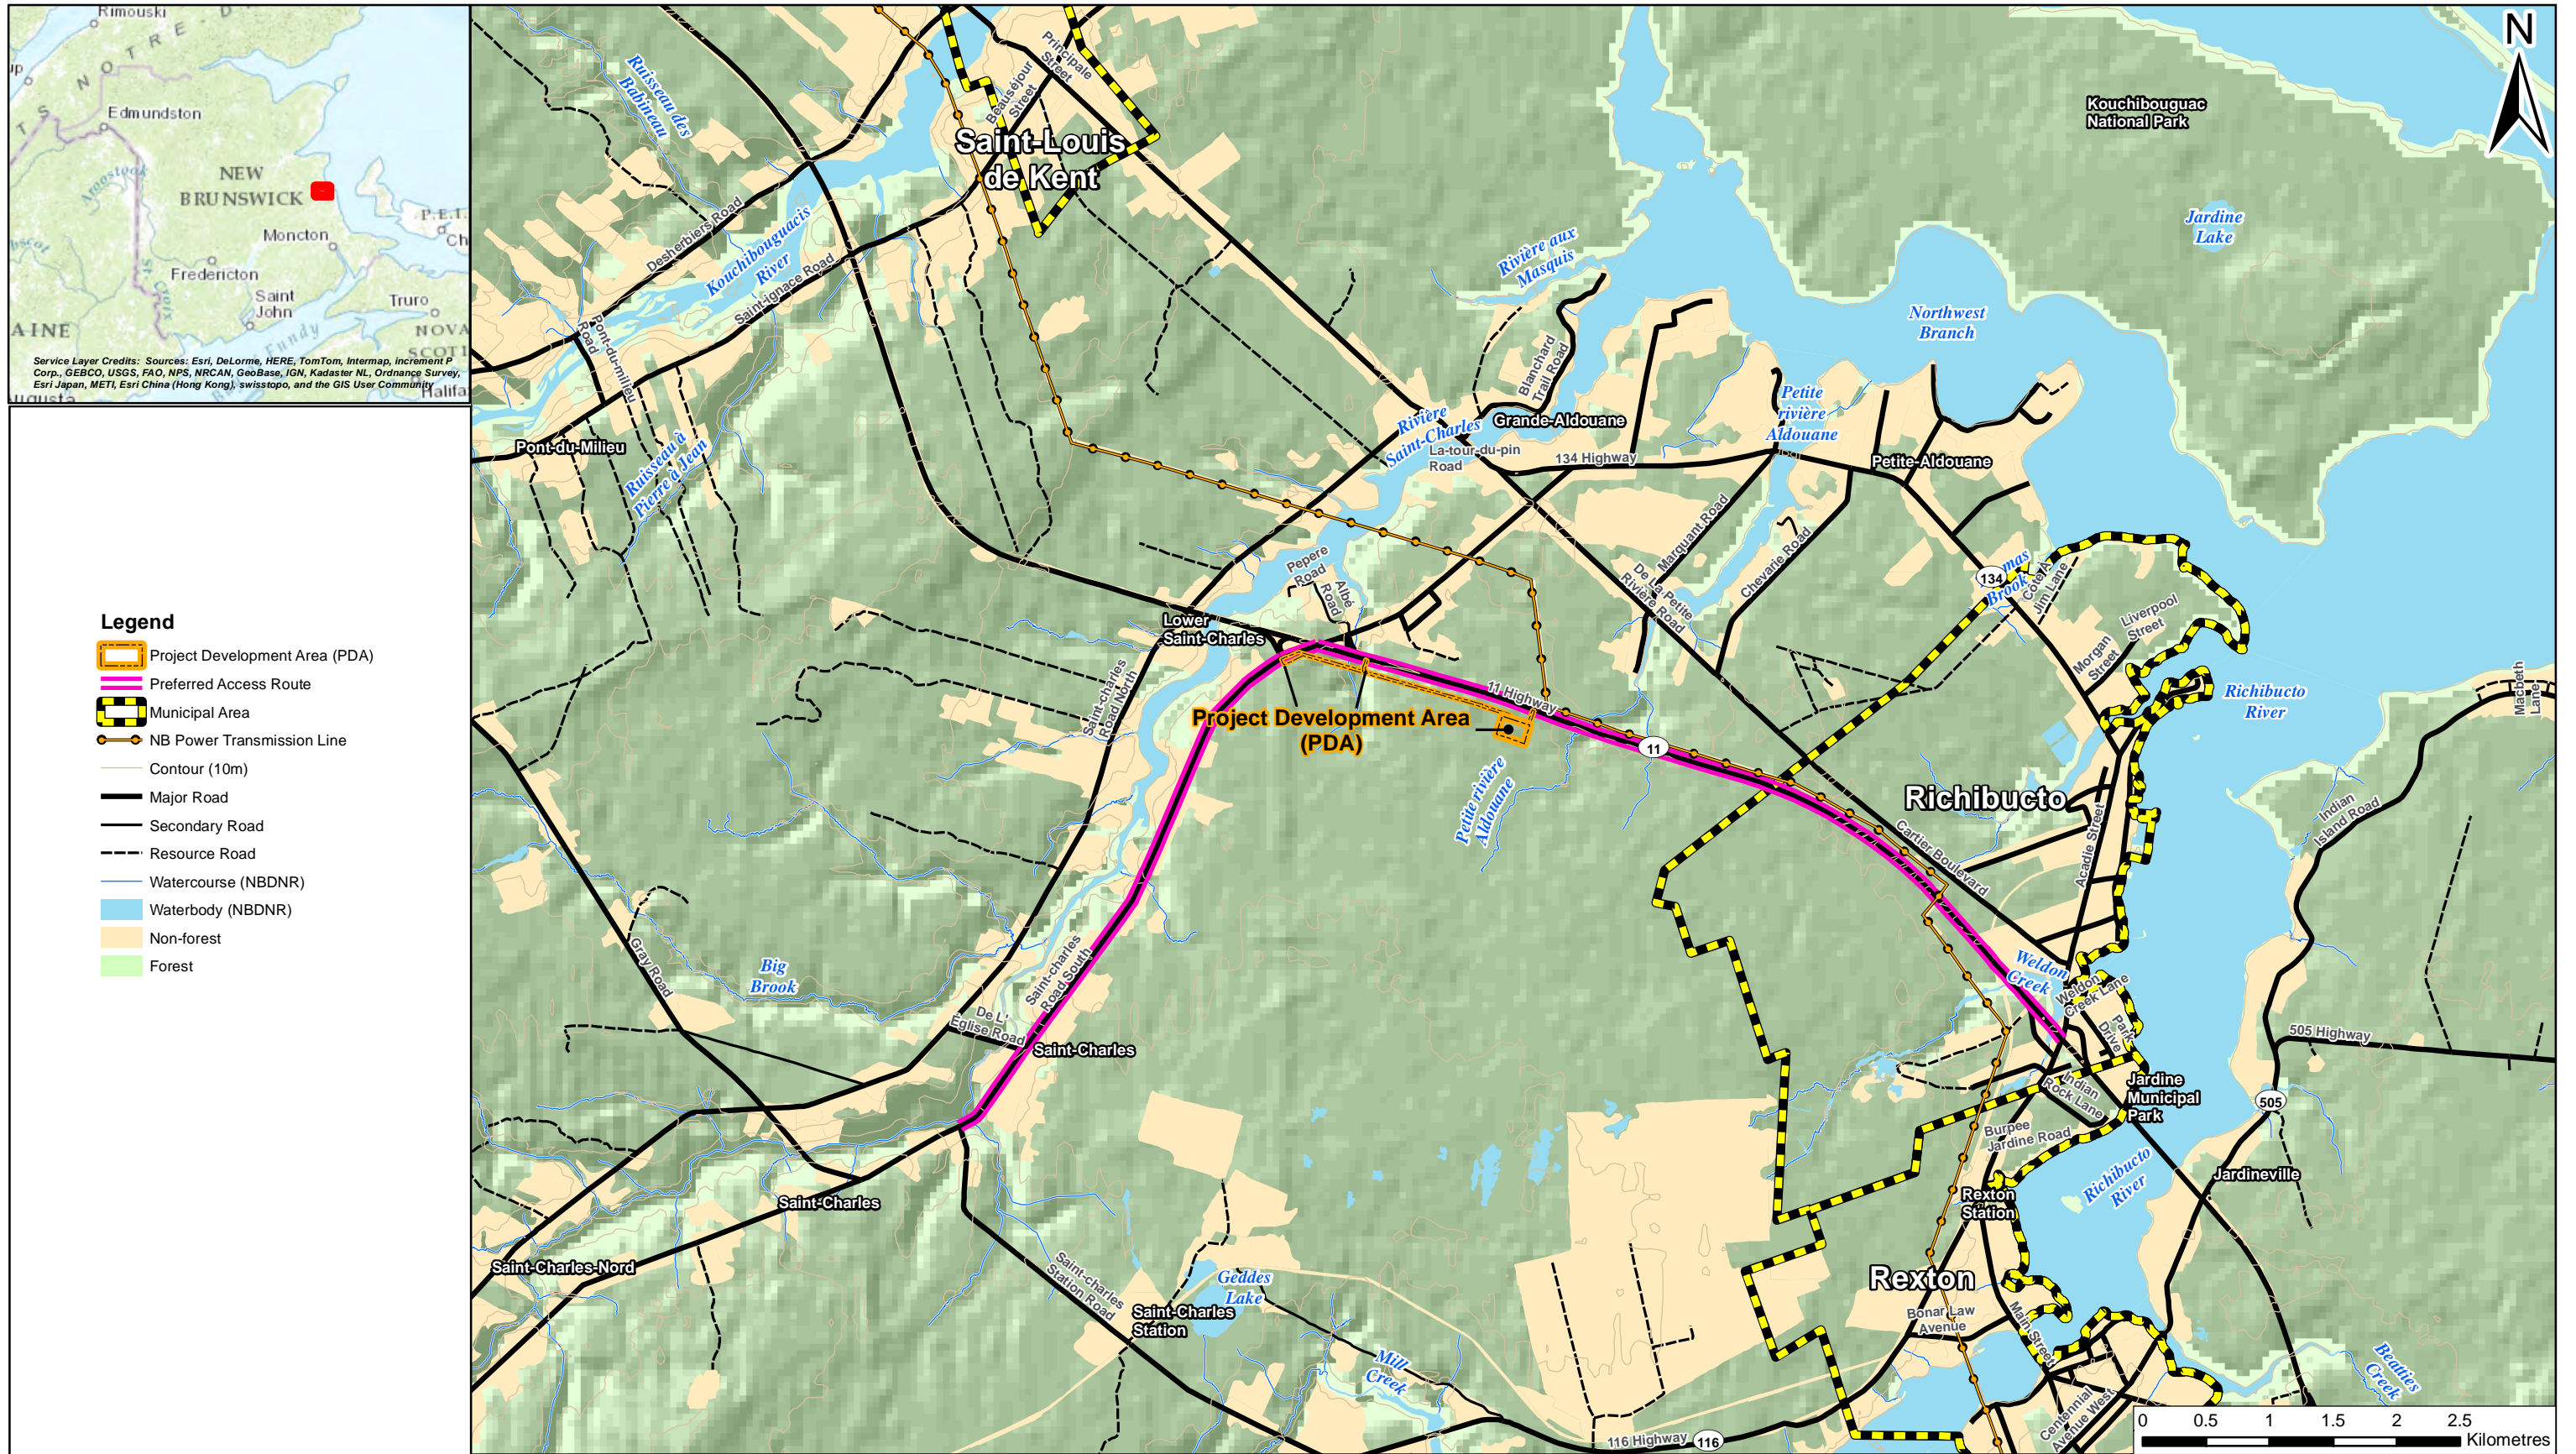

Legend

- Project Development Area (PDA)
- Preferred Access Route
- Municipal Area
- NB Power Transmission Line
- Contour (10m)
- Major Road
- Secondary Road
- Resource Road
- Watercourse (NBDNR)
- Waterbody (NBDNR)
- Non-forest
- Forest

Projection:	New Brunswick Double Stereographic
Scale:	1:50,000
Date:	06 Apr 2014
Fig. By:	JAB
Appd. By:	MM

Client:	
Project:	

Site Location - Lower Saint-Charles

Fig. No.:	1.1	

NBDNR: Forest Inventory Database Layers (2009)
 SNB: Provincial Layers (2005), Municipalities Layer (Oct 2011),
 NBDELG: Regulated Wetland Layer (March 2011)

Lower Saint-Charles

1.2.1 History and Background

There is a long history of oil and gas development in New Brunswick, dating back to 1859 when exploration first began within Mississippian-aged sediments of the Moncton Sub-basin. In 1909 commercial production of oil and natural gas began at the Stoney Creek oil field located near Hillsborough, and such production continues today (St. Peter 2000). Other hydrocarbon resources in the form of natural gas were later discovered and developed in 2000 near Penobsquis, in an area now known as the McCully gas field (NBDELG 2012a). An overview of the geological setting, including the location of existing oil and gas operations and infrastructure is presented in Figure 1.2.

New Brunswick lies along the western portion of the Maritimes Basin, which was formed approximately 340–360 million years ago during the late Devonian and Mississippian periods. The Maritimes Basin is considered to have potential for hydrocarbon resources (Dietrich *et al.* 2009) and it extends from south-central New Brunswick to Prince Edward Island and the northern portion of Nova Scotia. Within the Maritimes Basin, the Lower (deeper) Carboniferous sub-basins extend along a northeast axis between an area south of Fredericton towards Moncton, and they have a high potential to contain petroleum resources. In these sub-basins, sandstone and shale rock formations within the deeper Horton Group and confined by the shallower Mabou and Pictou Groups have been found to provide a geological setting that is prospective for hydrocarbons. A number of areas within this formation have been explored and have been proven to contain hydrocarbons.

With the emergence of new technologies (e.g., high-precision, multi-directional drilling techniques; multi-well pads; and hydraulic fracturing), there has been renewed interest in determining whether there are additional economically-viable hydrocarbon reserves in deep sedimentary layers within the Maritimes Basin of New Brunswick. The drilling of a single, stratigraphic well (as is described herein) does not require the use of these new technologies. The use of stratigraphic drilling to assess resource potential is a common practice in New Brunswick and, indeed, worldwide and has been conducted many times in this region to assess the potential for hydrocarbons and other commercial resource minerals.

Undeveloped natural gas reserves in New Brunswick have been estimated at 1.9 trillion cubic metres (67.3 trillion cubic feet (Tcf)) (Eaton 2010), equivalent to approximately nineteen times the size of the Sable Island conventional gas field that has been developed since 2000. Though these potential New Brunswick reserves (or their commercial development) are not yet proven, current indicators suggest that these reserves could represent a substantive contribution to energy demand. The commercial development of such resources, should it be determined to be viable, could provide employment opportunities for residents of the province, leasing opportunities for landowners, supply chain business opportunities, royalties and taxes for government, and it has the potential to positively affect the New Brunswick economy for present and future generations. Oil and gas exploration is the process for determining whether these potential reserves exist. Information gained through exploration will further the understanding of New Brunswick's geological history and its potential hydrocarbon resources.

1.2.2 Exploration to Date in New Brunswick by SWN Resources Canada

In 2010, the Province of New Brunswick, pursuant to the New Brunswick *Licence to Search and Lease Regulation—Oil and Natural Gas Act*, Regulation 2001-66), issued Licences to Search to SWN RC for the exploration of hydrocarbon resources over an area of approximately 1.1 million ha of New Brunswick, as shown in Figure 1.2. The purpose of the Licences to Search is to characterize potential hydrocarbon resources within the area so that SWN RC can assess the feasibility of extracting such resources for commercial purposes and to determine if they will seek to convert selected areas to a lease by application under the *Licence to Search and Lease Regulation*.

Throughout 2010 and 2011, and also in 2013, SWN RC conducted geophysical (seismic, gravity and magnetic) surveys, surface geochemical surveys and aerial photography, and they prepared digital elevation maps. Through these processes, the area near the Project Site was identified as potentially prospective for hydrocarbons, thus requiring further evaluation by drilling a stratigraphic well.


The specific purpose of the Project, (*i.e.*, drilling a stratigraphic well) is to assess the potential for subsurface formations at the Project Site to hold recoverable hydrocarbon resources. Vertical stratigraphic drilling will also be used to calibrate the interpretation of non-intrusive geophysical survey data collected to date to more accurately estimate areas with higher potential for hydrocarbon presence within SWN RC's Licences to Search area.

As part of its Licences to Search, SWN RC has committed to investing \$47 million in New Brunswick towards geophysical, geochemical, and drilling exploration of its Licences to Search area. The Project described herein represents an investment of \$4–6 million. A portion of this investment will flow into local economies through wages, services, equipment rentals, and purchases. Distribution to local economies will also occur via the workers employed while undertaking the activities for access road and well pad construction and drilling, as well as the purchase of equipment and consumables. This distribution of money will contribute to economic development in the local area and the province.

1.3 PROPONENT INFORMATION

The Proponent contact information is as follows:

Name of Proponent:	SWN Resources Canada, Inc.
Mailing Address of Proponent:	P.O. Box 35 Moncton, NB E1C 8R9
Contact Person for this Phased EIA Submission:	Chad Peters, Manager, New Brunswick Exploration
Telephone Number:	Toll Free 1-877-SWN-NB23 (1-877-796-6223)
Fax Number:	(506) 382-9497
Electronic Mail Address:	swnnb@swn.com
Website:	www.swnnb.ca

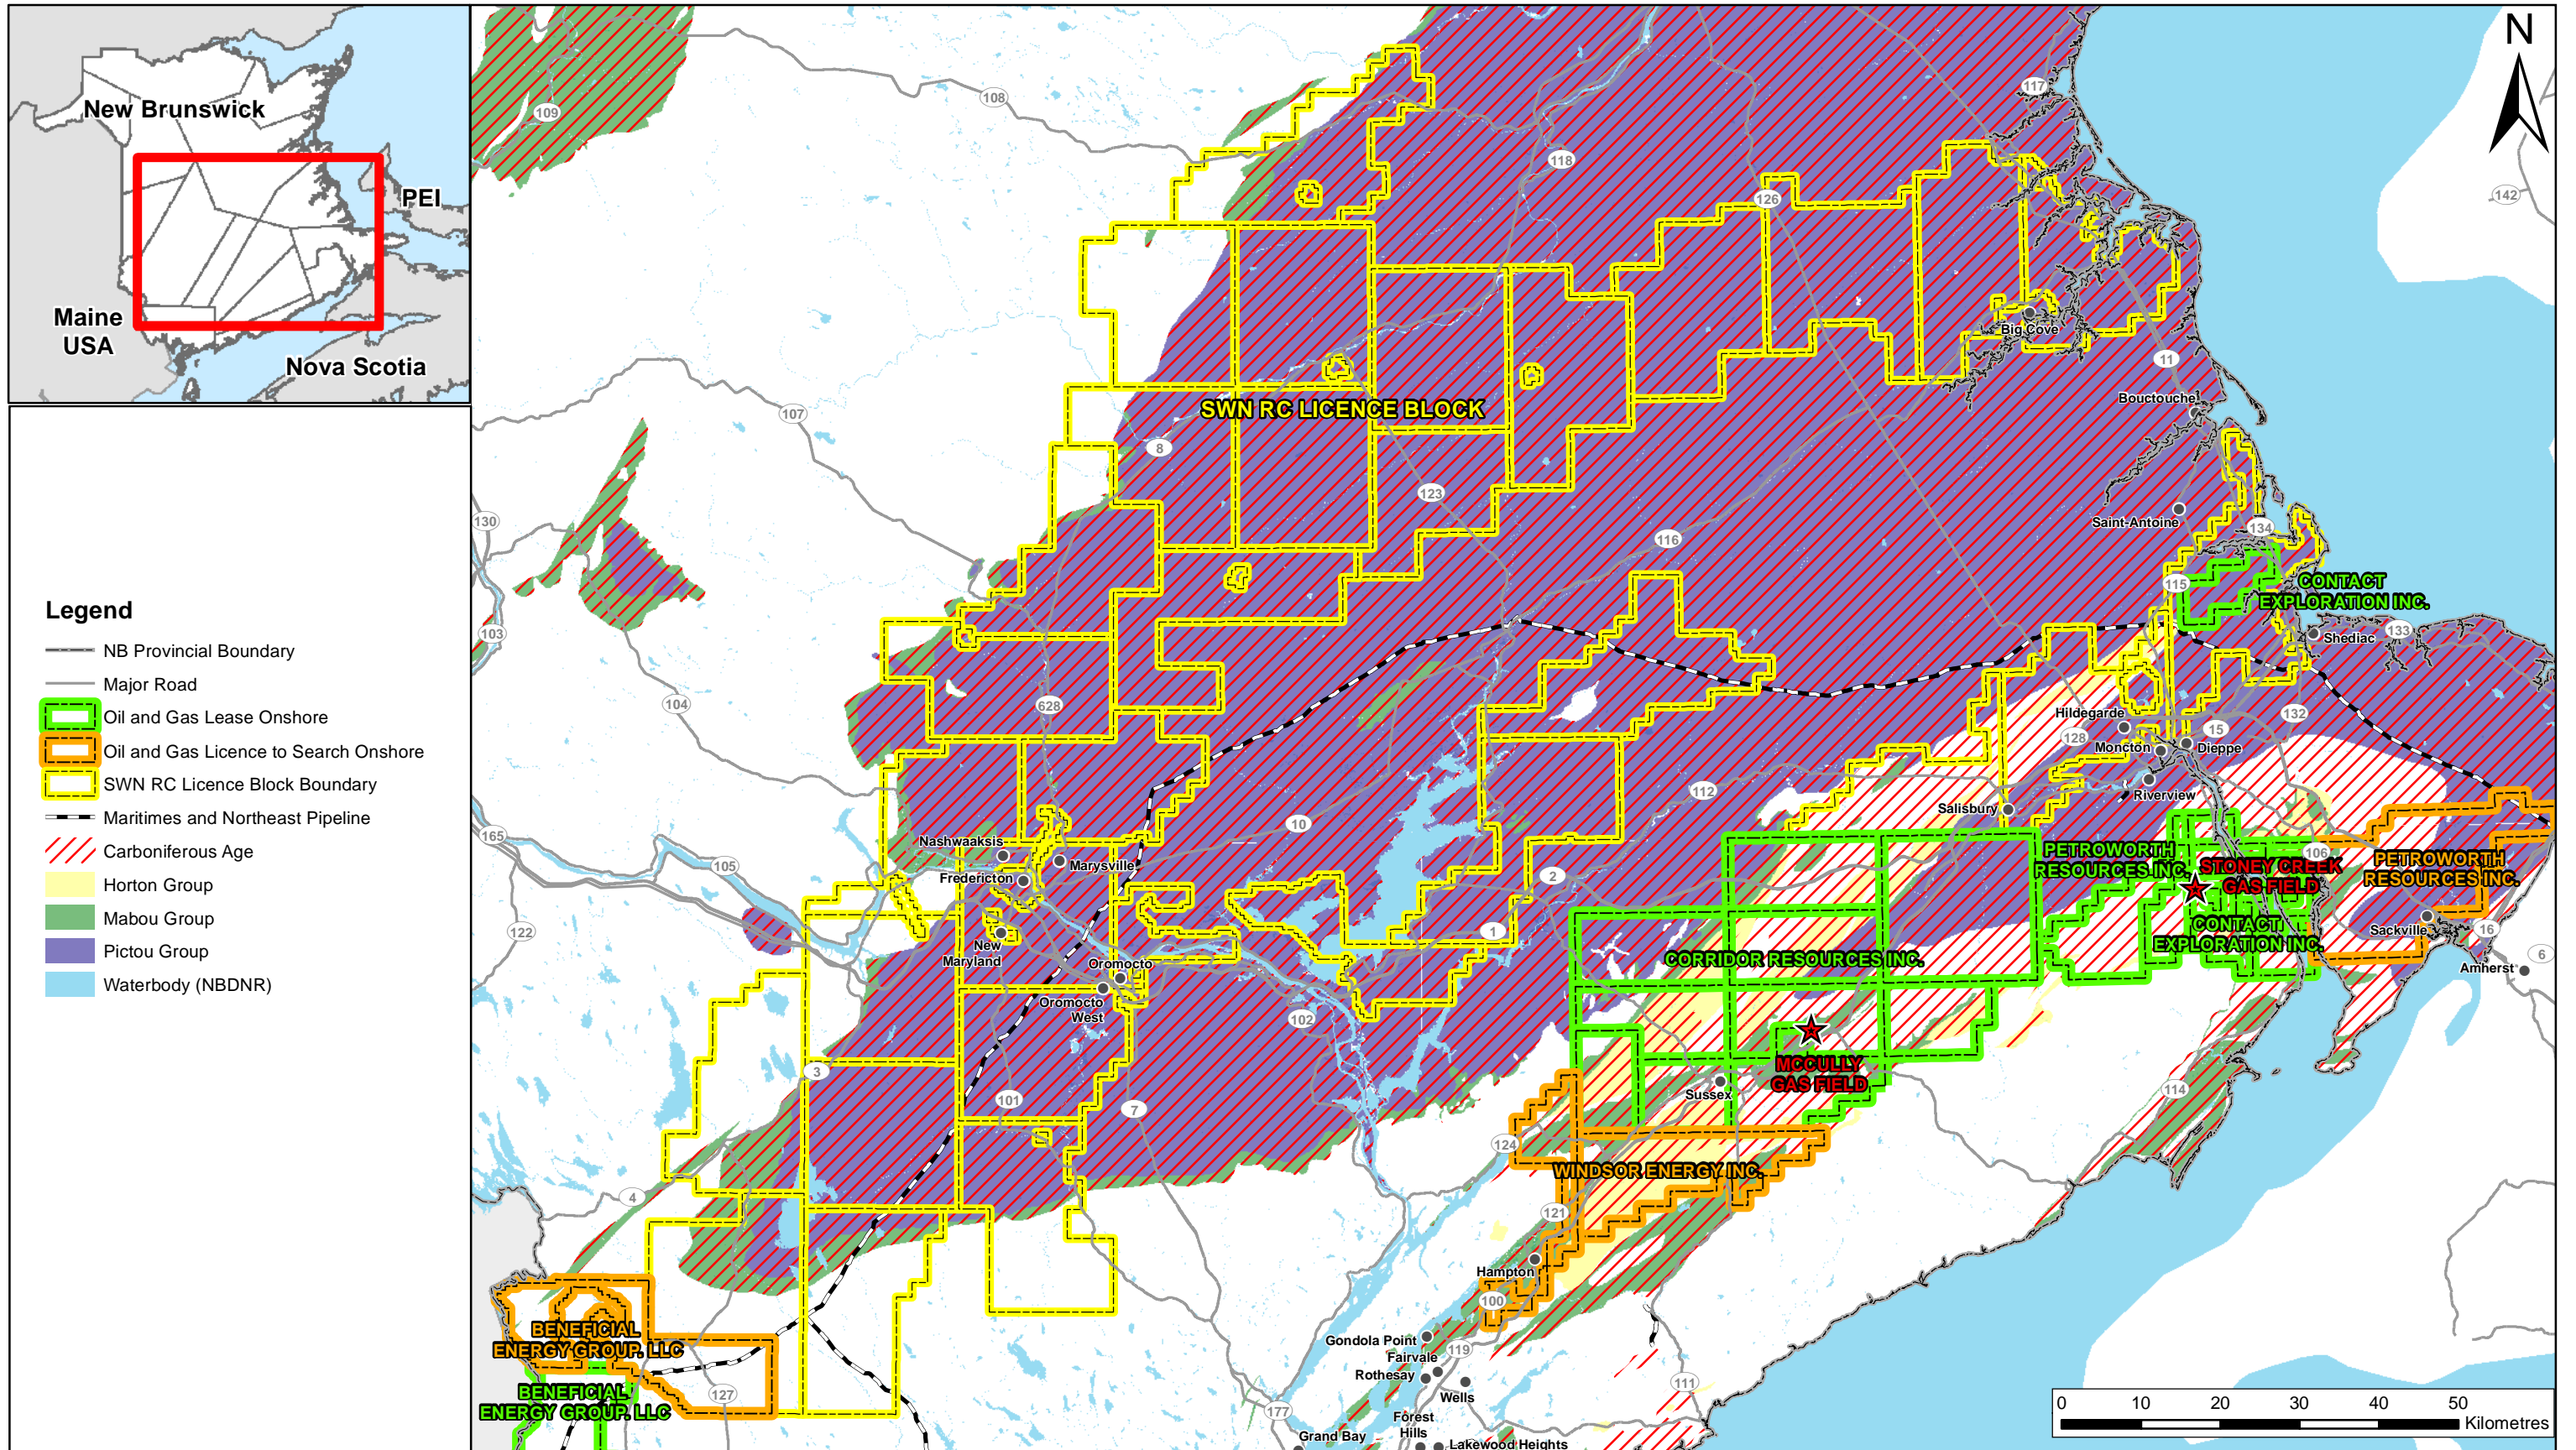

- Legend**
- NB Provincial Boundary
 - Major Road
 - Oil and Gas Lease Onshore
 - Oil and Gas Licence to Search Onshore
 - SWN RC Licence Block Boundary
 - Maritimes and Northeast Pipeline
 - Carboniferous Age
 - Horton Group
 - Mabou Group
 - Pictou Group
 - Waterbody (NBDNR)

Recommended Citation: Rampton, V.N. 1984. Generalized surficial geology map of New Brunswick Department of Natural Resources and Energy, Minerals, Policy and Planning Division, NR-8 (scale 1:500,000).

Projection:	New Brunswick Double Stereographic
Scale:	1:800,000
Date:	06 Apr 2014
Fig. By:	JAB
Appd. By:	MM

Client:	SWN Resources Canada
Project:	121810275

Southeastern New Brunswick Geology and Oil and Gas Lease / Licence Blocks

Fig. No.:
1.2



Lower Saint-Charles

1.4 PROPERTY OWNERSHIP

The Project Site is situated entirely on Crown land on PID No. 25245531 and 0000003 near Lower Saint-Charles in Kent County, New Brunswick.

1.5 FUNDING

The Project will be financed entirely by SWN RC.

1.6 PROJECT-RELATED DOCUMENTS

Other Project-related documents developed in support of this document, including an Environmental Protection Plan and an Emergency Response Plan, will be submitted to NBDELG under separate cover.

1.7 ORGANIZATION OF THIS DOCUMENT

This Phased EIA Submission contains the following eight Sections.

- Background information and an overview of the Project are provided in Section 1.
- A detailed description of the Project and construction and drilling activities associated with the Project are provided in Section 2.
- A discussion of environmental setting and potential Project-environment interactions, along with key mitigation to reduce adverse environmental interactions, is provided in Section 3.
- Information on First Nations engagement activities that have been conducted or are planned as part of the Project is provided in Section 4.
- Information on public engagement activities that have been conducted or are planned as part of the Project is provided in Section 5.
- Conclusion and summary of the assessment are provided in Section 6.
- Closing remarks and a statement of limitations in respect of this document are provided in Section 7.
- The references consulted in the preparation of this document are provided in Section 8.

2.0 PROJECT DESCRIPTION

This Section provides a general overview of the Project, its location, related elements and activities to be undertaken. It also provides a description of the mitigation measures that will be put in place to reduce potential adverse environmental interactions during the Project.


2.1 PROJECT DEFINITION AND LOCATION

The Project consists of the construction of a 2 ha well pad to allow for the drilling of a stratigraphic well, to an approximate depth of 1,000–4,000 m, to assess the potential for hydrocarbon resources through an examination of the vertical stratigraphy at the well location. Three access road options have been provided for the Project, which are approximately 120 m, 1,300 m, and 2,000 m in length. Two of these access road options will be selected in consultation with the New Brunswick Department of Transportation and Infrastructure (NBDTI). The selected roads will be constructed within 20-m wide right-of-ways to provide equipment and personnel access from Route 11 and/or Saint-Charles Road South to the well pad.

The Project Development Area (PDA) is defined as the maximum extent of the physical area of disturbance of the Project and is shown on Figure 2.1. The PDA will include a well pad, two well pad access roads, drainage infrastructure, and all related areas where ground-breaking, clearing, or other construction activities will occur. Of the total area of the PDA (6.3 to 8.3 ha, depending on the selected road options), the well pad will be situated within a 3.5 ha area, the access roads will be situated on 2.8 to 4.8 ha, and the remainder may be undeveloped or used for other purposes such as drainage infrastructure, borrow material, and bull pens.

The well pad portion of the PDA is situated on Crown land approximately 2.4 km south of the rural area of Grande-Aldouane, 2.4 km east of the rural area of Lower Saint-Charles, and 1.5 km west of the Town of Richibucto municipal boundary, Kent County, New Brunswick. The parcel identifier for the well pad portion of the PDA, as referred to by Service New Brunswick, is PID No. 25245531, and the access road options begin on this PID and are primarily located on PID 00000003, which is under NBDTI management. The approximate centre of the PDA area for the well pad is at coordinates 46°41'21.867"N and 64°55'31.174"W.

Since the PDA is located outside of an incorporated municipality, local governance is by the Regional Service Commission – District 6, Richibucto. The Crown Lease for the Site is currently held under the Fundy Crown Timber Licence, which is being managed by Irving Pulp and Paper, Limited. Access to the PDA will be via Route 11 and potentially also the Saint-Charles Road South, depending on the access road options selected (Figure 1.1).

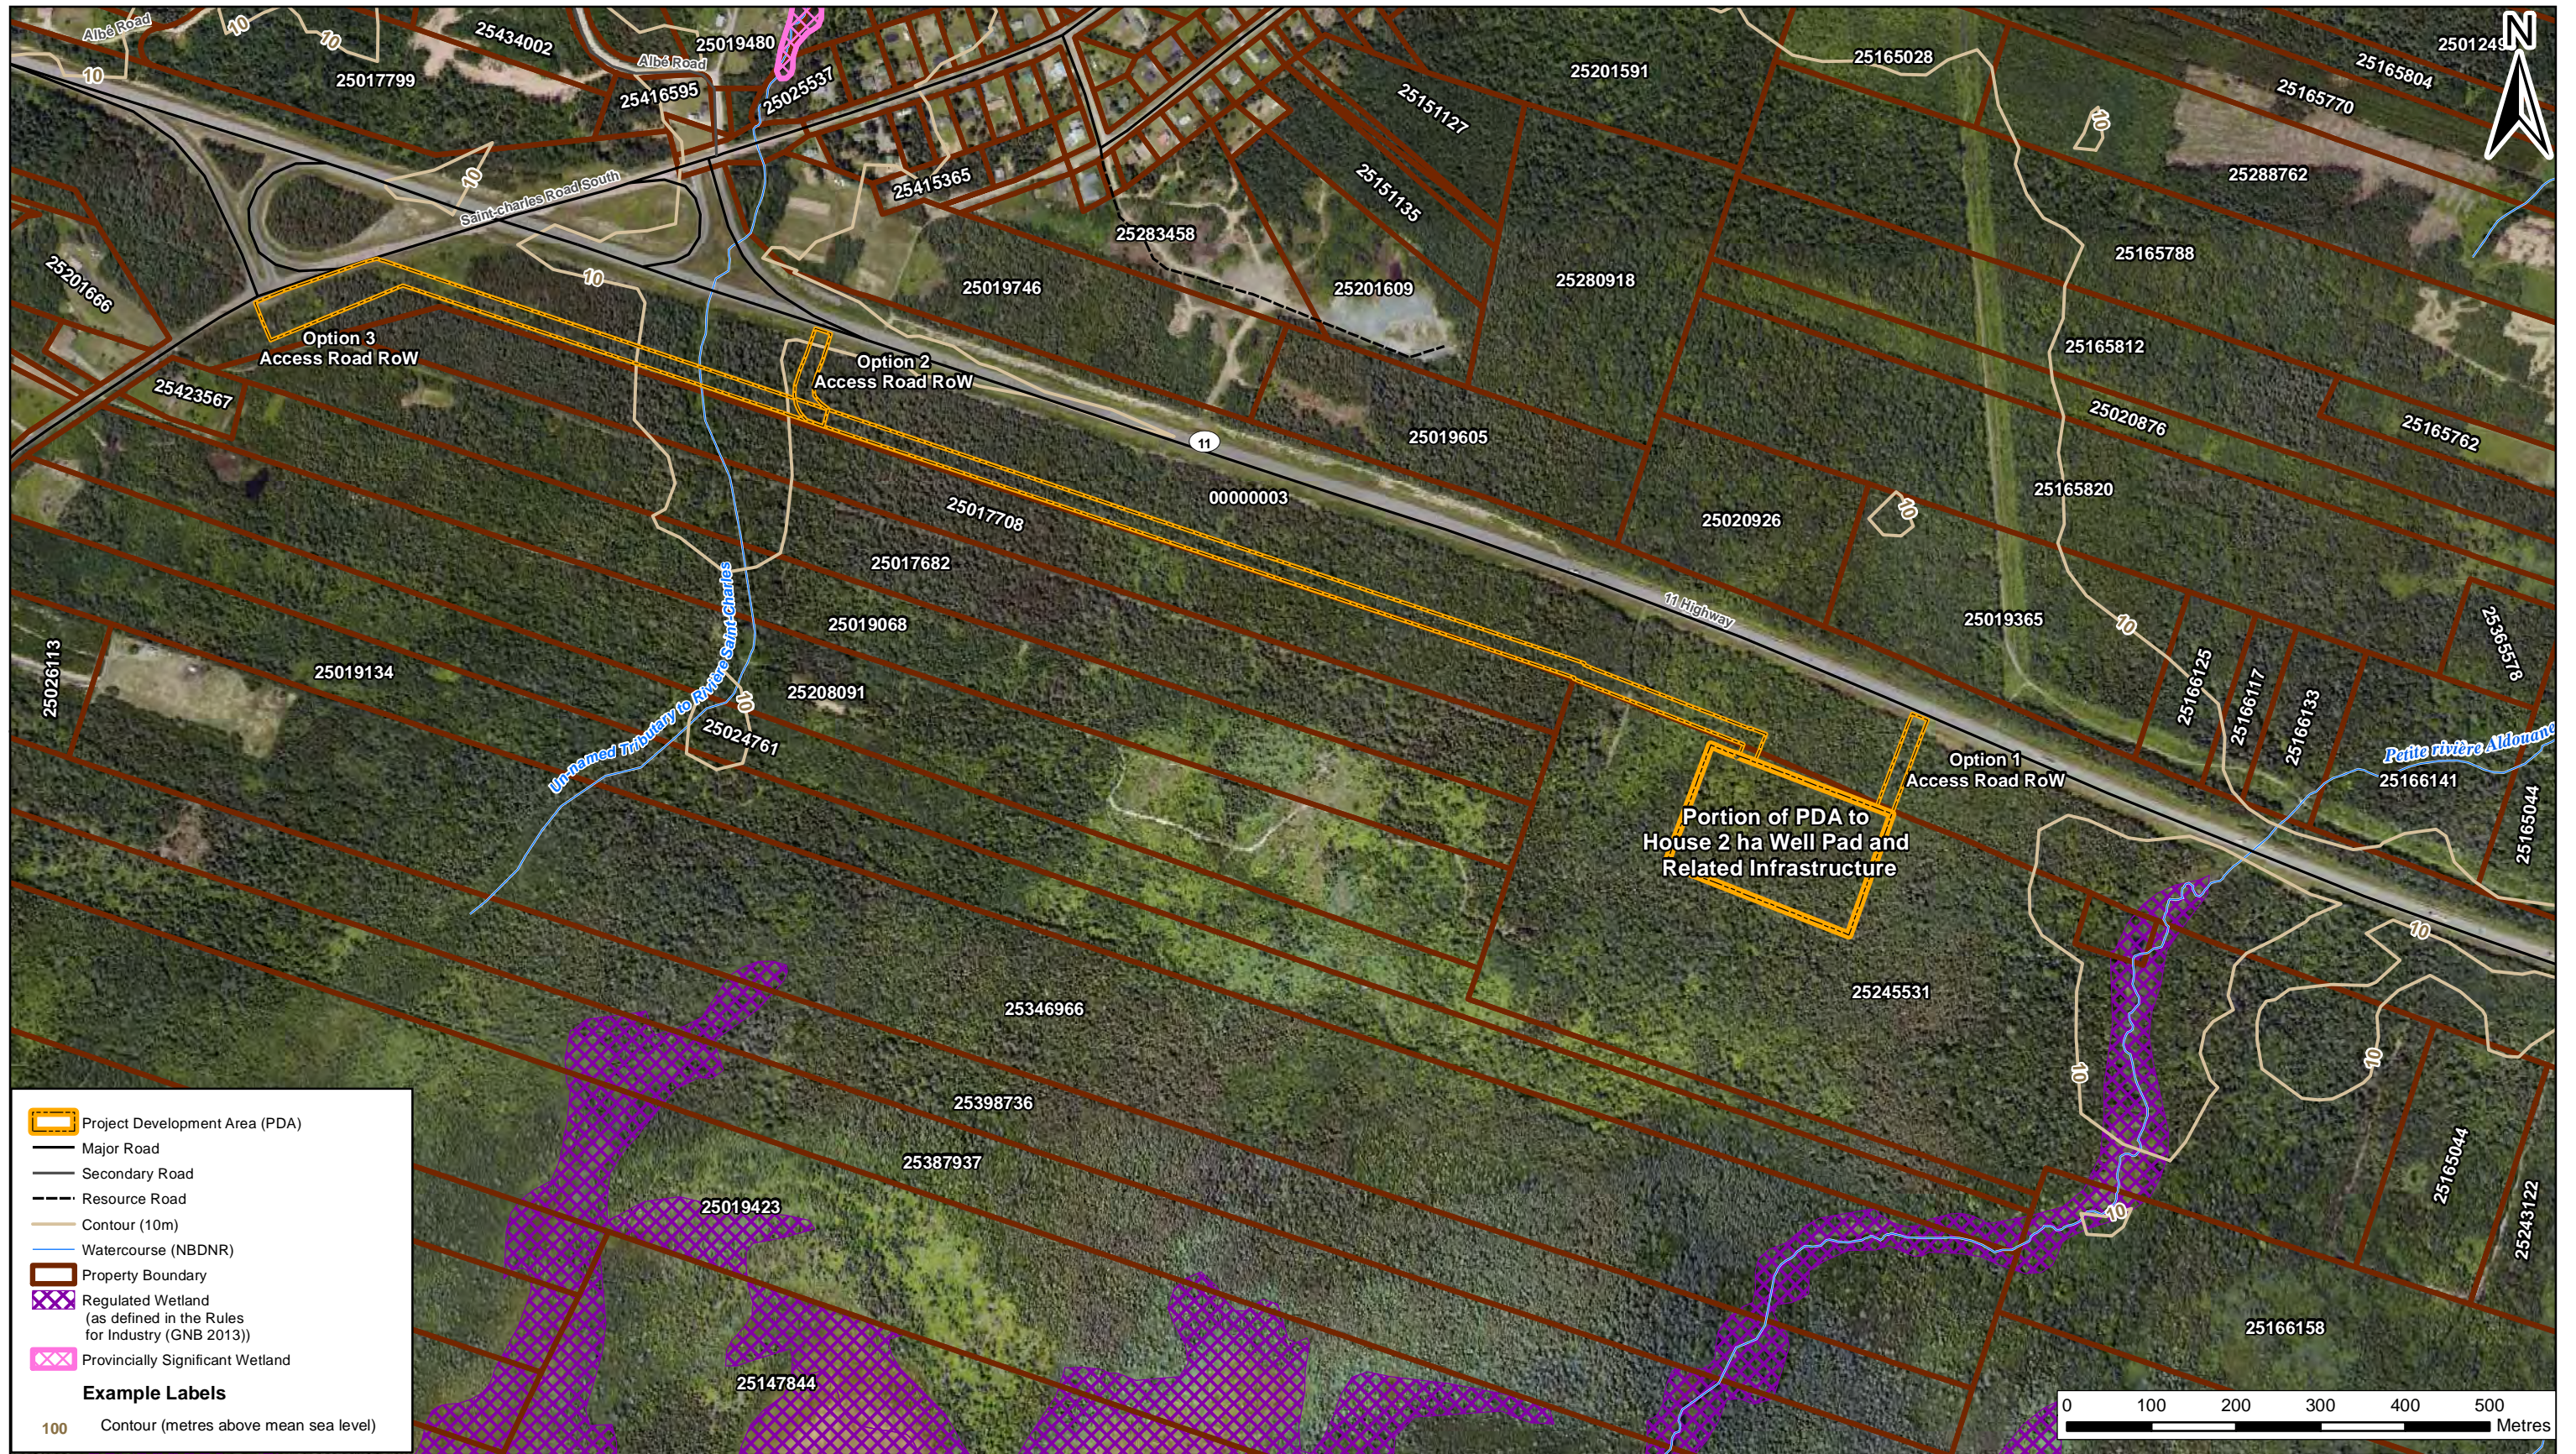

Legend

- Project Development Area (PDA)
- Major Road
- Secondary Road
- Resource Road
- Contour (10m)
- Watercourse (NBDNR)
- Property Boundary
- Regulated Wetland (as defined in the Rules for Industry (GNB 2013))
- Provincially Significant Wetland

Example Labels

100 Contour (metres above mean sea level)

Sources: Base Data: NBDNR, SNB, NBENV;
 ESA, Species Observations, Managed Areas: ACCDC
 Aerial Imagery: Spatial Energy 2011
 Regulated Wetland layer provided by NBDELG, obtained from GeoNB in March 2012.

Projection: New Brunswick Double Stereographic
 Scale: 1:7,500
 Date: 06 Apr 2014
 Fig. By: JAB
 Appd. By: MM

Client: **SWN**
 Resources Canada

Project: 121810275

**Project Development Area (PDA) -
 Lower Saint-Charles, Kent County, New Brunswick
 (Crown Land PID Nos. 25245531 and 00000003)**

Fig. No.:
 2.1



Lower Saint-Charles

2.1.1 Site Selection Process

SWN RC uses a systematic site selection process to identify sites to drill a stratigraphic well to assess the geology for potential hydrocarbon resources. The process begins with a thorough review of existing geological and environmental information over the Licences to Search areas. The PDA was selected considering the following, among other factors:

- geology and geophysical survey results (existing information and information gathered by SWN RC surveys conducted in 2010, 2011, and 2013);
- environmental constraints; and
- operational constraints and feasibility.

The process by which the PDA was selected is discussed further in Section 3.2.

2.2 PROJECT COMPONENTS AND ACTIVITIES

This Section describes the components and activities required for, and associated with, the Project.

Project components include:

- well pad access roads;
- well pad;
- associated infrastructure (e.g., storm water collection ponds, fluid storage tanks, fuel tanks, bull pens, borrow pits, fencing, access road maintenance and repairs as necessary);
- vertical stratigraphic well drilling and associated equipment; and
- once drilled, the stratigraphic well itself and its associated components (e.g., casing, grouting).

The construction of these and other Project components will be carried out during the Project as follows:

- construction (for both the access roads and well pad, including surveying, clearing, grubbing, levelling, site preparation, sub-base and base construction, ditching and drainage management, and related activities) (collectively referred to as a phase known as "Construction"); and
- drilling (including all activities associated with the drilling of the stratigraphic well and associated mitigation measures, casing, cementing, drilling fluid management, and waste management) (collectively referred to as a phase known as "Drilling"):
 - stratigraphic examination (including review of well logs and testing and monitoring of the well to examine the stratigraphy of the well); and

- preparation for subsequent exploration or testing (if the well stratigraphy is determined to be viable and worthy of pursuing ongoing development), or decommissioning and site restoration (if the well is determined to be non-viable for hydrocarbon resources and not worthy of further development).

The Environmental Protection Plan (provided under separate cover) provides additional details on how the above activities will be completed in terms of environmental protection measures and procedures that must be implemented for the Project as planned by SWN RC. Drilling of the stratigraphic well and associated activities will be conducted in accordance with "Responsible Environmental Management of Oil and Natural Gas Activities in New Brunswick; Rules for Industry, February 15, 2013" (hereinafter referred to as the "Rules for Industry"; GNB 2013).

Further details on these Project components and the activities that will be conducted to complete well pad development and Drilling are provided below.

2.2.1 Construction: Access Roads and Well Pad

The PDA was chosen, in part, because of its proximity to an existing road network that is suitable for transportation of construction and drilling equipment and related activities; therefore no new roads will be required other than the two access roads to the well pad. The well pad portion of the PDA lies on PID 25245531 whereas the access roads begin on this PID and are primarily located on PID 00000003, which is under NBDTI management.

Three access road options are being proposed; Option 1 running 120 m north to Route 11, Option 2 running approximately 1,300 m west then north to Route 11, and Option 3 running approximately 2,000 m in length to west to Saint-Charles Road South (Figure 2.1). Two of these access road options will be selected for the Project in consultation with NBDTI. The two selected access roads will be constructed within the 20-m wide right-of-ways, as shown in Figure 2.1, to link the existing adjacent roads (Route 11 or Saint-Charles Road South) to the well pad location. The final configuration of these access roads will be subject to discussion and agreement with NBDTI.

The activities associated with the construction of the access roads and well pad are consistent with the following work progression and activities:

- site preparation;
- sub-base and base construction;
- run-off management;
- well pad layout;
- construction of ancillary facilities; and
- installation of fluid storage tanks and construction of secondary containment.

2.2.1.1 Site Preparation

Site preparation includes:

- surveying;
- clearing;
- grubbing; and
- bull pen construction and use for disposal and/or temporary storage of natural materials (e.g., top soil, overburden, removed vegetation) cleared from within the PDA.

2.2.1.1.1 Surveying

Surveying occurs prior to clearing and includes the cutting and marking of a centreline and cross-section offsets wide enough to provide unobstructed sight lines. The well pad will be located more than 150 m away from Petite Rivière Aldouane. The location of the well pad and well head will be in accordance with existing legislation and Section 9.8 of the Rules for Industry (GNB 2013).

At the time of surveying, a pre-construction site assessment will be conducted to document existing (pre-development) soil type(s) and distribution, vegetation type(s) and distribution, drainage and topography at the PDA to guide future restoration activities in accordance with Section 9.12 and Appendix 17 of the Rules for Industry (GNB 2013). Section 2.2.4 provides additional information on the decommissioning and restoration of the PDA. Ditches may be established at this time to drain water away from the well pad area.

2.2.1.1.2 Clearing and Grubbing

Clearing and grubbing will be limited to within the PDA. Clearing and grubbing boundaries will be delineated by visual flagging of the limits of the PDA during surveying. The width of the access roads will be based on the requirements for the anticipated equipment to be used for the drilling of the well and associated traffic. The clearing and subsequent handling of merchantable timber will be managed in consultation with NBDNR and the Crown Timber Licensee for the area.

Grubbing for construction of the access roads and the well pad involves the removal of surficial organic material and unsuitable materials, debris, and soil above the sub-soil layer. Bulldozers will remove the organic material from the underlying sub-soil and stockpile it for future restoration of the PDA; this will include topsoil, which will be managed in accordance with the *Topsoil Preservation Act*. Other grubbed material will be stockpiled and/or disposed of in the bull pen within the PDA.

Clearing and grubbing activities will be avoided to the extent necessary during the peak bird breeding period of May 1 to August 31 to avoid direct harm to protected bird species known to nest and breed in New Brunswick. Protected bird species include those protected under the federal *Migratory Birds Convention Act* and/or *Species at Risk Act (SARA)*, and under the New Brunswick *Species at Risk Act (NB SARA)*. Other mitigation steps may be taken as needed during clearing and grubbing to reduce the risk of nest destruction or disturbance to breeding birds. A bird biologist will be engaged prior to the start of

clearing and grubbing activities to verify conditions and identify additional mitigation if needed. The potential presence of protected bird species is discussed further in Section 3.4.4.

2.2.1.1.3 Bull Pen Construction and Use

Bull pens will be used within the PDA for the disposal and/or temporary storage of natural materials cleared from the PDA (e.g., non-merchantable trees, stumps, and grubbing debris). Bull pens will be located at least 30 m from watercourses and regulated wetlands as defined in the Rules for Industry (GNB 2013) unless under the authority of a Watercourse and Wetland Alteration (WAWA) permit issued under the *New Brunswick Watercourse and Wetland Alteration Regulation—Clean Water Act, Regulation 90-80* (the “WAWA Regulation”).

2.2.1.2 Sub-base and Base Preparation and Construction

Following grubbing, the sub-base for the well pad and access roads will be prepared by leveling the terrain through excavation or placement of soil materials. The sub-base is the stable material upon which the access road and well pad will be built to provide the required strength and stability to support Site activities and equipment. If the exposed natural soils are of a suitable material to be used as the sub-base, these soils will be compacted until firm and stable. Soils that cannot withstand heavy loads will be excavated and replaced with a material that can withstand heavy loads. Compaction will be accomplished using rollers, soil compactors, or both.

Once the sub-base has been prepared, a granular base will be applied in selected areas and graded to provide structural integrity, supply drainage, and improve weather resistance. Materials used to construct the sub-base and base will consist of suitable materials from within the well pad location (if available), or otherwise obtained from already developed local quarry areas or gravel pits.

2.2.1.3 Run-Off Management

SWN RC will develop a site-specific run-off management plan to manage run-off generated by rainfall and snow melt at the Site in a manner that aims to avoid soil erosion and the transport of contaminants off the well pad. This plan will be developed prior to ground disturbance. This plan will consider well pad design, as well as standard mitigation tools that may be used including but not limited to the following:

- erosion-control fencing;
- check dams;
- surface water catchment ponds;
- diversion ditches;
- mulching;
- impermeable liners; and
- containment berms.

Surface water will be managed throughout the PDA to minimize erosion and the potential release of petroleum, oils and lubricants (POL) or other contaminants to the surrounding environment. Any areas that will be used for storage and handling of drilling fluids or wastes will be equipped with an impermeable synthetic liner and contained on the perimeter by berms. Any storm water or other fluid that accumulates within the containment berms will be collected and trucked to a disposal facility, or tested and treated as necessary on-site prior to release to the environment. The remainder of the well pad area will have perimeter ditching which aims to avoid off-site surface run-off from draining onto the well pad, and to direct run-off from un-lined areas of the well pad to drain away from equipment work areas and towards storm water collection ponds. Storm water collection ponds will be designed to allow suspended sediments to settle out of the water column prior to release from the Site.

Ditches, containment berms and storm water collection ponds will be sized to accommodate anticipated heavy precipitation events.

The access road location from Saint-Charles Road South will cross an unnamed tributary to Rivière Saint-Charles, therefore watercourse-crossing structures will be required as part of this access road option, if selected. A standard culvert crossing is anticipated, the design of which would be subject to approval under the *WAWA Regulation*.

2.2.1.4 Well Pad Layout and Ancillary Facilities

The purpose of the well pad is to provide a level and stable area that drilling activities can take place upon, isolated from the surrounding environment. The central component of the well pad is the drilling rig, which is supported by various types of equipment and ancillary facilities. A typical well pad layout is shown in Figure 2.2. A site-specific and detailed plan of the well pad, including access road locations, will be developed and submitted prior to commencement of the Project. Equipment required to support Drilling can be generally categorized and described as follows.

- **General Operational Resources (Auxiliary Equipment):** Key components that are required to support Drilling include power generators (power package), fuel storage tanks, power source for blow-out preventer (BOP) equipment, hydraulic equipment, and water storage tanks.
- **Drill Fluid System Components:** Throughout Drilling, drilling fluid is circulated and monitored to facilitate drilling in consideration of any changes in sub-soil and rocks types that may be encountered below surface. A number of mixing/processing units, storage tanks, and pumps are used to manage this process.
- **Drilling Fluid Cleaning and Waste Management Components:** Various pieces of equipment are used to separate drill cuttings from drilling fluid, as well as to store or treat waste by-products that are generated. Generally, a series of shakers and centrifuges are used to separate drilling fluid from cuttings, as well as storage tanks and dehydrators, to further manage the drilling fluid and drill cuttings.
- **Staff Facilities:** Facilities to accommodate the staff working at the Site include buildings/mobile trailers brought on-site to be used as offices, living quarters, washrooms, lunchrooms, and changing areas. Potable water storage tanks will be used to supply freshwater to these buildings. Wastewater

from staff facilities will be managed using storage tanks and disposal at approved septage handling facilities.

- Equipment and Material Storage: The well pad is also used for storage of casing, pipe, cement and other drilling equipment that is not in current use.

2.2.1.5 Fluid Storage Tanks and Secondary Containment











The main fluids that will be used as part of the Project and stored on-site are water, diesel fuel, and drilling mu (discussed in Section 2.2.2.2). Although not considered a fluid, drill cuttings will be produced and will have varying moisture content; therefore, they will be treated as a fluid until they are sufficiently dried. Fluid storage tanks (other than water) on the well pad will be equipped with secondary containment with sufficient capacity to contain 110% of the largest single tank or of all the connected tanks (whichever is greater). Containment will be constructed in accordance with specifications outlined in Appendix 8, of the Rules for Industry (GNB 2013). In addition to Appendix 8, diesel fuel or other petroleum storage tanks will also comply with the *Petroleum Product Storage and Handling Regulation—Clean Environment Act, Regulation 87-97*.

The approximate volume of each of the fluids to be stored in tanks on the well pad is provided below:

- freshwater: approximately 100 m³;
- potable water: approximately 20 m³;
- diesel fuel: approximately 38,000 L;
- drilling fluid: 80–160 m³;
- displaced drilling fluid during cementing: 200 m³;
- mix fluids for cementing: 50–100 m³; and
- drill cuttings: approximately 100 m³.

The configuration of the tanks will be determined in discussion with the drilling contractor, once the contractor has been selected. The freshwater tank will be made of steel or plastic, and all other tanks will be made of steel. All tankage will be above-ground and inspected by a Professional Engineer prior to use, and a signed and stamped copy of the inspection report will be kept at the Site. To avoid a release, plugs or valves located on fluid storage tanks will be locked when not in use to avoid accidental or intentional releases as a result of vandalism or other causes.


LEGEND

-  LIVING QUARTERS AND OFFICE BUILDINGS
-  DRILLING FLUID CLEANING AND HANDLING COMPONENTS
-  MAIN DRILLING UNIT
-  DRILLING FLUID SYSTEM COMPONENTS (PUMPS, PROCESSING, MIXING AND STORAGE)
-  AUXILIARY EQUIPMENT (e.g., GENERATOR, FUEL TANK, WATER TANK, BOP POWER SOURCE, HYDRAULICS)
-  PARKING AND EQUIPMENT AND MATERIAL STORAGE
-  PARKING
-  PDA
-  INDICATES FLOW OF DRILLING WASTE
-  INDICATES FLOW OF DRILLING FLUID

GREY SHADING INDICATES FLUID HANDLING / STORAGE AREA: PORTIONS OF AREA WILL BE EQUIPPED WITH SYNTHETIC LINERS AND CONTAINMENT. ANY STORM WATER THAT ACCUMULATES WITHIN CONTAINMENT BERMS WILL BE COLLECTED AND MANAGED ACCORDINGLY (DRAINAGE FEATURES NOT SHOWN)

BLUE SHADING INDICATES AREAS IN THE WELL PAD WHERE SURFACE RUN-OFF WILL BE DIRECTED TO STORM WATER COLLECTION PONDS (NOT SHOWN).

EXAMPLE RoW LOCATION FOR ACCESS ROAD

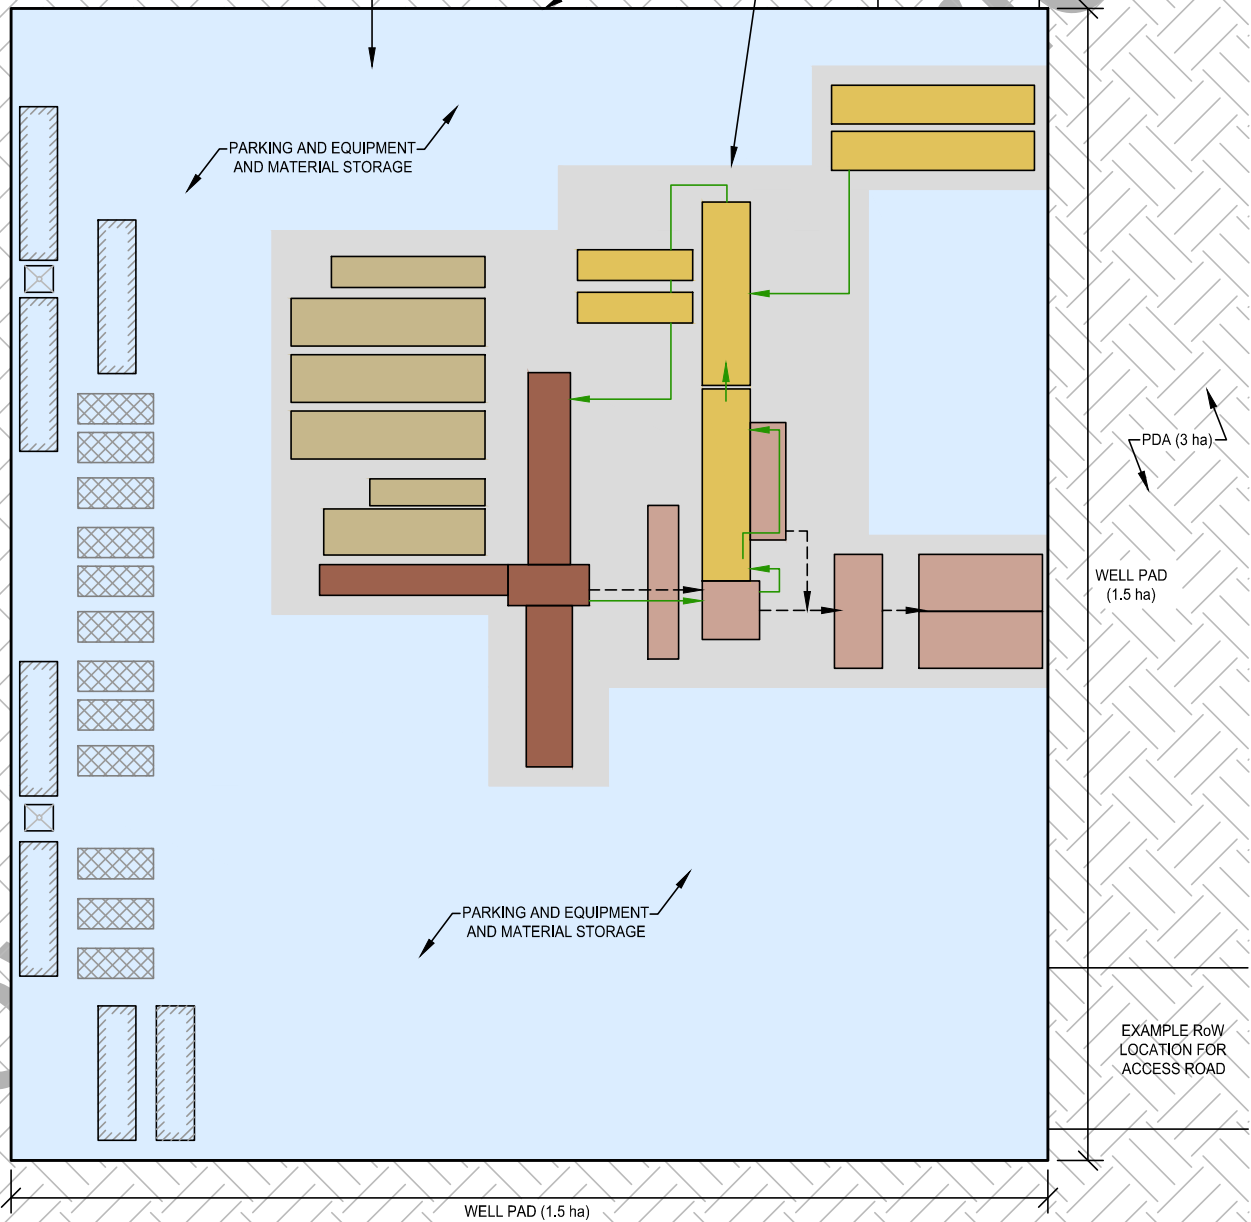

THIS DRAWING ILLUSTRATES SUPPORTING INFORMATION SPECIFIC TO A STANTEC CONSULTING LTD. REPORT AND MUST NOT BE USED FOR OTHER PURPOSES.

**TYPICAL WELL PAD LAYOUT
WITHIN THE PDA**

Job No.: 121810275
 Scale: NOT TO SCALE
 Date: 10-APR-2014
 Dwn. By: JL
 App'd By: CB

Fig. No.: **2.2**



Client: SWN RESOURCES CANADA, INC.

V:\121810275 - SWN\AUTOCAD\WELL PAD_REV10.dwg

[This page has been intentionally left blank.]

Lower Saint-Charles

2.2.2 Drilling

A single stratigraphic well will be drilled to an approximate depth of 1,000–4,000 m. The following Sections describe the drilling process and the various components required to support it.

2.2.2.1 Drilling Rig and Drill String Components

A drilling unit and its ancillary equipment, collectively referred to as a “drilling rig” or simply “rig”, will be used to bore a well into the ground to the desired final depth. The drilling rig will be selected in consideration of the capacity of the rig to achieve the maximum desired target depth of the well, and the availability of rigs within the planned drilling timeline. The specific drilling rig or drilling contractor have not yet been selected for the Project; therefore the equipment and processes described below are to be considered typical for Drilling to be completed. The conductor hole, or uppermost section of a drilled well (anticipated to be approximately 20 m deep), will likely be drilled by a smaller drilling rig prior to moving in the rig that will be used to drill the wellbore.

The drilling of the wellbore into the ground is accomplished by rotating a weighted metal drill string with a drill bit attached to its end into the ground (Figure 2.3). The wellbore is completed as a result of the weight of the lower components of the drill string providing downward pressure on the drill bit. Taken together, these various components are called the “drill string” and consist, from the bottom up, of:

- The drill bit: made with very hard metal or diamond surfaces, capable of breaking apart the rock formation into which it is being drilled.
- Drill collars (usually with stabilizers): thick-walled tubes of metal positioned near the bottom of the drill string to provide weight for the drilling; drill stabilizers are generally installed near the bottom of the drill string to provide stability and maintain a straight, vertical hole.
- drill pipe: lightest and smallest diameter metal tubing used to connect the lower components of the drill string to the surface equipment.

The nature of the anticipated rock formations to be drilled and purpose of the wellbore are used to determine which combination of drill bit, collars, and stabilizers will provide the optimum combination of penetration rate and operating duration. All components of the drill string are hollow to facilitate the circulation of drilling fluid through the drill string to the drill bit.

2.2.2.2 Drilling Fluid and Drilling Fluid Management

Drilling fluid, also referred to as “drilling mud” or simply “mud”, serves a wide variety of functions and is a fundamental component of the drilling process. Drilling fluid is used to:

- lubricate, clean, and cool the drill bit;
- carry the drilled rock cuttings to the surface;
- provide a jetting action at the drill bit to enhance rock breakage;
- act as a sealant on the wellbore formation walls;

- provide hydrostatic pressure to control influx of formation fluids; and

maintain the integrity of the wellbore. In its simplest form, drilling fluid consists of freshwater and bentonite (clay). Other materials are added to enhance specific properties or characteristics as described in more detail in Section 2.2.2.2.1. The drilling fluid is fed into a large pump from storage tanks and pumped through a flexible high-pressure hose into the top of the hollow drill string. The drilling fluid pumps provide the pressure to force the drilling fluid through the inside of the drill string and down the wellbore, emerging into the wellbore through ports or “jets” in the drill bit. Pumping the drilling fluid through the drill bit creates a jetting action, which assists in breaking the formation rock. The remaining pressure is adequate to overcome the small amount of friction and circulate the fluid and drill cuttings back up the wellbore to the surface in the space between the drill string and wellbore formation wall, known as the “annulus”, as shown in Figure 2.3.

As the drilling fluid returns to the surface, the fluid and bedrock cuttings mixture is captured and carried to the drilling fluid cleaning equipment and drilling fluid storage tanks. Following the cleaning, the drilling fluid is then recirculated into the drilling process.

There are two types of drilling fluid (mud) commonly used in exploration drilling:

- water-based mud (WBM); and
- oil-based mud (OBM).

Hole tortuosity (*i.e.*, the aggregated effect of multiple curves throughout the wellbore, which can result in increased friction during Drilling) and the nature of formation rock are conditions that are considered in determining the type of drilling fluid to be used. Oil-based mud generally reduces friction between the drill string and the wellbore. Also, naturally-occurring chemical elements or materials in the formations encountered may react with water-based mud, whereas oil-based mud is generally non-reactive.




Water-based mud is planned to be used for this well; however, contingency plans are in place to convert to an oil- or synthetic-based mud system should such a conversion be deemed necessary based on the above-described considerations. No system other than a water-based mud system will be used when drilling through freshwater zones near the surface, until such time that these freshwater zones are properly cased and cemented.


Drilling fluid and rock cuttings will be managed on the well pad using a closed-loop system; the drilling mud will be stored, mixed, contained, and cleaned using tanks rather than in-ground pits.

2.2.2.2.1 Drilling Fluid Components

Conditions within the wellbore will change as the drill bit is driven deeper below the ground surface and encounters older and more varied rock formations. These changes will affect the integrity of the wellbore, and may compromise the ability of the drilling fluid to perform its various functions properly. As such, drilling fluids consist of several components that are generally used in the drilling fluid mixture to achieve the correct balance of weight, viscosity, lubrication, and ability to withstand pressure and

LEGEND

-  METAL CASING
-  EXISTING GROUND
-  CEMENT

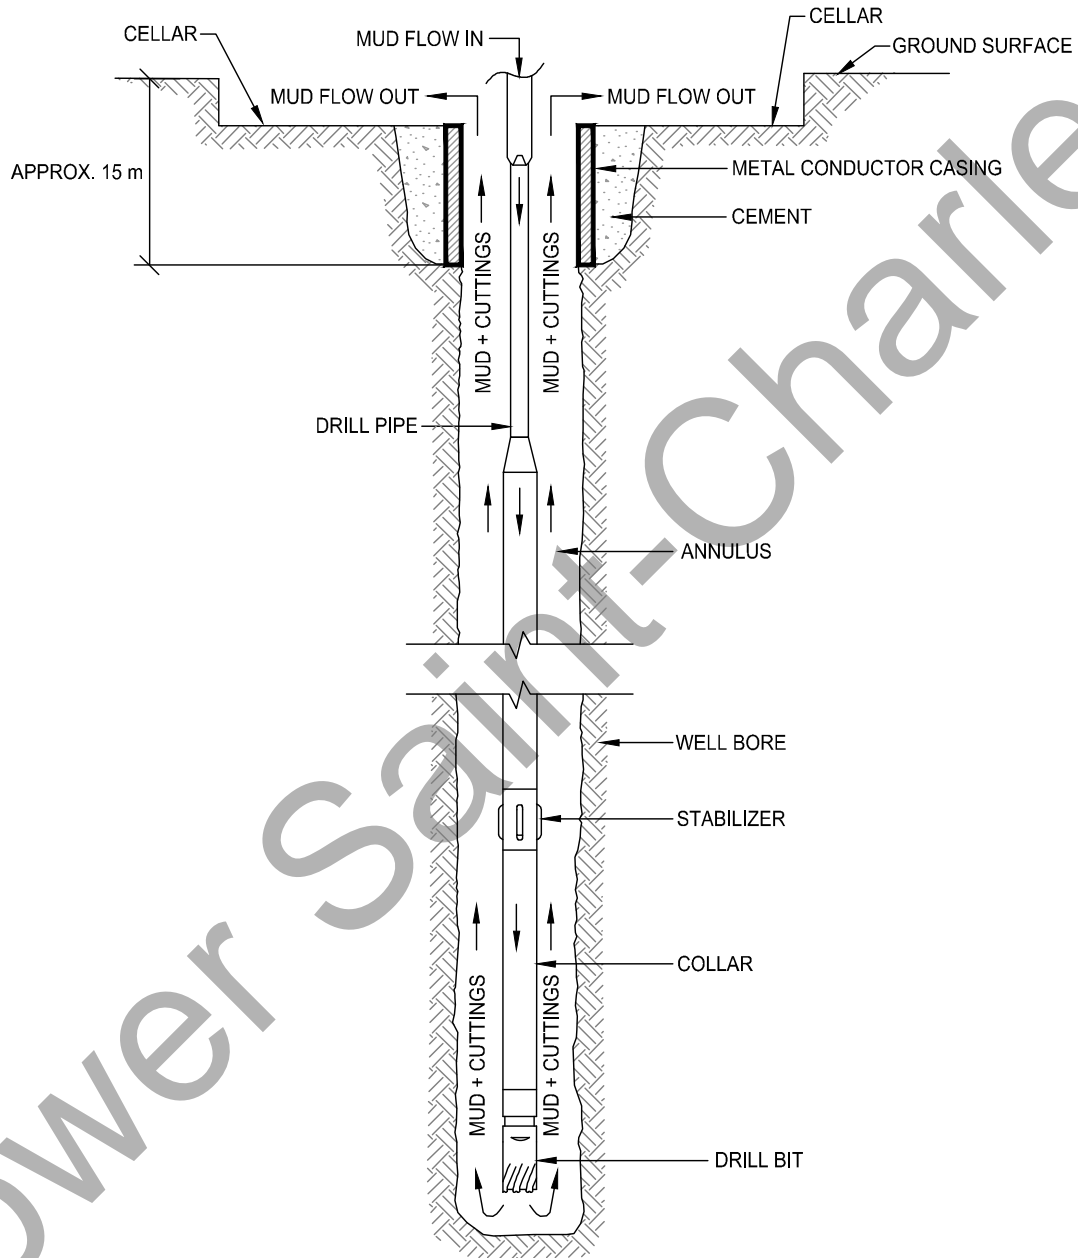

THIS DRAWING ILLUSTRATES SUPPORTING INFORMATION SPECIFIC TO A STANTEC CONSULTING LTD. REPORT AND MUST NOT BE USED FOR OTHER PURPOSES.

TYPICAL DRILL DETAIL

Job No.:	121810275
Scale:	NOT TO SCALE
Date:	2013 11 18
Dwn. By:	JL
App'd By:	MK

Fig. No.: 2.3



Client: SWN RESOURCES CANADA, INC.

[This page has been intentionally left blank.]

Lower Saint-Charles

The typical components of the drilling fluid, their relative approximate percentage weight (assuming a 1,100 kg/m³ freshwater system), and their key functions are listed below:

- freshwater (85–92%): main component of the drilling fluid;
- bentonite (2–8%): added to the drilling fluid to provide viscosity to carry drilled cuttings and carry weightings;
- polymers (0–0.7%): added to increase the viscosity and ability of the drilling fluid to carry drilled cuttings to the surface from the deeper depths;
- caustic soda and lime (0.5–2%): used to raise the pH and maintain the efficiency of the drill fluid (low pH (acid) is very corrosive on the metal components of the drilling rig; pH is usually kept in the 9–10 range because of the danger of the drilling fluid becoming acidic and can be varied, depending on other additives);
- lignite and calcium carbonate (0–0.7%): used to control fluid loss into porous rock formations within the wellbore;
- lignosulfonate (and sometimes lignite) (0–0.5%): used to deflocculate the drilling fluid by breaking down the large particles of amalgamated drilled solids so the fluid viscosity is decreased;
- gilsonite (0–0.5%): used to help stabilize any shale rock formations encountered in the wellbore; and
- weighting agents such as barite or calcium carbonate (0–8%): used to increase the hydrostatic pressure of the drill fluid column.

The drilled rock fragments that break away from the formations being drilled are referred to as “cuttings”. As the drill progresses into the ground, the cuttings are brought to the surface in the returning drilling fluid. At the surface, the cuttings are removed from the drilling fluid in a cleaning process. The cleaning equipment typically includes:

- a shale shaker, which is a set of vibrating screens to remove larger cuttings;
- a degasser, which removes any gases that enter the drilling fluid from drilled formations; and
- desanders, desilters or a centrifuge, all of which remove finer cuttings and other solids by centrifugal force.

Once cleaned, the drilling fluid is stored in a tank or multiple tanks on the surface until reused in the drilling fluid pumping system and again circulated through the well. Discarded drilling fluid will be diverted to a storage tank and gradually returned to the drill fluid system, or designated for off-site disposal at a waste management facility legally able to accept the discarded drilling fluid.

Cuttings and discarded drilling fluid will be analyzed on a routine basis for the presence of naturally-occurring radioactive materials (NORMs) and other contaminants. Based on the results of this analysis, a decision will be made as to where the cuttings can be sent for disposal. Prior to disposal, the cuttings and discarded drilling fluid will be dried by mixing them with sawdust, wood chips, or some other absorbent material; placed in storage tanks; and managed as outlined in Section 2.2.5.

2.2.2.3 Drilling Plan and Casing Design

It is predicted that the target depth of the well (1,000–4,000 m) will be reached in three drilling stages, with the section of the wellbore for each drilling stage cased with steel pipe cemented in place. Casing is threaded metal tubing installed within the wellbore. The purpose of casing and the surrounding cement is to:

- isolate and protect shallow ground water zones;
- protect the more fragile shallow bedrock formations from the higher hydrostatic pressures required for the deeper drilling sections; and
- effectively control the well and avoid upward migration of fluids or gases.

The staged process for drilling the stratigraphic well, along with supporting steps within the drilling process, is described below.

Figure 2.4 depicts a typical cross section view of a well, including a typical casing and cement design. In accordance with Section 2.20 of the Rules for Industry (GNB 2013), a casing and cementing plan will be submitted to the government department having jurisdiction (the “Regulator”) in advance of Drilling.





2.2.2.3.1 Conductor Hole


The conductor hole is the uppermost section of a drilled well. It will be a minimum of 20 m deep and may be drilled by a smaller rig in advance of the rig that will be used to drill the main well. The conductor hole will be located within a larger excavated hole that will be dug during the construction of the well pad. This excavated hole is called the “cellar”, and its functions are to provide access to the lower casing head and BOP valves and to be a sump hole used to capture any spilled drilling fluid during Drilling. The cellar is excavated and lined with either cement or corrugated culvert pipe with a cement floor. Any drilling fluid that is captured in the cellar is pumped to the drilling fluid cleaning units and is re-circulated into the drilling fluid system.

After drilling the conductor hole, steel casing (known as conductor casing) will be installed. The purpose of conductor casing is to keep the top of the wellbore (where there are much looser soils) from caving in and to provide a conduit to control and direct the flow of the drilling fluid returns to the drilling fluid cleaning equipment. The casing is inserted into the conductor hole, with the joints being threaded together at the surface. Construction grade cement will then be circulated into the annular space between the casing and walls of the wellbore and allowed to harden before further drilling takes place.

To provide an additional safety measure, the conductor casing will be equipped with a diverter system that can be used to facilitate well control if high-pressure formations are encountered while drilling the surface hole. This will allow any gases or liquids flowing out of the well to be directed away from the working area. The diverter is removed after running and cementing the surface casing and is replaced by the BOPs. Additional details are provided in Section 2.2.2.4.

LEGEND

-  METAL CASING
-  CEMENT FILL
-  DRILLING FLUID
-  EXISTING GROUND

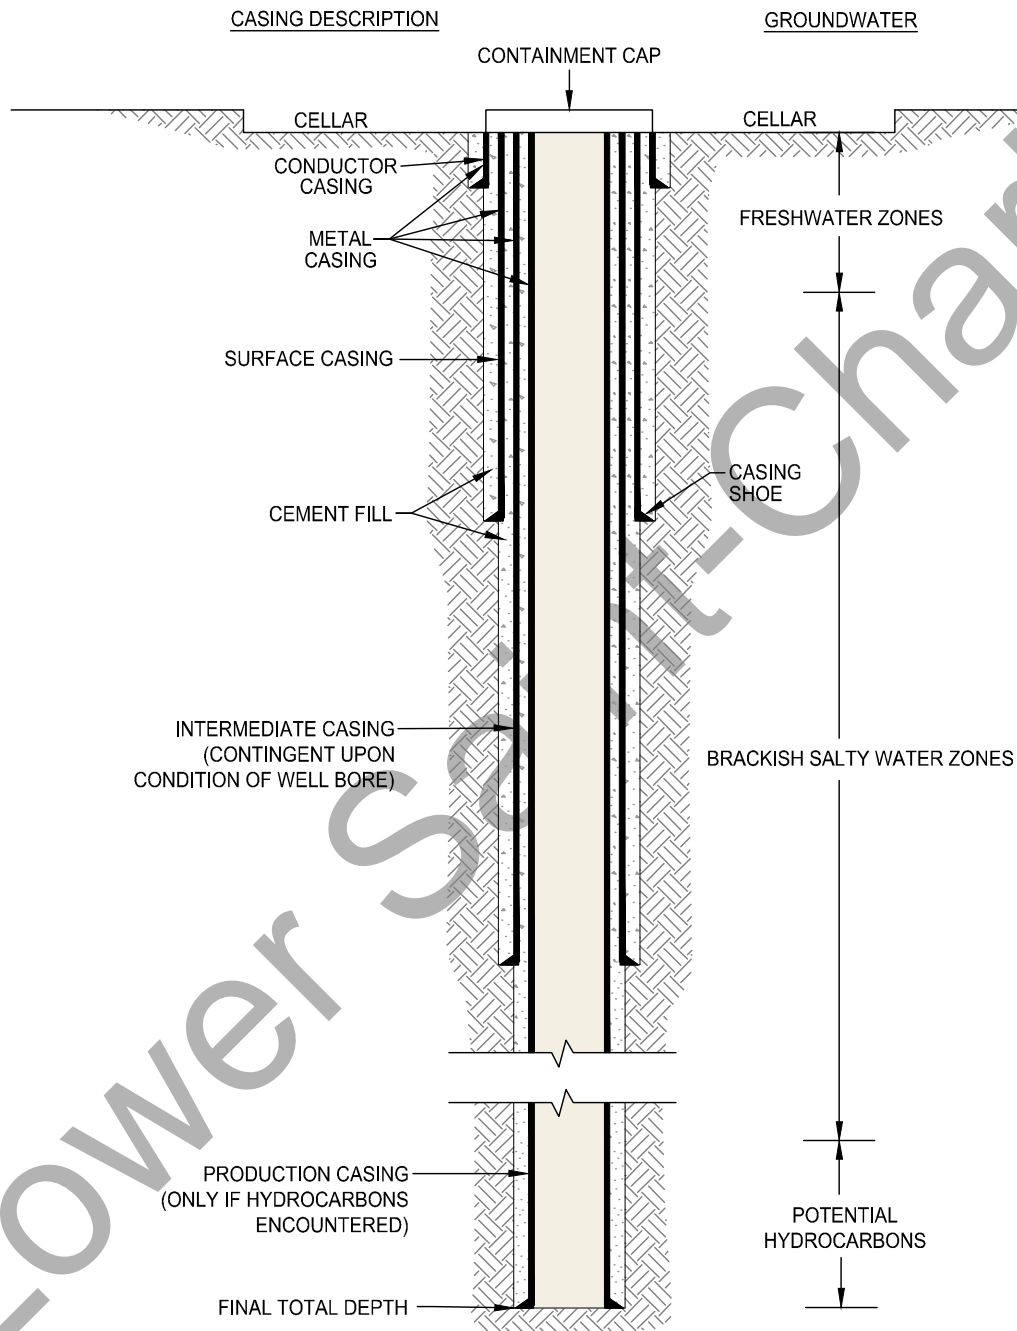

THIS DRAWING ILLUSTRATES SUPPORTING INFORMATION SPECIFIC TO A STANTEC CONSULTING LTD. REPORT AND MUST NOT BE USED FOR OTHER PURPOSES.

TYPICAL WELL CROSS SECTION
AND CASING DESIGN

Job No.: 121810275
 Scale: NOT TO SCALE
 Date: 2013 11 18
 Dwn. By: JL
 App'd By: MK

Fig. No.: 2.4



Client: SWN RESOURCES CANADA, INC.

[This page has been intentionally left blank.]

Lower Saint-Charles

After the completion of the conductor hole, the drilling rig to be used for the remainder of the drilling will be moved onto the well pad and set up.

2.2.2.3.2 Surface Hole

The next section of the well is referred to as the surface hole and is projected to be 300-400 m deep, although it may be deeper. The actual depth of this drilled section will depend on the nature of the formation being drilled in order to confirm that the bottom of the casing (the casing shoe) is in non-porous, competent rock, and is at least 25 m below formations that contain non-saline groundwater. The casing for this section is called surface casing. When the proper depth is reached, electric logs (electric resistivity, porosity, and gamma ray detection tools) will be run down the length of the well to provide a continuous record of the rock formations penetrated and also to verify water salinity throughout. This information aids drillers to identify the depth of freshwater zones relative to the depth of surface casing. It should be noted that 300 m is expected to be well below the anticipated depth of non-saline groundwater in this area. A more complete description of the logging program is discussed further in Section 2.2.3.

After it is confirmed that the surface hole extends to an appropriate depth pursuant to the criteria described above, the surface casing will be installed and cemented in place. The surface casing will be made of steel or alloy and will be designed to withstand the pressures, forces, and environmental conditions it will be subjected to. Just prior to setting the casing, drilling fluid will be circulated through the surface hole to condition the wellbore, removing any remnant cuttings and hole cavings so that the hole is stabilized to avoid the casing from getting caught due to blockages or friction before it reaches the bottom of the hole.

Bow type centralizers will be installed at appropriate intervals along the surface casing to confirm that the casing sits properly within the annulus. Appropriate intervals are defined by American Petroleum Institute (API) Recommended Practice 10D2, "Recommended Practice for Centralizer Placement and Stop Collar Testing" (API 2013). Class A Portland cement, which will develop a minimum compressive strength of 3,500 kPa, will then be circulated down inside the casing and up the annular space between the surface casing and walls of the wellbore using the circulation method.

During the cementing operation, the casing will be moved up and down continuously to improve the likelihood that cement fully displaces all drilling fluid between the casing and wellbore wall and does not leave any voids. Cement will be pumped down the inside of the casing until it is circulated back to surface on the outside of the casing. The pumping or "displacement" rate of the cement will be as high as practical so that cement in the annulus achieves turbulent flow to greatly reduce the potential of leaving voids in the cement in the annulus.

The amount of cement to be pumped will be adequate to fill the annular volume with a safety factor in accordance with requirements listed in Section 2.13 of the Rules for Industry (GNB 2013). This volume will be mixed and pumped into the wellbore. In the event cement does not reach surface, a small pipe will be run down the outside of the casing from surface to the top of the cement. When the top of the cement column is encountered, the well will be circulated with drilling mud to confirm that there are no cuttings or cavings restricting full annular flow. Once clean, additional cement will then be mixed and pumped down the pipe until clean cement is recovered from the annulus at surface.

If there is doubt as to the effectiveness of the surface casing cement, or if shallow gas zones are encountered during the drilling of the surface hole, a cement evaluation technique approved by the Regulator will be used to determine the quality of the cement in accordance with Section 2.18, of the Rules for Industry (GNB 2013). If problems are detected, a remedial cementing plan will be developed and submitted to the Regulator for approval prior to being implemented, in accordance with Section 2.16 of the Rules for Industry (GNB 2013).

Cement will be left to cure for approximately 8 hours to allow it to achieve the target compressive strength of at least 3,500 kPa. The curing time could potentially be shorter than 8 hours if pursuant to the results of a bench test and consultation with NBDEM. Bench tests will be conducted in accordance with API Recommended Practice 10B2 "Recommended Practice for Testing Well Cements" (API 2013) prior to cementing being performed.

2.2.2.3.3 Function and Pressure Testing

Following installation and cementing of the surface casing, the BOP stack (see Section 2.2.2.4 for description and discussion of the BOP System) will be installed directly on top of the casing head by bolting the bottom flange of the stack to a casing bowl that will be threaded or welded to the top of the casing. The BOP stack will consist of several specialized valves used to seal, control, and monitor any significant increases in pressure encountered within the wellbore during Drilling.

Once installation of the BOP stack is complete, two tests will be performed on the components in accordance with ERCB Directive 036 (2006): a Function Test and a Pressure Test. The Function Test will be conducted to confirm that all components are functioning properly. The Pressure Test will be conducted to confirm that all of the drilling components and the surface casing are properly sealed and can withstand the pressures that might be encountered once Drilling resumes. Pressure tests will be completed at both a high pressure and a low pressure, where the specific test pressure applied depends on the component, stage of drilling, and other drilling criteria (see ERCB Directive 036 for additional detail). Pressure tests will be conducted so that all components of the system are tested in the critical direction.

Each pressure test will be accomplished by pumping drill fluid into a space confined by the components to be tested, bringing that volume up to the desired pressure, and holding it for a set period of time. If the pressure drops, the leak is located and repaired, and the test is re-run. When all the tests have passed and it is determined that it is safe to proceed, the drilling will resume and proceed into the next bedrock formation.

Function tests will be performed daily and/or each time the drill string is pulled to surface, depending on the component.

2.2.2.3.4 Final Hole Section

After drilling the cement shoe and 2–3 m of new rock formation, drilling will be halted and a formation integrity test (FIT) will be performed. A FIT is completed by slowly applying pressure to the wellbore using drilling fluid to confirm that the strength of the cement at the casing shoe and the rock directly beneath the bottom of the casing is adequate to withstand the maximum anticipated hydrostatic pressure of the drilling fluid column. A FIT is necessary to determine the safe value, so that the pressure applied to the uncased formation does not exceed the known formation strength.

Upon completion of the FIT, drilling will continue. Throughout the drilling of the final hole section, particular attention will be paid to the cuttings and drilling fluid circulated from the well in order to detect any abnormal pressures, escaping fluids, and other information important to drilling safety. Samples of the cuttings will be collected and examined, then bagged and dried, and they will form part of the permanent well record. Drilling will continue until final total depth is reached and electric logging is completed (see Section 2.2.3 – Well Logging).

If any issues are identified during drilling (e.g., the wellbore formation walls becoming unstable, lost circulation of drilling fluids, or indicated unsafe formation pressures), a contingency casing (also referred to as intermediate casing) may be installed within and below the surface casing to isolate the wellbore. As with the surface casing, this casing will be made of steel or alloy and will be designed to withstand the pressures, forces, and environmental conditions to which it could potentially be subjected. Bow type centralizers will be installed to maintain the casing string in the center of the wellbore.

Once the contingency casing is in place, the hole will be conditioned. Then cement will be pumped into the annulus using the circulation method (as described for the surface casing). Depending on the geologic conditions and temperatures encountered in the hole section being cased, either Class A or Class G Portland cement with a minimum cured compressive strength of 3,500 kPa will be used. The amount of cement to be pumped will be adequate to fill the annular volume with a safety factor in accordance with requirements in the Rules for Industry (GNB 2013). A cement evaluation log will also be conducted from the top of the shallowest porous zone to the top of cement to verify that hydraulic isolation has been achieved.

Once the cement has cured, a pressure test will be completed to verify wellbore integrity. If any issues are encountered, pursuant to Section 2.16 of the Rules for Industry (GNB 2013), a remedial cementing plan will be developed and submitted to the Regulator for approval prior to being implemented. After drilling the cement shoe and 2–3 m of new formation, a FIT will be performed and, upon its completion, drilling will continue.

When the well has reached its final total depth, a complete set of logs will be run. The logging program is discussed further in Section 2.2.3.

Upon completion of drilling and logging the final well section, a decision will be made as to whether any of the formations encountered are suitable for further evaluation. Well logging is further described in Section 2.2.3. If logging identifies hydrocarbon potential and additional testing or exploration is desired, the decision will be made to install additional casing over this final section of the wellbore, and operations will be suspended pending additional Phased EIA Submissions or EIA registrations for further

work. Additional casing will be installed and cemented using the same procedures as used on the contingency casing. The well will be secured for the protection of safety and the environment.

Alternatively, if the formation is determined to be non-viable, no casing will be run, cement isolation plugs will be set in the hole, the well will be permanently decommissioned, and the PDA will be restored. Additional well decommissioning and site restoration details are provided in Section 2.2.4.

2.2.2.4 Formation Pressure Management and Blow-Out Preventers

During activities, formation fluids, salt water, oil, and gas may be encountered within the rock formation being drilled. The pressure of these fluids is controlled by varying the density of the drilling fluid so that the pressure does not exceed the hydrostatic head (*i.e.*, the weight) of the drilling fluid in the wellbore above it. If the *in situ* pressure of these fluids exceeds the hydrostatic pressure of the drilling fluid column and they are in a permeable formation, they may enter the wellbore and travel up the annulus with the circulating drilling fluid. As this gas rises up the annulus, hydrostatic pressure decreases. This allows the gas to expand, taking up an increasing percentage of the overall mud column. Since gas is much lighter than drilling fluid, this phenomenon decreases overall hydrostatic pressure at the formation, allowing more formation fluids to enter the wellbore. If left uncontrolled, the process would repeat itself and become dangerous.

Identification and safe management of these sub-surface pressures is essential to maintaining overall safety of the drilling process, through the following measures:

- Pre-planning: Prior to the start of Drilling, information on the sub-surface rock formations is gathered from available sources such as NBDEM, other operators, and the results of the geophysical (seismic) survey. Based on this background research (continually upgraded by on-site observation), the drillers develop an understanding of whether or not there is a potential to encounter abnormally-pressured formation fluids.
- Monitoring: Small amounts of natural gas are released from the rock as it is drilled (see Section 3.4.1.2.2 for further information). The level of natural gas circulated to surface in the drilling fluid ("background gas") is continuously monitored. An increase in this reading usually indicates that the density of the drilling fluid must be increased. This is achieved by adding weighting materials, such as barite or calcium carbonate, to the drilling fluid.

- Secondary Monitoring: If a porous formation is encountered while drilling, as indicated by an increase in drilling rate, drill string rotation and pumping are immediately stopped for a predetermined amount of time. The well is monitored for flow during this time to confirm that fluids in this section are not at a higher pressure than the hydrostatic head of the drilling fluid column.
- Detection: The presence of a gas pocket moving up the annulus is detected by an increased volume of drilling fluid in the mud pits or by an increase in the flow rate of the drilling fluid returns from the wellbore. Both of these phenomena are detected by mechanical means attached to alarms.

In most cases, these high-pressure formations are encountered at greater depths after the surface hole is drilled. However, it is also possible for high-pressure formations to exist near to the surface. Because no previous oil and gas drilling has taken place in the general area of the Project, well control equipment must be installed on the conductor casing during shallow drilling, as well as during drilling on deeper formations.

The equipment for managing any significant increase in pressure within the wellbore is called the BOP. The BOP is used to safeguard against blow-out incidents and to mitigate pressure increases by engaging equipment to block the annular portion of the wellbore, redirect well flow, or block off the well completely. The anticipated configuration of the BOP will differ between shallow and deeper drilling. Both BOP configurations are shown in Figure 2.5, although the exact configuration of the equipment may vary based on the type of drilling rig being used and equipment available.

In the event of high pressures being encountered in shallow formations, the conductor casing shoe may not be strong enough to withstand high pressure, and therefore the BOP will consist of a single annular preventer. If this BOP is engaged, well flow will be directed through a remotely-actuated diverter valve (HCF valve) to a flare tank that is situated away from the well head. This redirection of well flow is intended to allow fluids or gases encountered to flow away from working areas, thereby protecting personnel, equipment and the environment. It is common that shallow pockets of pressure are of limited extent and therefore easily depleted by controlled flow.

After the cementing of the surface casing, the shallow BOP equipment will be replaced with a more robust configuration better suited to manage the potential high pressures that could be encountered in deeper formations. When activated, this BOP and associated control valves effectively close in the well. The surface pressure is allowed to build and stabilize. The required mud weight to overcome the fluid influx can be calculated by using this stabilized pressure and by knowing the depth of the well and the weight of the drilling fluid column. Most of this weight is then mixed and circulated into the well while controlling the back pressure at surface by means of an adjustable choke. In only the most extreme and rare situations, the system allows controlled venting of gas or flow of fluids (similar to what was described for shallow pressure formations) to avoid compromising the weaker formations near the casing shoe.

This BOP stack will consist of many more components than the previous diverter system. Arrangement of the stack will include:

- an annular preventer;

- at least two Ram-type preventers;
- flow lines with hydraulic and manual valves to restrict or permit well flow in a well control situation;
- pump-in lines to add weighted fluid to the annulus side of the well system;
- pressure gauges; and
- a remote choke manifold equipped with hydraulic and manual chokes and numerous control valves.


The main components and function of each component to be used as part of the primary BOP at the PDA are described in Table 2.1.

Table 2.1 Blow-Out Preventer Components


Name	Description
Annular Preventer	Acts like a balloon to physically block the annulus.
Pipe Ram	Closes like a door over the casing and annulus with a space for the drill string and tubing.
Blind Ram	Closes like a door over the casing and annulus with no space for the drill string and tubing; would be used if well flow is detected when there is no pipe in the hole.
Choke Line	Used to circulate fluid or gas out of the wellbore during instances when a ram or annular preventer is engaged.
Kill Line	Used to circulate drilling fluid into the annular side of the wellbore during instances when a ram or preventer is engaged and normal circulation is not possible.
Choke Manifold	A series of valves and chokes used to control the well in the event of significant well flow.

The BOP components will be equipped with remote actuators that are capable of operating independently of the rig power source and located at least 25 m away from the well head. The BOP actuator will also be equipped with a back-up power source. All lines, valves and fittings connecting the BOP and the remote actuator will be flame resistant and have a working pressure rating higher than the maximum anticipated wellhead surface pressure.

Each drill crew will be trained in the operation of the BOP and specifically on proper procedures to follow in any abnormal pressure situation. The driller provided by the drilling contractor will have a "First Line Supervisor" certificate in blow-out prevention and kick control procedures, issued within the last three years. The drilling contractor will also provide at least one person on-site who has a "Second Line Supervisor" certificate in well control procedures issued within the last two years, both by ENFORM (ENFORM.ca) or an equivalent agency. The SWN RC site representative will also have a Second Line Supervisor certificate in well control procedures issued within the last two years. Blow-out drills will be performed before drilling out any casing shoe and once a week by each crew thereafter, and these drills will be recorded in the daily drilling log book. Also, the procedures, calculations, formulas and current data needed to control a kick at the well will be posted at the rig at all times.

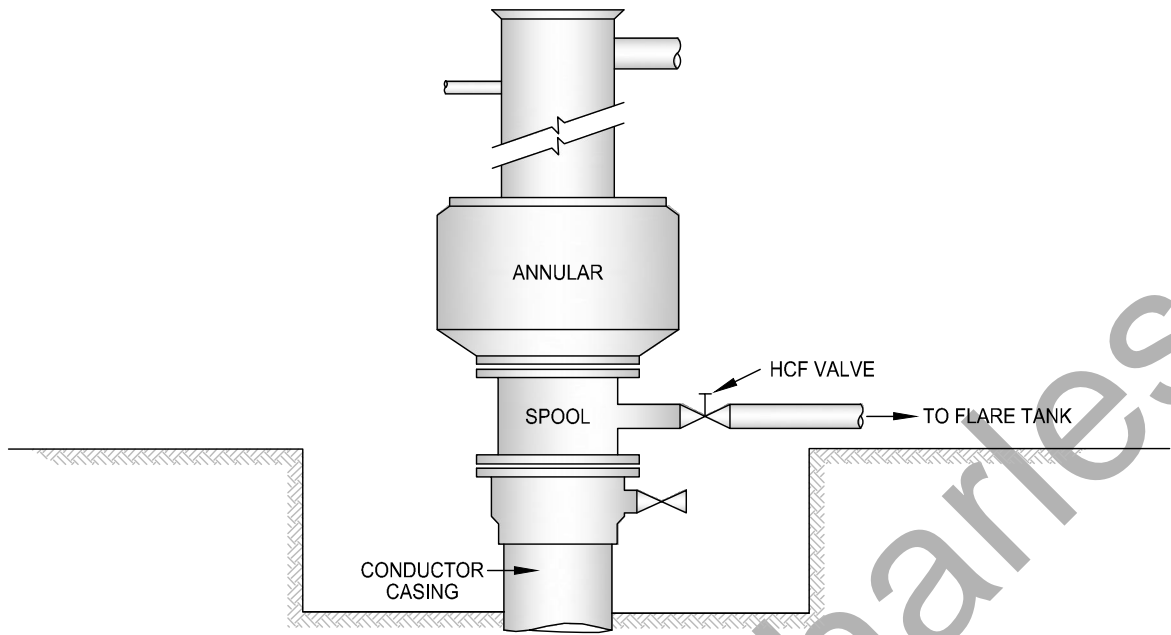

ARRANGEMENT OF BOP COMPONENTS TO BE USED WHEN DRILLING SURFACE HOLE
1 ANNULAR PREVENTER AND DIVERTER LINE
 N.T.S.

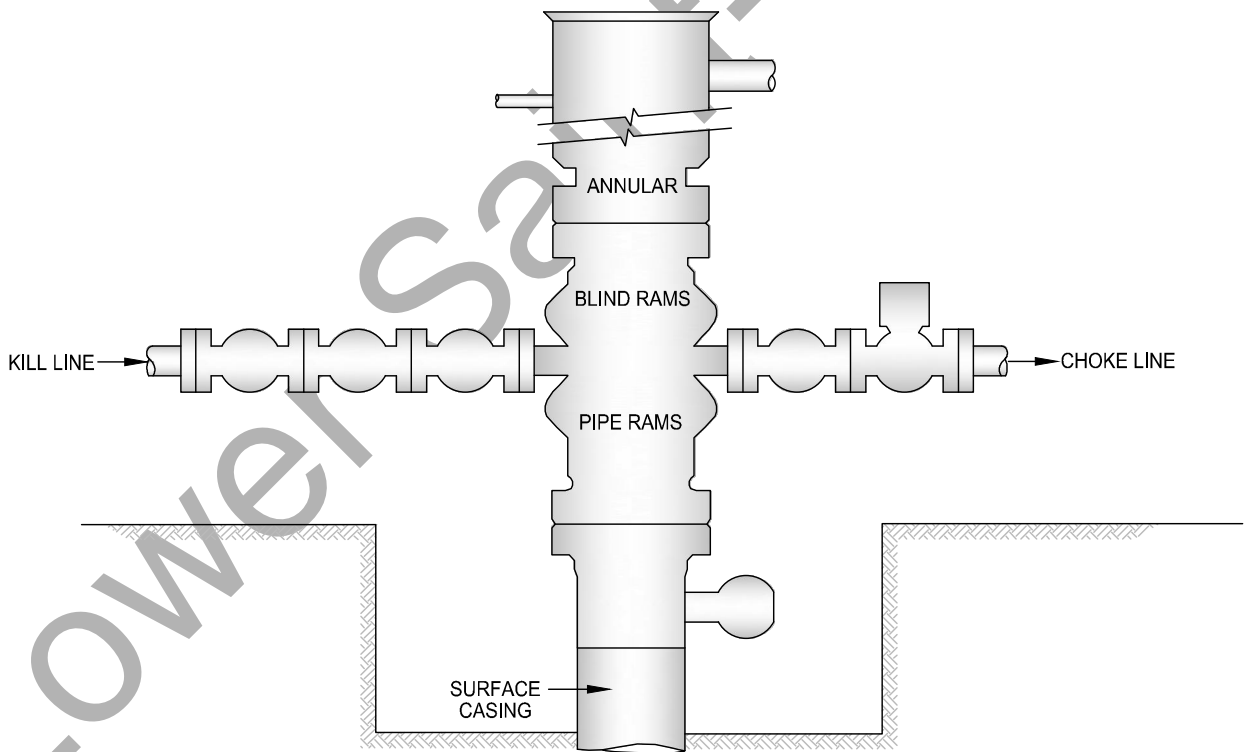

ARRANGEMENT OF BOP COMPONENTS TO BE USED WHEN DRILLING DEEPER FORMATIONS
1 ANNULAR PREVENTER, 2 RAM PREVENTERS
 N.T.S.

THIS DRAWING ILLUSTRATES SUPPORTING INFORMATION SPECIFIC TO A STANTEC CONSULTING LTD. REPORT AND MUST NOT BE USED FOR OTHER PURPOSES.

BLOW-OUT PREVENTER EQUIPMENT

Job No.: 121810275
 Scale: NOT TO SCALE
 Date: 2013 11 18
 Dwn. By: JL
 App'd By: MK

Fig. No.: 2.5



Client: SWN RESOURCES CANADA, INC.

[This page has been intentionally left blank.]

Lower Saint-Charles

2.2.3 Stratigraphic Examination (Well Logging)

Before Drilling begins, all available information will be reviewed to provide an indication of the likely characteristics of the stratigraphy at the Site, such as local hydrology, topography, depth-to-water-table data, and seismic results. Available well logs from other drillers will also be examined in addition to information from NBDEM for exploratory wells it has drilled in the province.

As Drilling proceeds, information about this particular well will be recorded. Two different well-logging techniques will be used to examine and record the stratigraphy. The first, Geological Logging, consists of a visual examination of cutting samples collected at surface and continuous recording of data such as gas in the drilling fluid and bit penetration rate. The samples are visually inspected and described in terms of various material characteristics such as mineral type, density, porosity, hydrocarbon concentration, and the depth from which information was collected.

The second technique, Electric Logging, includes the use of electronic measurement devices that are connected to a multi-wire cable and lowered into the wellbore through a depth measurement tool. Signals from these devices travel up one or more wires within the cable and are collected at surface, translated into data, and presented together as a value-versus-depth trace on paper or computer. Some of the more common electric logging tools are described below.

- Resistivity Log: Resistivity logs measure the conductivity of adjacent formations at various distances from the wellbore. This information may be used to identify the type of fluid in porous formations and changes in formation rock and provides an estimate of formation permeability. This log can also yield the conductivity of water, providing a measure of salinity. This information is also used to aid in identifying the depth of freshwater zones.
- Gamma Ray Log: This tool measures naturally-occurring gamma ray emissions from the formation and can be used as an indicator to differentiate between shale and non-shale formations and systems.
- Sonic Log: This tool provides an estimate of formation porosity by measuring the speed of sound in adjacent formations.
- Neutron log: This tool provides a second and complementary estimate of porosity by bombarding the adjacent formation with neutrons and identifying and measuring the resulting emitted radiation.

Taken together, the above data collection will be used to determine and record the nature of the sub-surface rock, in terms of materials (rock types and entrapped fluids) and structure (layering). Although the technology is sophisticated and the interpretation of the data is done by experienced scientists using highly complex computer programs, the information is not exact and must be considered in the context of all other known information about the Site. No single method accurately describes the structure and characteristics of the formations below the surface. Professional experience and technology are used in combination to infer the nature of sub-surface rock.

2.2.3.1 Decision to Restore the Site or Proceed with Further Evaluation

Based on the data collected during all previous exploration activities as well as from stratigraphy examination (in particular well logging), SWN RC will decide whether to proceed with further evaluation of this well, or to decommission the well and restore the PDA if no further testing of the well is warranted (as described in Section 2.2.4). Should it be decided to proceed with further evaluation, SWN RC would gather all available information and prepare a separate Phased EIA Submission or EIA registration.

2.2.4 Decommissioning and Restoration

If SWN RC decides not to proceed with further evaluation at the Site, the well will be permanently plugged and decommissioned, and the PDA will be restored. The details of the decommissioning and restoration of the PDA will be developed in consultation and agreement with the Regulator. The well will be plugged using cement to continue to protect subsurface resources, groundwater, surface water, air, and soil. As shown in Figure 2.6, cement plugs will be placed within uncased portions of the well as needed to verify that the hydrocarbon-bearing zone and the freshwater-bearing zone are properly isolated from one another.





These cement plugs will extend for at least 15 m above and below any hydrocarbon or freshwater zones, and plug at least 15 m above and below the lowermost casing shoe. If competent rock is not encountered at the base of the well, a 15 m cement plug will also be placed at the bottom of the well. Additionally, a cement plug of at least 45 m in length will be set in the casing no more than 45 m below ground-level. Depending on circumstances and availability, a permanent bridge plug and cement may be set in lieu of the one or more of the cement plugs described above. Depths and lengths of these plugs will be based on information obtained from drilling and wireline logs, and will be agreed to in consultation with the Regulator.

Once the well is plugged, conductor and surface casings (and intermediate casing, if present) will be cut off and capped at 1.5–2.0 m below ground-level. The cellar will be filled in, and a steel pipe permanently marked with the well location information will be welded to the casing cap and extended at least 1 m above ground.


The remainder of the PDA will then be decommissioned and restored as follows. All surface equipment and buildings will be removed from the well pad, disturbed areas will be returned to as close to pre-construction grades as possible, and stockpiled organic material/topsoil will be distributed across the disturbed areas. Re-vegetation of the PDA will be considered to avoid soil erosion or siltation of watercourses. Site-specific details guiding restoration will be determined during a pre-construction site assessment of soil, vegetation, drainage, and topography, which will be conducted prior to land clearing (see Section 2.2.1.1).

An environmental site assessment will be conducted following decommissioning and prior to restoration, to confirm that no contamination of soil or groundwater has occurred at or near the PDA as a result of Project-related activities.

LEGEND

-  METAL CASING
-  CEMENT FILL
-  DRILLING FLUID
-  EXISTING GROUND

* NOTE: STEEL PLATE WILL BE PLACED OVER THE WELL. THIS WILL BE BURIED 1.5 m (AT MINIMUM) BELOW GROUND. A MARKER POST (1 m TALL) WILL INDICATE THE WELL LOCATION.

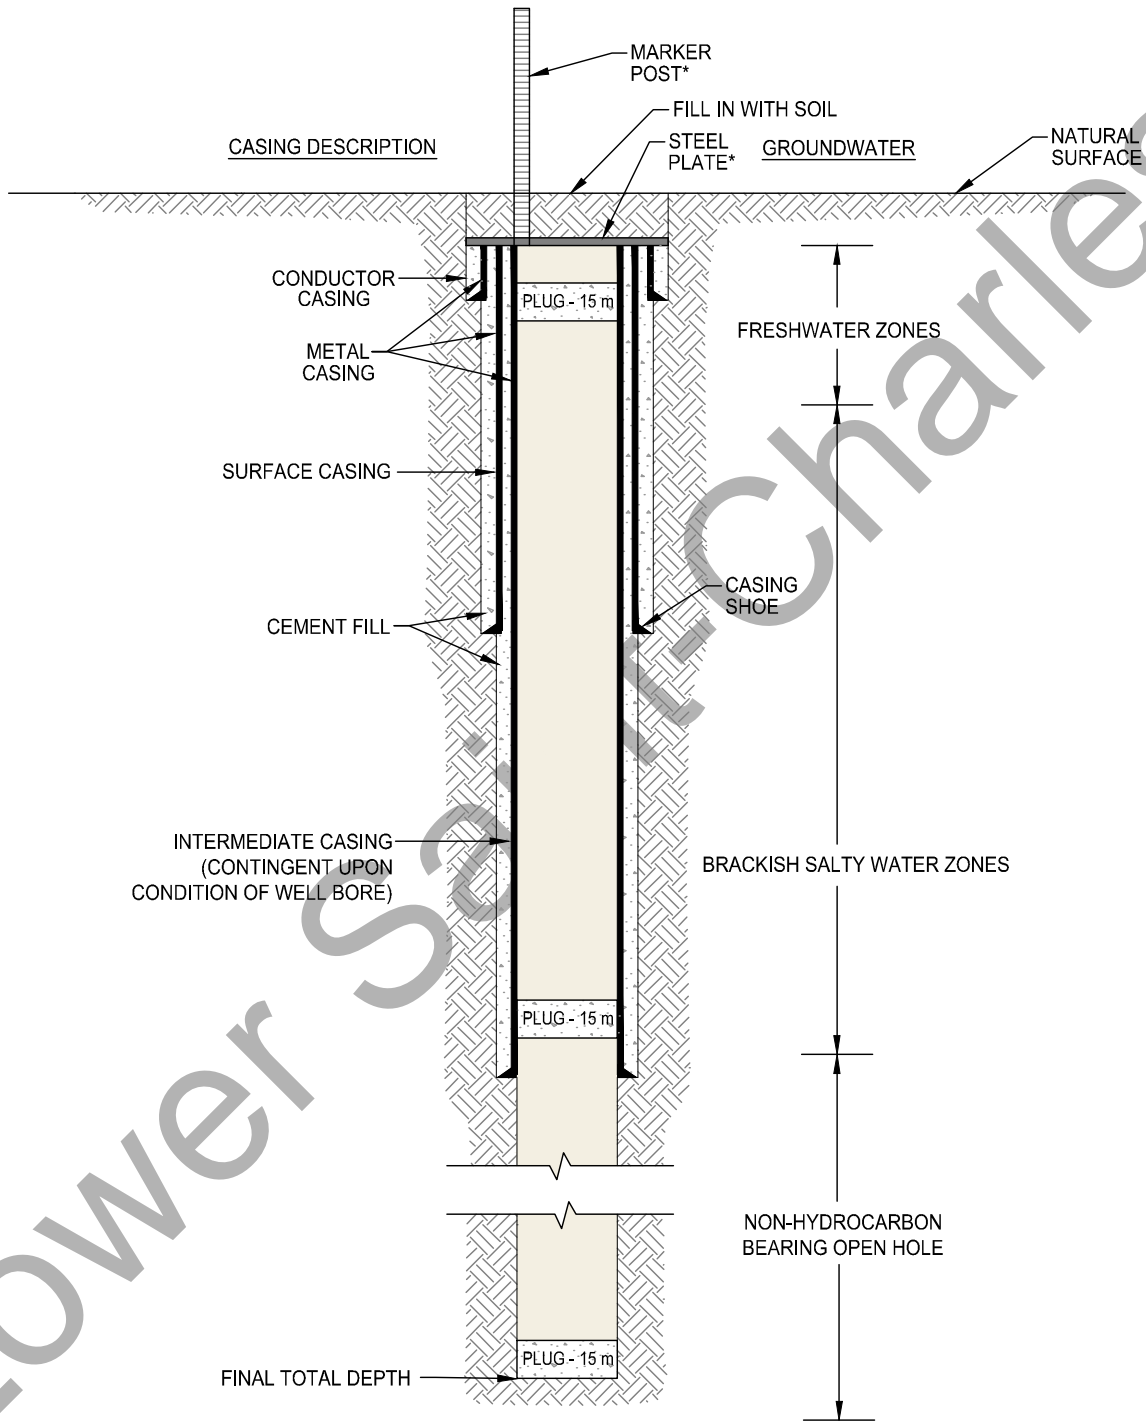

THIS DRAWING ILLUSTRATES SUPPORTING INFORMATION SPECIFIC TO A STANTEC CONSULTING LTD. REPORT AND MUST NOT BE USED FOR OTHER PURPOSES.

TYPICAL CASING DETAIL: NON-VIABLE WELL:
PLUG AND DECOMMISSIONING

Job No.:	121810275
Scale:	NOT TO SCALE
Date:	2013 11 18
Dwn. By:	JL
App'd By:	MK

Fig. No.: 2.6



Client: SWN RESOURCES CANADA, INC.

[This page has been intentionally left blank.]

Lower Saint-Charles

2.2.5 Materials and Waste Management

The materials used for the Project, and the associated emissions, wastes, and waste management practices are discussed in this Section.

2.2.5.1 Water Sourcing

Water will be required during Drilling in order to mix drilling fluid and cement, to clean equipment, for use in the living quarters, and for other general purposes. Specific consideration has been given to both the quantity and quality of water required to complete planned activities. In order to drill the well and carry out the associated activities, approximately 1,200–1,600 m³ of water are expected to be required at the Project Site. The following options will be considered for the supply of water, in order of preference:

- an existing industrial water supply;
- untreated water from a nearby municipal water supply; or
- surface water from a nearby watercourse withdrawn at rate less than 50 m³/day.

Small quantities of potable freshwater from a nearby municipal water supply will also be used at the Site for domestic purposes. Drinking water stored at the Site will be tested and stored in accordance with Section 4 of the New Brunswick *General Regulations—Occupational Health and Safety Act*, Regulation 91-191.

2.2.5.2 Transportation

Transportation for the Project will occur in four distinct stages: well pad and access road construction, drill equipment mobilization, drilling support, and drill equipment demobilization. A summary of the transportation needs for the Project is provided in Table 2.2.

Table 2.2 Estimated Total Number of Truck Loads

Stage of the Project	Description	Estimated Total # of Truck Loads (Round-Trip)
Construction (well pad and access road)	Construction equipment and materials (e.g., excavators, gravel).	<ul style="list-style-type: none"> • Equipment Mobilization: 5–7. • De-mobilization: 5–7. • Gravel, water: < 350, depending on-site conditions and if imported fill material is required.
Drill Equipment Mobilization	Drilling equipment and ancillary elements (e.g., drilling rig components, logging and cementing equipment and Site buildings).	<ul style="list-style-type: none"> • 40–50.
Drilling	Drilling materials, equipment, and waste (e.g., casing, cement, cuttings, supplies, water).	<ul style="list-style-type: none"> • 100–150.
Drill Equipment De-mobilization	Drilling equipment and ancillary elements are removed from the well pad (e.g., drilling rig components, logging and cementing equipment and Site buildings).	<ul style="list-style-type: none"> • 40–50.

Vehicles and equipment used for construction of the well pad and access roads will include (and will not be limited to) excavators, bulldozers, rollers, dump trucks, and graders. Most of these vehicles operate on diesel fuel and require some form of daily maintenance. Truck traffic generated by the Project during well pad and access road construction is largely dependent upon the amount of imported material required. If *in situ* soil conditions are not suitable for construction of the sub-base and base, aggregate will be obtained from off-site local borrow pits or quarries, and the amount of truck traffic on the access roads will increase accordingly. *In situ* material, from within the boundary of the PDA, will be used wherever possible. Construction equipment will also need to be transported to and from the Project Site, however this is not expected to result in a substantial amount of traffic.

Truck traffic generated by the Project leading up to and during Drilling will consist mainly of the mobilization and demobilization of drilling-related equipment and associated supplies to the Project Site. Transport trucks, which operate using diesel fuel, will be the main vehicle used for transporting equipment and supplies. A combined 80-100 loads of equipment and supplies are expected to be transported to and from the Site as part of the mobilization (40–50 loads) and demobilization (40–50 loads) of Drilling supplies and equipment.

Truck traffic will also be required during Drilling to transport freshwater, drill cuttings and various materials for drilling (e.g., casing, cement, drilling fluid materials). If not sourced from local surface water, it is anticipated that approximately 70–80 tankers of water will be required for drilling. Approximately 40–60 truckloads of cuttings will be generated and potentially shipped to a waste management facility legally able to accept the cuttings. In total, it is estimated that approximately 150 loads of water, cuttings and materials will be transported during Drilling. Transport traffic will be limited to the preferred access routes (Figure 1.1), namely Route 11 and Saint-Charles Road South near the interchange with Route 11 (should access road Option 3 be selected), unless this route becomes unavailable. The preferred access routes are selected to avoid increased truck traffic through collector roads in rural residential areas. Trucks using local and collector highways for access to the Project will be subject to applicable speed limits, designated postings, provincial gross vehicle weight maximums and spring weight restrictions. Where practical, transport traffic will be avoided in populated areas during school transportation hours (*i.e.*, peak morning and afternoon traffic periods for buses), and oversize loads will be transported in good visibility.

2.2.5.3 Emissions and Waste Management

The following different types of emissions and waste will be produced during the Project:

- drill cuttings;
- drilling fluid;
- cement;
- solid waste;
- wastewater;

- air contaminant emissions; and
- petroleum, oil, and lubricants (POLs).

All waste materials produced as part of the Project will be managed to avoid contamination of soil, surface water, and groundwater. Waste management procedures will comply with Sections 4.4 to 4.7 and Section 4.9 of the Rules for Industry (GNB 2013) as well as any disposal/treatment facility requirements. Waste will be characterized as required prior to being transported to verify that chemical parameters are within the acceptance criteria of the facility intended to receive the waste. Waste types and disposal options are described below.

2.2.5.3.1 Drill Cuttings

Approximately 200–400 m³ of drill cuttings will be generated during the Project. These cuttings will be separated from the drilling fluid using shakers and centrifuges and then directed to an on-site storage tank. Generally these drill cuttings are expected to be inert, however there is a small possibility they may contain trace concentrations of heavy metals, sulphides, chlorides, NORM, or hydrocarbons, depending on the type of rock formations being drilled. Such elements would be identified by the on-site geologist examining the cuttings or as part of subsequent laboratory analysis.

The nature of the cuttings will also depend on composition of the drilling fluid being used. If drilling uses water-based mud (as planned), it is unlikely that any petroleum-based additives will be required. If the contingent oil-based mud is used, cuttings from that section of the well will contain hydrocarbons. Once the material is characterized, drill cuttings will be transported to a waste management facility legally able to accept the waste with the concentrations of chemical parameters identified. On-site disposal of drill cuttings may be considered if this is determined to be acceptable in consultation with the Regulator and pursuant to the process outlined in Section 4.7 of the Rules for Industry (GNB 2013).

2.2.5.3.2 Drilling Fluid (Mud)

Upon the completion of drilling activities, any drilling fluid remaining will either be recovered and reused during subsequent drilling operations or transported to a waste management facility legally able to accept such waste.

If NORM is detected in the cuttings, spent drilling mud will also be analyzed for NORM and if present, will be disposed of at a facility legally able to accept such waste.

2.2.5.3.3 Cement

During the installation of the casing, cement will be used to seal the casing in place, and this will likely result in small amounts of waste cement being generated at the surface. This waste cement will be collected and disposed of at a construction and demolition debris disposal site or other facility legally able to accept the material.

2.2.5.3.4 Solid Waste

Solid waste will be generated at the Site in small quantities. This includes mostly domestic waste (i.e., general refuse) from staff working at the Site, as well as minor amounts of construction waste that may include spent containers, grease tubes, engine oil containers, cans and sacking from drilling fluid additives, welding rods, slag, and worn or broken mechanical components. These materials will be stored in a dumpster marked for general refuse only and shipped periodically to the regional sanitary landfill.

2.2.5.3.5 Wastewater

Septage generated at the Site from washroom facilities in the Site buildings will be collected within storage tanks. Vacuum trucks operated by approved septage haulers will periodically empty these tanks and dispose of the septage at municipal sewage treatment facilities. Consideration will also be given to separating gray and black domestic waste water and recycling or disposing of the gray water on-site.

Surface run-off on the PDA will be managed as per Section 2.2.1.3. Excess surface water collected at the PDA, from within bermed and lined areas, will be temporarily stored in on-site containers until it is collected and trucked to a wastewater treatment facility legally able to accept such waste.

2.2.5.3.6 Air Contaminant Emissions

All equipment on-site will be motorized or run from on-site diesel engines or generators. All such equipment will be fitted with proper exhaust systems to minimize noise and emissions.

Dust that may be generated as a result of having a large surface area of exposed soils will be managed through the application of water or water containing lignin-based dust suppressants.

2.2.5.3.7 Petroleum, Oil, and Lubricants

Waste POLs, used containers, rags, contaminated soil or water, will be disposed of at a facility legally able to accept these wastes. There are several used oil collectors that are authorized to receive many of these materials.

The strict management practices and environmental protection measures that will be followed when managing POL are discussed in detail in the Environmental Protection Plan (EPP) for the Project (provided under separate cover). Some of the general measures to be implemented at the Site include:

- fueling and lubrication of equipment will be carried out in a manner that limits the possibility of spills;
- fuel storage will be equipped with secondary containment with sufficient capacity to contain 110% of the largest single tank or of all the connected tanks (whichever is greater);
- waste containers for temporary on-site storage of spill clean-up materials will be located in a secure, covered area, where rain water cannot come into contact with these containers;

- spill kits will be readily available on-site; and
- all workers on-site will receive training in the prevention, control, and clean-up of spills.

2.3 PROJECT SCHEDULE

Well pad and access road construction (three to four week duration) is planned for late 2014. Drilling (four to eight week duration) is planned to follow Construction.

Construction will be conducted daily between the hours of 7:00 and 19:00, whereas Drilling operations will run continuously, 24 hours per day.

2.4 ENVIRONMENTAL MANAGEMENT SYSTEM

SWN RC has developed an Environmental Management System (EMS) to reduce potential adverse environmental interactions that could arise from Project implementation through careful planning and engineering. The EMS will be comprised of the following components:

- Environmental Protection Plan (EPP); and
- Emergency Response Plan (ERP).

The EPP (provided under separate cover) sets out the environmental protection measures and procedures that will be implemented for the Project by SWN RC. The EPP is the primary document to lay out the plans for implementing mitigation measures to avoid and reduce potential adverse environmental interactions that might otherwise occur from routine Project activities.

The ERP (provided under separate cover) is intended to advise Project personnel on how to implement specific actions to respond to accidents, malfunctions, or unplanned events, as defined therein. The ERP outlines specific responses, actions, duties, responsibilities, and notification requirements for key personnel for unplanned events that could conceivably occur in the course of carrying out activities associated with the Project (Rules for Industry, Section 8.1 and Appendix 12; GNB 2013).

3.0 ENVIRONMENTAL SETTING AND POTENTIAL INTERACTIONS BETWEEN THE PROJECT AND THE ENVIRONMENT

This Section provides background on the physical setting for the Project, followed by operational siting and environmental planning considerations, and a listing of known environmental approvals, permits and authorizations required for the Project to proceed as planned. Following this, potential interactions between the Project and environmental components are identified, including a description of the existing environment and mitigation that is planned to avoid or reduce interactions between the Project and the environment.

3.1 PHYSICAL SETTING

The PDA is located on the south side of Route 11 in Kent County, Eastern New Brunswick (Figure 1.1). The well pad portion of PDA is 1.5 km west of the municipal boundary of the town of Richibucto, 2.4 km south of the rural area of Grand-Aldouane, and 2.4 km to the east of the rural area of Lower Saint-Charles.

The well pad portion of the PDA is located on Crown land and the access roads are primarily located on land managed by NBDTI. The well pad portion of the PDA is located approximately 900 m northeast from the nearest privately owned residence. The access roads (Option 3) are approximately 110 m from the nearest privately owned residence to the south along Saint-Charles Road South.

Kouchibouguac National Park is approximately 3.3 km north of the well pad portion of the PDA and 2.9 km north of the access roads. The Kouchibouguac National Park Sand Islands Important Bird Area is 2.2 km north of the well pad portion of the PDA and approximately 2 km north of the access roads. Candidate Protected Natural Area #98 is 6.4 km to the southwest of the well pad portion of the PDA, and approximately 6 km southwest of the access roads.

The PDA lies on land between Petite Rivière Aldouane and Rivière Saint-Charles, which both flow into the Northwest Branch Richibucto River. The access road Option 3 crosses an unnamed tributary to Rivière Saint-Charles, including a narrow fringing riparian wetland that is not a regulated wetland (as defined in the Rules for Industry; GNB 2013). The PDA is located in a mature softwood and mature mixedwood forested area. Biological features near the PDA are:

- an NBDNR-identified watercourse, Petite Rivière Aldouane, approximately 330 m east of the well pad area and an unnamed tributary to Rivière Saint-Charles which crosses one of the proposed access roads; all of these watercourses flow ultimately into the Richibucto River Estuary (Figure 3.1);
- a riparian wetland associated with Petite Rivière Aldouane is located 300 m from the well pad area; this wetland is a regulated wetland as defined in the Rules for Industry (GNB 2013); and
- a Provincially Significant Wetland at the mouth of the unnamed tributary to Rivière Saint-Charles, approximately 295 m to the north of access road Option 2 (Figure 3.1).



- Project Data**
- Potential Project Development Area (PDA)
 - SWN Seismic Line
- Base Data**
- Secondary Road
 - Resource Road
 - Trail/Abandoned Road
 - Contour (10m)
 - Contour (metres above mean sea level)
 - Property Boundary
 - 25245531 Property Identifier (PID) from SNB

- Environmental Data**
- ✖ Reptile Observation
 - Provincially Significant Wetland
 - Regulated Wetland (as defined in the Rules for Industry (GNB 2013))
 - Field Delineated / Interpreted Wetland Boundary (Preliminary - to be field-verified in growing season)
 - Extent of Wetland Assessment (500 m)
 - Watercourse (NBDNR)
 - Waterbody (NBDNR)
 - Medium/High Potential Archaeological Site
 - Archaeological Site / Portage Route 200m Buffer
 - Municipal Area (1.6 km East)
 - Protected Wellfield (2.2 km East)
 - Peatland (NB Department of Energy and Mines)

- Environmental Data Not Present on Map**
- Deer Wintering Area
 - Protected Watershed
 - First Nations Land
 - Parks and Protected Areas
 - Cemetery
 - Historic Period Archaeological Site
 - Pre-contact Period Archaeological Site
 - ✖ Plane Crash
 - New Brunswick Portage Route
 - Potential Paleo-Indian (11,500 to 9,000 years ago) Archaeological Area
 - ★ Ecologically Significant Area
 - Managed Area

- AC CDC Species Observation**
- ▲ Bird Observation
 - ▲ Fish Observation
 - ▲ Mammal Observation
 - ◆ Vascular Plant Observation
 - ◆ Invertebrate Observation
 - ◆ Nonvascular Plant Observation

ACCDC Species Observations: Locations are within 100m unless otherwise noted: *Location is within 500m-1km **Location is within 5-10km
 Sources: Base Data: NBDNR, SNB, NBENV; ESA, Species Observations, Managed Areas: ACCDC Aerial Imagery: Spatial Energy 2011 Regulated Wetland layer provided by NBENV, obtained from GeoNB in March 2012.
 Potential Archaeological Sites near mapped NBDNR/SNB streams subject to field verification.
 This drawing is the property of Stantec and it shall not be given out, copied or duplicated for the use of another but shall be used only by the recipient for the purpose to which it refers.

Projection:	New Brunswick Double Stereographic
Scale:	1:15,000
Date:	10 Apr 2014
Fig. By:	JAB
Appd. By:	MM

Client:	
Project:	121810275

Environmental Constraints Analysis for Well Pad Placement - Lower Saint-Charles

Fig. No.:	3.1	
-----------	-----	--

Lower Saint-Charles

Photos 1 and 2 show habitat at the well pad portion of the PDA.



Photos 1 and 2: Habitat at the Lower Saint-Charles PDA (February 2014).

3.1.1 Surficial Geology

Based on a digital elevation model obtained from Spatial Energy, the existing elevation ranges between approximately 3 m and 20 m above sea level (asl) within a 1-km radius of the centre point of the PDA. The PDA is located within the Central Lowland, a subdivision of the New Brunswick Lowlands, which is in turn a division of the Maritime Plain of the larger Appalachian Region. The Central Lowland is characterized by broad, flat areas separated by poorly-defined valleys. Surface relief may be as much as 75 m in local areas adjacent to the Southwest Miramichi and Bouctouche Rivers, but overall is much less (Rampton 1984).

Quaternary geology maps indicate that the surficial geology at the PDA consists of a blanket of morainal sediments (*i.e.*, till). Sediments are expected to be 0.5 m to 3.0 m thick, depending on bedrock relief at that particular location. Till consists of a heterogeneous mixture of silt, sand, and gravel (NBDNRE 2002).

3.1.2 Bedrock Geology

The bedrock within the PDA is part of the Pictou Group of the Late Carboniferous Age and consists of primarily sedimentary rocks; red to grey arkosic sandstone, conglomerate and shale. These types of rock are formed in a terrestrial setting and, like all sedimentary rocks, may contain fossils.

Arkosic sandstone is composed of sedimentary rocks with particles derived from weathered silicate particles originating from older rocks or pyroclastic volcanism. Arkosic sandstones are those containing >25% feldspar. Particle size typically ranges between silt-sized particles (75 μ m) and coarse particles (2 mm). Primary mineral types include quartz, feldspar, and clay minerals/fine mica.

Conglomerate is composed of sedimentary rocks with particles derived from weathered silicate particles originating from older rocks or pyroclastic volcanism. Conglomerates contain >30% gravel-sized particles (>2 mm). Particles can be igneous, metamorphic, or sedimentary of origin, and the rock can

be described as either clast-supported or matrix-supported. Clast-supported conglomerates occur when gravel-sized particles are dense enough to form the supporting framework. Matrix-supported conglomerates occur when a fine-grained matrix of silt, clay, and sand bind less frequent gravel-sized particles together.

Shale is composed of siliciclastic sedimentary rocks containing >50% particles with grain sizes <0.062 mm. Silt- and clay-size particles (0.004 mm to 0.062 mm) are the dominant particle size in these rocks. Primary minerals include clay minerals and fine quartz and feldspar. Shale is easily identified by its lamination or fissility, meaning it can be readily split into very fine layers.

3.2 OPERATIONAL SITING AND ENVIRONMENTAL PLANNING CONSIDERATIONS

SWN RC employs a systematic process for selecting potential locations that might be used to develop a hydrocarbon well or well system. This process considers the following, among other factors:

- geology and geophysical survey results;
- environmental constraints; and
- operational feasibility.

The PDA was selected following the collection and analysis of various geological, geochemical, and geophysical data (see Section 2.1.1) as well as an extensive review of available geographic information and databases, and environmental and operational constraints. By reviewing a large area for hydrocarbon potential and constraints prior to this submission, SWN RC was able to select a site for the Project that is considered to have elevated potential for hydrocarbons, while limiting the potential for environmental interactions with the Project and avoiding operationally difficult areas. Section 3.2.1 discusses this site-selection process in more detail.

3.2.1 Identification of Areas with Potential for Hydrocarbons

Because little exploration for hydrocarbons had previously taken place outside of the Moncton Sub-basin, SWN RC completed geophysical surveys over the Licences to Search area in 2010 and 2011, and again in 2013, to help identify areas that have higher potential for containing hydrocarbons. A description of the methods used by SWN RC to date to collect the geophysical and geochemical data is provided in this Section.

- **Gravity and Magnetic Surveys:** Gravity and magnetic surveys involve measuring the gravitational and magnetic fields of the Earth's subsurface. Both these surveys are carried out non-invasively by using specialized remote-sensing equipment on board an airplane or helicopter. Using the results of these surveys, anomalies in the regional geology can be identified and help define the spatial extent of sedimentary basins where hydrocarbons may reside. Gravity and magnetic surveys were completed over the Licences to Search area in 2010.
- **Two-dimensional (2D) Seismic Testing:** Seismic testing is used to map subsurface rock formations and help identify sedimentary basins where hydrocarbons may reside. This testing is accomplished by emitting controlled sources of energy and recording the rebounding seismic waves using geophone

seismometers. Seismic energy is typically emitted using vibroseis trucks along the surface of existing roads, or in some cases using small explosive charges as seismic sources activated in a controlled manner at a depth of 15 m below the surface. This information is subsequently processed and interpreted to present a two-dimensional image of the geology below ground, and it can be used to locate sedimentary basins potentially containing hydrocarbons. Seismic surveys were completed throughout much of the Licences to Search area in 2010, 2011, and 2013.

- **Surface Geochemical Testing:** Surface geochemical testing is used to record trace (measured in parts per billion) amounts of hydrocarbons that naturally diffuse from depth to the Earth's surface over time. This testing helps to indicate if hydrocarbons have formed in rock formations below the surface. Sampling involves making a small (1-cm diameter), shallow (30-cm deep) hole in the ground and inserting a flexible Gore-tex® tube that adsorbs hydrocarbon vapour. The tube is subsequently removed after a few weeks in the ground and analyzed at a laboratory to determine the presence of a wide variety of volatile organic compounds. Confirmation of the presence of hydrocarbons using this method indicates possible areas of hydrocarbon accumulation in the sub-surface of the Earth. Geochemical testing was completed within the Licences to Search area in 2010 and 2011.
- **High-Resolution Aerial Photography and LiDAR:** High resolution aerial photography and LiDAR (Light Detection and Ranging) are used to generate a digital elevation model to better understand current land conditions, especially in terms of updated information on ground cover, geology, topography, access, and accessibility. High-resolution aerial photography provides more current and higher-quality photographs than would otherwise be available, which is particularly helpful in determining current vegetation on the landscape. LiDAR is an optical remote-sensing technology that can measure the distance to, speed of, rotation of, and even chemical composition and concentration of a target. LiDAR technology is used as an exploration tool to better understand geology, and as an elevation model to facilitate a better understanding of topography. The Licence to Search areas were flown-over for updated aerial photography and LiDAR in 2011.
- **Other Methods:** SWN RC also reviewed available geophysical and geological data (e.g., rock cores, well logs, and seismic and geochemical data) historically acquired by government or other resource companies for the purpose of hydrocarbon or other resource exploration throughout the Carboniferous Maritimes Basin. By analyzing these data, SWN RC was able to better interpret the results of their geophysical surveys and calibrate their analysis.

Following a review of all the geological, geophysical, and geochemical data, several potential drilling locations were selected for additional consideration. These potential locations were evaluated based on the following criteria:

- the potential for hydrocarbon-rich formations to be located at a suitable depth (based on seismic and geochemical tests);
- the potential extent or size of the sedimentary basin (based on gravity and magnetic surveys as well as other geological data); and
- operational logistics (e.g., land ownership, access).

The areas having the highest evaluations for hydrocarbon resource potential were identified as potential drilling areas.

3.2.2 Environmental and Operational Planning

After the potential drilling area was identified by SWN RC, based on a review of the resource data, an environmental/operational planning process was implemented to determine the well pad location that would reduce the potential for environmental and operational constraints.

SWN RC set out the following objectives to help guide the process to determine the potential locations for a well.

- Operational Objectives:
 - the well pad portion of the PDA should be approximately 3.5 ha in area to accommodate the construction of a 2 ha well pad and associated drainage and related features;
 - the well pad should be within 300 m of a seismic line for reliance on the seismic data collected that infers the potential for a hydrocarbon resource underground;
 - the well pad should be located 250 m away from residences, 500 m from other sensitive receptors such as schools, nursing homes and hospitals, and 100 m from other permanent buildings; and
 - the well pad should be accessible to an existing roadway and on relatively flat terrain.
- Environmental Objectives:
 - to the extent practical, the well pad should be located to avoid and minimize potential environmental constraints and to reduce potential adverse environmental interactions, in accordance with the Rules for Industry (GNB 2013).

A constraint base map was prepared to show important operational features and where sensitive or protected environmental features may lie in proximity to the PDA. Environmental constraints include features that are protected under federal and provincial legislation and can extend to also include features that have special status conferred by published guidelines or policies (e.g., Ecologically Significant Areas). This constraint map also incorporated information from mapping of known archaeological sites and known First Nation portage routes, and from predictive mapping of potential Paleo-Indian (9,000–11,500 years ago) shoreline areas.

Table 3.1 lists the information that was considered in preparing the base map. Information was obtained from the sources listed, geo-referenced, and then placed on a map in 1:7,500 scale by a Geographic Information System (GIS) specialist. The base map includes symbols used to denote each feature and the latest date of the data/information source.

Table 3.1 Summary of Information Used for Environmental and Operational Constraint Analysis

Environmental and Operational Data/Information	Data/Information Source
Seismic Line Location	SWN RC
Roads (major, secondary, resource roads)	New Brunswick Department of Natural Resources (NBDNR)
Railway	NBDNR Data Set
Underground Pipeline	NBDNR Data Set
NB Power Transmission Line	NBDNR Data Set
Mining Area	Natural Resources Canada
Peatland	New Brunswick Department of Energy and Mines (NBDEM) on GeoNB
Topographic Contours	NBDNR (10 m contours)+ LiDAR (light detection and ranging) data (15 cm resolution)
Aerial photo imagery	NBDNR Data Set or SWN RC (whichever was most current)
Property Boundaries and Parcel Identifiers (PIDs)	Service New Brunswick (SNB)
Location of rare species (species at risk, species of conservation concern)	Atlantic Canada Conservation Data Centre (AC CDC)
Breeding Birds	Maritimes Breeding Bird Atlas (MBBA)
Ecologically Significant Areas (ESAs)	AC CDC/Nature Trust of New Brunswick/La Fondation pour la protection des sites naturels du Nouveau-Brunswick Inc. (NTNB)
Watercourses (mapped)	NBDNR; SNB
Water Body (mapped)	NBDNR
Watershed boundaries (mapped)	National Hydrographic Network
Regulated Wetlands (as defined in the Rules for Industry (GNB 2013))	Service New Brunswick (GeoNB Wetland Map Layer)
Wellfield Protected Areas	NBDELG
Watershed Protected Areas	NBDELG
Wetlands (air photo interpretation)	NBDNR aerial photos (interpreted by a wetland specialist)
Depth to Water Table (<25 cm)	NBDNR
30-m Buffer Around Watercourses and Wetlands	Applied by a GIS Specialist
Recreational Areas	Field Observation
Parks and Protected Areas	SNB
Municipal Boundaries	SNB
Underground Pipelines	NBDEM
First Nation Communities and Reserve Land	Aboriginal Affairs and Northern Development Canada
Land Ownership and Land Use (zoning)	SNB
Access	SNB; NBDNR
Proximity to Existing Infrastructure and buildings	SNB; NBDNR; Owner
Transmission line	NBDEM
Registered Archaeological Sites	Archaeological Services, New Brunswick Department of Tourism, Heritage and Culture
Potential Paleo-indian (9,000–11,500 years ago) Shoreline Areas	Archaeological Services, New Brunswick Department of Tourism, Heritage and Culture
First Nation and Historic Period Portage Route	Archaeological Services, New Brunswick Department of Tourism, Heritage and Culture
High/Medium Potential Archaeological Areas	Archaeological Services, New Brunswick Department of Tourism, Heritage and Culture

Using this base map and aerial photography, a wetland and plant biologist reviewed the information to interpret habitat characteristics of the Site in terms of tree cover, cut stage, potential wetland habitat, and potential un-mapped watercourses. These interpreted boundaries were added to the base map. Using the mapped information, a potential PDA was identified that appeared to meet the operational objectives listed above and avoid environmental constraints shown on the map.

Site visits were conducted by a biologist in February 2014 to review the potential areas, verify what was shown on the map, confirm the locations or boundaries of sensitive and protected environmental features, and identify any additional features or expanded boundaries that should be avoided. Winter surveys were necessary due to the completion of seismic surveys in December 2013. The site visit included the PDA and approximately 100 m around the outside of the PDA. A hand-held GPS (Global Positioning System) unit was used to record the location of protected features, and these data were subsequently uploaded to the base map.

The result of the planning process is to identify a suitable location for the PDA as shown in Figure 3.1 within which the well pad and access roads will be sited and developed, along with drainage features as required. The PDA encompasses approximately twice the area required for development to allow for flexibility to adjust the location of the PDA features once the survey has been conducted to meet operational and environmental objectives.

As explained in Section 3.4, the well pad lies in relatively flat terrain, and is more than 150 m away from the nearest watercourse (Petite Rivière Aldouane) and is more than 30 away from any regulated wetlands as defined in the Rules for Industry (GNB 2013) and field-identified wetlands. The well pad portion of the PDA lies in an area deemed by Archaeological Services, New Brunswick Department of Tourism, Heritage and Culture ("Archaeological Services") to have low archaeological potential, having no known archaeological sites or known First Nation portage routes, and is not situated in areas predicted to be potential locations of Paleo-Indian shorelines. As discussed in Section 3.4.9, one of the access road options (Option 3) crosses a watercourse with an associated area of elevated archaeological potential that will be investigated prior to construction activities in 2014. The PDA is not known to include any known species of conservation concern (SOCC) or species at risk (SAR), although a field survey will be conducted during the growing season and peak breeding bird season as a mitigation measure. The PDA is not within any protected wellfield area, protected watershed area, First Nations reserve lands, established parks, or Ecologically Significant Areas.

3.3 KNOWN APPROVALS, PERMITS OR AUTHORIZATIONS REQUIRED FOR THE PROJECT

The Project as defined is not a Designated Project under the *Regulations Designating Physical Activities*, SOR 2012-147 under the *Canadian Environmental Assessment Act, 2012*. As such, a federal environmental assessment is not required. Because key environmental features (e.g., watercourses and critical habitat under SARA) are also avoided through site selection, there are no federal permits or approvals or other forms of federal authorization that are believed to be required to enable the Project to be carried out.

Similarly, because the Project is located outside of any municipal boundaries, no municipal authorizations are needed.

Those permits, approvals, and authorizations that have been identified as being required in advance of the Project being implemented are listed in Table 3.2.

Table 3.2 Regulatory Permits, Approvals, and Authorizations

Permit Name	Regulatory Recipient	Nature of the Permit
Well Licence	NBDEM	Required under the <i>Oil and Natural Gas Act</i> prior to the drilling of any oil and gas wells.
Crown Licence of Occupation	NBDNR (Crown Lands Branch)	Required as part of Section 26 of the <i>Crown Lands and Forest Act</i> for any work conducted on Crown Land.
Letter of Permission	NBDELG	Required from the Environmental Assessment Section of NBDELG as part of the Phased EIA Process.
Approval to Construct or Operate	NBDELG (Impact Management Branch)	Required under the <i>New Brunswick Water Quality Regulation—Clean Environment Act</i> , Regulation 82-126. Required under <i>New Brunswick Air Quality Regulation—Clean Air Act</i> , Regulation 97-133.
Petroleum Storage Site Approval	NBDELG	Required for petroleum storage facilities 2,000 L or greater.
Petroleum Storage Environmental Approval	NBDELG	Required for petroleum storage facilities 2,000 L or greater.
Ministerial Permit	NBDTI	Section 65(7) of the <i>Highway Act</i> provides for the Minister to issue a permit allow for construction of an entrance way onto a highway for which a control line has been designated.
Special Permit for Truck Traffic on NB Highways	NBDTI	Section 261 (1) of the <i>Motor Vehicle Act</i> requires that any vehicle, with or without load, or any combination of vehicles with or without load, not conforming to the weights and dimensions set out in the <i>New Brunswick Vehicle Dimensions and Mass Regulation—Motor Vehicle Act</i> , Regulation 2001-67 must make application for, and obtain, a special permit in order to be authorized to operate such vehicles on New Brunswick highways.
Land Use Proposal	NAV CANADA	The Land Use Program's assessment process applies to NAV CANADA's interests only, and assesses the effect of a proposed physical structure as it may relate to the Air Navigation Services.
Topsoil Preservation	NBDELG	Required under the <i>New Brunswick General Regulation—Topsoil Preservation Act</i> , Regulation 95-66 for the removal of topsoil if the layer to be removed is greater than 4 cm and the quantity is greater than 5 m ³ (Section 9).
Scientific Collection Permit for Fish	DFO	Required under Section 51 of the <i>General Fisheries Regulations</i> , for the potential removal of fish within the vicinity of the site access road crossing the unnamed tributary to Rivière Saint-Charles.

3.4 POTENTIAL INTERACTIONS BETWEEN THE PROJECT AND THE ENVIRONMENT, AND PLANNED MITIGATION

According to the professional judgment of the Study Team, the valued environmental components (VECs) that may interact with the Project include:

- Atmospheric Environment;
- Aquatic Environment;
- Water Resources;
- Terrestrial Environment;
- Historical and Current Use by First Nations;
- Socio-economic Environment;
- Land Use;
- Visual Environment;
- Heritage Resources; and
- Transportation Network.

The following Sections describe each of these environmental components, the existing (baseline) conditions for each environmental component, as well as the potential interactions with the Project and planned mitigation as part of the Project to reduce potential adverse environmental interactions.

3.4.1 Atmospheric Environment

The Atmospheric Environment is the component of the environment that comprises the layer of air near the earth's surface to a height of approximately 10 km. The Atmospheric Environment is typically characterized by:

- air quality, which is characterized by the chemical and physical properties of the air in the lower atmosphere, including gaseous and particulate air contaminant concentrations in the ambient air;
- greenhouse gas (GHG) releases; and
- sound quality, which is characterized by the type, character, frequency, intensity, and duration of noise (unwanted sound) in the outdoor environment.

3.4.1.1 Existing Conditions

3.4.1.1.1 Air Quality

An extensive air-quality monitoring network for various air contaminants has been operated by the government and industry in New Brunswick for a number of years. The monitoring network was designed by NBDELG primarily to monitor compliance with ambient air-quality standards.

In the establishment of ambient air quality, each air contaminant has been given an Air Quality Index (AQI) level by NBDELG, based on measured concentration and environmental and health effects. The highest index level determined the overall AQI for the area. The levels were defined as good, fair, poor, and very poor. In this system, "good" is defined as concentrations that are below the maximum desirable National Ambient Air Quality Objectives (NAAQO) and "fair" is defined as concentrations that are above the maximum desirable NAAQO but are below the maximum acceptable NAAQO (NBDELG 2012b).

According to the NBDELG report entitled "New Brunswick Air Quality Monitoring Results: 2010" (NBDELG 2012b) and previous annual reports, the existing and historical ambient air quality at Moncton, the closest air quality monitoring location to the PDA, is generally considered good (NBDELG 2012b). In 2009, Moncton had "good" air quality for 99.3% of the year, and "fair" air quality 0.7% of the year (NBDELG 2012b). There were no exceedances of the maximum acceptable NAAQO in Moncton in 2010 for the monitored compounds, which included nitrogen dioxides, carbon monoxide, ozone, and particulates (measured as PM_{2.5}) (NBDELG 2012b).

Given the rural nature of the Project area, it is expected that the ambient air quality in the vicinity of the PDA would be similar to, or better than, that reported above for Moncton. This is inferred as much of the air contaminant emissions in the Moncton area are related to on-road and off-road vehicle use, and lower traffic volumes exist in rural areas of the province. In addition to vehicle emissions, longer-range transport from industrial sources in other parts of Atlantic Canada and the United States likely contributes somewhat to background air quality conditions near the Project.

3.4.1.1.2 Greenhouse Gas Emissions

Greenhouse gases (GHG) of concern generally include carbon dioxide (CO₂), methane (CH₄), and nitrous oxide (N₂O), among others. Provincial GHG emissions in 2010 were 8,227,975 tonnes of carbon dioxide equivalent (CO₂e) (Environment Canada 2010). Fifteen facilities in New Brunswick reported GHG emissions to Environment Canada for 2010. Major GHG emitters in New Brunswick include the Irving Oil Refinery in Saint John (35% of the 2010 provincial emissions), the Belledune Generating Station in Belledune (32%), the Dalhousie Generating Station in Dalhousie (11%), and Bayside Power in Saint John (9.4%).

National GHG emissions in 2010 were 261,868,761 tonnes CO₂e (Environment Canada 2010). New Brunswick's contribution to national GHG emissions is 3.1%. Greenhouse gas emissions globally are estimated to be 33 Gt per year (Climate Analysis Indicator Tool (CAIT) 2012). Canada's contribution to global GHG emissions is 0.79%.

3.4.1.1.3 Sound Quality

The PDA is located in a rural forested area dominated by natural sounds (e.g., wind and bird calls) and sounds associated with vehicular traffic on Route 11, approximately 120 m north of the PDA. There would be occasional noise associated with nearby harvesting of forest resources (e.g., wood cutting), agricultural activity, and recreational activity (e.g., all-terrain vehicle and snowmobile use and hunting).

The nearest potentially human-occupied property is a residential property on Marquant Road, with a boundary approximately 700 m from the well pad portion of the PDA and a building approximately 900 m from the well pad portion of the PDA. The rural areas of Grande-Aldouane and Lower Saint-Charles, which are both approximately 2.4 km, respectively, away from the PDA, are on roads that would be primarily subject to residential and rural vehicle traffic noise, and are generally rural in character due to the low population density (Figure 1.1). From the rural nature of the area and the relatively low level of human activity, sound quality in the area is expected to be generally good, signified by a relatively low noise level.

Information on sound quality is available from the Alberta Energy Regulator (AER), which has collected information at locations in Alberta that are considered similar to the Project. The AER found that background natural sounds in a rural environment were on average 35 decibels (dB_A; as rated on an "A" rated scale) during the night (23:00–07:00) and approximately 10 dB_A higher during the day (up to 45 dB_A) due to increased human and wind activity and animal sounds during the day (ERCB 2007). Professional experience confirms this range, although rare, extremely quiet, still nights may result in minimum levels under 30 dB_A, while natural animal sounds such as from spring peepers can cause local sound levels of over 60 dB_A at night.

In general, potential noise-sensitive receptors include residences, daycares, schools, hospitals, places of worship, nursing homes, and First Nations communities (Health Canada 2010). There are several noise-sensitive receptors within 1,500 m of the Project that meet the Health Canada definition. The closest potentially occupied residential properties to the well pad and three access road options are: 1) on Marquant Road, 900 m to the northeast of the well pad and 815 m to the northeast of access road Option 1; 2) on Saint-Charles Road South, 180 m to the north of access road Option 2; and 3) on Saint-Charles Road South, 110 m south of the access road Option 3. No other noise sensitive receptors are within 1,500 m of the project (Table 3.3).

Table 3.3 Nearest Noise Sensitive Receptors to the Project

Nearest Noise Sensitive Receptor	Name of Institution	Name of Community/Town	Approximate Distance –Direction from Access Road Portions of PDA	Approximate Distance –Direction from Well Pad Portions of PDA
Residence	Private dwelling (PID 25165762).	Aldouane	815 m – northeast of Option 1	900 m – northeast of well pad
Residence	Private dwelling (PID 25019746)	Saint-Charles	180 m – north of Option 2	1,250 m – northwest
Residence	Private dwelling (PID 25423567)	Saint-Charles	110 m – south of Option 3	1,840 m – northwest

3.4.1.2 Project Interactions with the Atmospheric Environment

3.4.1.2.1 Air Quality

Project activities may release air contaminants such as sulphur dioxide (SO₂), nitrogen dioxide (NO₂), carbon monoxide (CO), total hydrocarbons (THC), and particulate matter (PM) to the atmospheric environment. Project-related emissions were estimated based on assumed equipment parameters (e.g., engine horsepower), transportation parameters (e.g., round-trip distances, number of round-trips), soil properties (e.g., moisture), and land area cleared for the PDA. Emission factors from Transport Canada (2012) and US EPA (1995, 1996, 2005, 2006, 2010) were used.

Emissions of air contaminants to the environment generated during Construction will occur primarily from construction equipment associated with the Project (e.g., emissions from combustion of fuel and dust). Earth-moving activities associated with site preparation during Construction may result in particulate emissions during dry periods (dust). Emissions from the transportation of construction equipment and materials (i.e., mobile fuel consumption) to the Site are anticipated to be a minor contributor to construction emissions. Table 3.4 provides an estimate of emissions from construction activities over the entire construction period.

Table 3.4 Air Contaminant Emissions from Construction Activities (3-4 Week Duration)

Activity	Estimated Emissions (tonnes)				
	CO	NO _x	SO ₂	PM	THC
Site preparation equipment	0.2	0.5	0.1	0.03	0.03
Transportation of equipment	0.07	0.06	0.0002	0.001	0.005
Fugitive dust (ground clearing)	--	--	--	22	--
Total From Project	0.2	0.5	0.1	22	0.03
Notes: "--" = Not emitted from the source or not applicable.					
Legend: CO = carbon monoxide. NO _x = nitrogen oxides as nitrogen dioxide. SO ₂ = sulphur dioxide. PM = particulate matter. THC = total hydrocarbons.					

Emissions related to the combustion of fossil fuel from operation of construction equipment associated with the Project are anticipated to be very low (relative to other larger construction sites), intermittent, and of short duration. Particulate matter emissions from construction activities represent approximately 0.1% of the reported annual particulate matter emissions (22,130 tonnes) for New Brunswick from the 2010 National Pollutant Release Inventory (NPR) (Environment Canada 2012). Due to the relatively small amount of heavy equipment required, emissions are not expected to exceed ambient air-quality standards for New Brunswick. Equipment will be maintained in good working order and within manufacturer's specifications.

Emissions generated during Drilling will be from combustion of fossil fuels as well as dust, related to drilling activity, transportation of equipment to and from the Site, equipment moving within the PDA, and the trucking of waste to the waste processing facility, which is assumed for modeling purposes to be 200 km away. Total estimated emissions from drilling activities are provided in Table 3.5.

Table 3.5 Air Contaminant Emissions from Drilling Activities (4-8 Week Duration)

Activity	Estimated Emissions (tonnes)				
	CO	NO _x	SO ₂	PM	THC*
Equipment use	2	9	1	0.3	0.3
Transportation	8 x 10 ⁻²	0.1	4 x 10 ⁻⁴	3 x 10 ⁻³	8 x 10 ⁻³
Dust	--	--	--	10	--
Total From Project	2	9	1	10	0.3

Notes:
 * This only includes THC from fossil fuel combustion. Trace amount of THC from drilling is not included.
 "--" = Not emitted from the source or not applicable.

Legend:
 CO = carbon monoxide. NO_x = nitrogen oxides as nitrogen dioxide. SO₂ = sulphur dioxide.
 PM = particulate matter. THC = total hydrocarbons.

Emissions of combustion gases from the Project are very low in comparison to provincial emissions. Particulate matter emissions from drilling activities represent approximately 0.05% of the reported annual particular matter emissions (22,130 tonnes) for New Brunswick from the 2010 NPRI (Environment Canada 2012). They are not expected to cause exceedances of ambient/transient air quality objectives because of the low magnitude and short duration of activities and the mobile nature of many of the sources. Emissions from equipment will be intermittent and transient, thereby reducing potential adverse environmental interactions at any one location. Dust generated by the movement of vehicles and equipment on the Project access roads has been estimated to be 10 tonnes during Drilling (four to eight week duration). Within the PDA, dust will be managed effectively in dry periods using standard dust-suppression best management practices (e.g., water sprays). With planned mitigation such as the use of dust suppressants (i.e., water), the emission of particulate matter (i.e., dust) during Drilling would be primarily restricted to within 500 m of the PDA.

During dry periods with high winds, dust generated along the Project access roads (Figure 1.1) may be carried distances of up to 1 km. The closest sensitive receptor is an unserviced residence 110 m to the southwest of access road Option 3. Because of the short distance, mitigation measures (such as dust suppression) will be implemented when necessary. In the event of a dust complaint, additional mitigation options (e.g., dust suppression, reduced traffic volumes) would be investigated. Review and consideration would be given to each complaint on a case-by-case basis to resolve the complaint.

Air contaminant emissions from Construction and Drilling are expected to be minor when compared to those from industrial facilities currently operating in the province. The scope and footprint of emission sources required for Project Construction and Drilling is also very small in comparison to many activities routinely conducted in the province without substantive air quality interactions, such as road construction and commercial development. As such, substantive interactions between the Project and air quality are not anticipated.

3.4.1.2.2 Greenhouse Gas Emissions

Emissions of carbon dioxide (CO₂), methane (CH₄), and nitrous oxide (N₂O)—the three main GHGs—may be released to the Atmospheric Environment from Project activities (fuel combustion). A small quantity of methane may also be released from rock formations during Drilling. Total GHG emissions are shown as tonnes of carbon dioxide equivalent (tonnes CO₂e), using 100-year global warming potentials (GWP) defined by the Intergovernmental Panel on Climate Change (IPCC 2007).

Estimated emissions of GHGs from the Construction period are provided in Table 3.6.

Table 3.6 Emissions of Greenhouse Gases from Construction (3-4 Week Duration)

Activity	Estimated Emissions (tonnes)			
	CO ₂	CH ₄	N ₂ O	CO ₂ e
Site preparation equipment	48.6	NQ	NQ	48.6
Transportation of equipment	11.7	0.001	0.001	12.0
Total from Project	60.3	0.001	0.001	60.6
Notes: NQ = Emission factors are not available. Legend: CO ₂ = carbon dioxide. CH ₄ = methane. N ₂ O = nitrous oxide. CO ₂ e = carbon dioxide equivalent.				

As shown in Table 3.6, it is anticipated that there will be nominal GHG emissions from the use of heavy construction equipment (e.g., dump trucks, graders) at the Site and from the transportation of equipment and materials. Greenhouse gas emissions from construction activities represent approximately 7 x 10⁻⁴% of reported annual GHG emissions (8,227,975 tonnes CO₂e) for New Brunswick from the 2010 GHG Reporting Program (Environment Canada 2010).

Greenhouse gas emissions generated during Drilling activities will be related to the combustion of fossil fuel during drilling activity, equipment moving the waste drill cuttings within the PDA, and the trucking of waste to the waste-processing facility. Estimated emissions of GHGs from Drilling are provided in Table 3.7.

Table 3.7 Emissions of Greenhouse Gases from Drilling Activities (4-8 Week Duration)

Activity	Estimated Emissions (tonnes)			
	CO ₂	CH ₄	N ₂ O	CO ₂ e
Equipment use	507	0.02	NQ	507
Transportation	20.0	0.001	0.001	20.3
Gas venting	--	0.16	--	3.26
Total from Project	527	0.18	0.001	531
Notes: "--" = Not emitted from the source or not applicable. NQ = Emission factors are not available. Legend: CO ₂ = carbon dioxide. CH ₄ = methane. N ₂ O = nitrous oxide. CO ₂ e = carbon dioxide equivalent.				

Overall, GHG emissions from Drilling are expected to be approximately 531 tonnes CO₂e. This represents 0.01% of 2010 provincial annual GHG emissions (8,227,975 tonnes CO₂e) and <0.001% of 2010 national annual GHG emissions (261,868,761 tonnes CO₂e) (Environment Canada 2010). Equipment will be maintained in good working order and within manufacturer's specifications to control GHG emissions from the Project to the extent possible.

Fugitive emissions of methane from drilling activities may occur if the well passes through a porous gas deposit. Emissions are not expected to be substantive since the geology of the area is well understood and, based on seismographic surveys, is not known to contain a conventional hydrocarbon reservoir. Any gas present is expected to be constrained within the shale being investigated since shale is characterized by a low permeability. It is possible that some natural gas (primarily methane) could be

released during Drilling, but if this occurs it would be limited to the release of small pockets within the shale. Section 2.2.2.4 describes the operational procedures that will be followed if gas formation is encountered.

Substantive interactions between the Project and air quality in relation to GHG emissions are not anticipated.

3.4.1.2.3 Sound Quality

The interactions of the Project with sound quality are described in more detail than the other components of the Atmospheric Environment because sound quality has been identified by the Regulator as meriting more detailed assessment and management (Rules for Industry, Section 9.5; GNB 2013).

Sound emissions will result from construction and drilling activities involving noise-generating equipment including the use of heavy equipment and generators, as well as the drilling of the wellbore.

During Construction, temporary and reversible changes in sound pressure levels will occur over a three to four week period (see Section 2.3) in the vicinity of the Project due to activities such as earth moving and the operation of heavy equipment associated with site preparation, structure construction, access road construction, and the development of facilities. Typical sound pressure levels of some commonly-used construction equipment are provided in Table 3.8.

Table 3.8 Typical Construction Equipment Sound Pressure Levels

Equipment Powered by Internal Combustion Engines	Sound Pressure Level (dBA at 15 m)
Roller	85
Front Loader	80
Backhoe	80
Excavator	85
Bulldozer	85
Grader	95

Notes:
dBA = Decibels on an "A" weighted scale.

Source: Federal Highway Administration (FHWA) 2006.

Preliminary information indicates that an excavator, grader, bulldozers, rollers, and various trucks will be required for Construction. However, not all equipment will be in operation at the same time. Stantec estimated sound pressure levels assuming the simultaneous operation of a bulldozer and an excavator as a likely scenario and representative of typical expected sound pressure levels during Construction: The area disturbed during Construction is 6.3 to 8.3 ha, depending on the access road options chosen. This area is forested and relatively flat. Given the small size of the disturbed area and the straightforward nature of the construction, the simultaneous operation of two pieces of equipment is expected to represent the average number of equipment operating at the Site at any time. The nearest human-occupied receptor to the well pad is a building located approximately 900 m from the well pad. The nearest human-occupied receptor to access roads is between 110 and 180 m depending on the option for access selected. Table 3.9 provides a breakdown of estimated sound pressure levels due to expected Construction activities.

Table 3.9 Predicted Daytime Sound Pressure Levels from Construction (3-4 Weeks Duration)

Distance from Activity (m)	Daytime Predicted Sound Pressure Level (Leq) (dB _A)* (includes background level)
100	72
250	64
500	58
900	53
1,000	52
1,500	50

Notes:
 * Sound pressure level estimates are for outdoor noise level and do not include the 15-25 dB_A decrease in sound pressure levels (depending on insulation and construction quality) that is typically achieved by the walls of a well-built building (windows closed) (Hoover & Keith Inc. 2005). Daytime background ambient sound level assumed to be 45 dB_A. Estimates based on operation of 1 bulldozer and 1 excavator for 12 hours during daytime hours.
 dB_A= Decibels on an "A" weighted scale.

For the planned level of Construction, sound pressure levels at distances up to 1,500 m from construction activities will increase beyond background (expected to be approximately 45 dB_A as described in Section 3.4.1.1.3). At the property on Marquant Road (900 m from construction), the level of noise should be indistinguishable from other surrounding sounds most of the time and should not be considered intrusive. For reference, 53 dB_A (predicted for construction at 900 m from the Project) is similar to the sound pressure level generated inside the average home from the operation of domestic appliances such as a clothes dryer.

Higher sound pressure levels are anticipated periodically during construction at receptors nearest to the access roads. Based on the typical sound pressure levels provided in Table 3.9, and the heavy machinery assumed to be in use during site preparation, sound levels during the daytime may on occasion reach 70 dB_A during the daytime at the nearest potentially human-occupied property to access road construction. This is expected to be noticeable over background levels, but is not expected to cause substantial annoyance due to the relatively short duration and transient nature of road construction (equipment will be moving along the length of the access road).

Because construction activities will occur during the daytime only (07:00 to 19:00 hours), sound levels during the nighttime will be unchanged from the existing nighttime conditions. Consultation and communication with residences within 1,500 m of construction will be conducted to provide information on the planned activities and identify any potential sensitivities to noise that may need to be considered in construction planning and noise mitigation.

During Drilling, temporary (four to eight week period) and reversible changes in sound pressure levels will also occur. The sound pressure levels of equipment anticipated to be used during Drilling are estimated from theoretical predictions and manufacturer's specifications. The sound pressure level at the nearest receptor to the well pad is estimated based on the expected equipment sound pressure levels, the distance to the receptor, and the assumed sound mitigation measures in place (e.g., engine silencers and equipment enclosures).

This assessment focuses on major continuous noise-generating equipment. The estimated sound pressure levels for selected drilling equipment types are summarized in Table 3.10.

Table 3.10 Drilling Continuous Noise Sources

Item	Equipment Description	Sound Pressure Level* at a Distance of 20 m (dB _A)	Sound Pressure Level Reference	Assumptions
1	Power Generator Package (two 800 kW generators and two CAT3508 diesel engine units, 60% loaded)	76	theoretical prediction (design and operational data)	Enclosed unit with access doors closed
2	Rig Drawworks Engine (one GE 752 series motor, 30% loaded)	62	theoretical prediction (design and operational data)	Enclosed unit
3	Mud Pump Skid (two pumps and two GE 752 Series (1) electric motors, 75% loaded)	60	theoretical prediction (design and operational data)	Enclosed unit with access doors closed
4	House/Trailer Generator (Isuzu 4 cycle generator, 50% loaded)	57	measurements	Enclosed unit
5	Mixing Skid	56	measurements	NA
6	Shaker Skid	62	measurements	NA
7	Idling Heavy Truck	66	measurements	NA

Notes:
 dB_A = Decibels (A-weighted scale).
 * dB reference pressure is 20 µPa (micro Pascals).
 1. Exhaust on all diesel engines are fitted with super-critical grade silencer or higher grade.
 2. Equipment enclosure wall and roof assumed to be 3" thick structure with R12 insulation and 20 ga galvanized outside wall cladding.
 3. Negligible noise breakout from the equipment enclosure skid.
 4. Sound attenuation by ground absorption, barrier effect of terrain and buildings are not included (therefore over-estimated).
 5. Equipment in the table above operates continuously at the specified load capacity. If the load capacity is not specified for the equipment, the assessment assumes 100% during Drilling.

The noise from trucking during Construction and Drilling may reduce the sound quality at residences along the transportation route to the processing site; therefore the route was selected to reduce potential interactions with adjacent residents and communities, to the extent feasible (Figure 1.1).

Noise emissions from temporary or intermittent events (e.g., rig tripping operation, cementing operation, air tugger, logging unit, centrifuges, air compressor, vacuum pump, and front end loaders) are not included in the assessment. These activities will be infrequent and will be planned for daytime only wherever possible.

The noise propagation prediction is based on international standard ISO 9613-2:1996 "Acoustics - Attenuation of Sound during Propagation Outdoors - Part 2: General Method of Calculation" (ISO 1996), a commonly accepted calculation method used by acoustic practitioners and recommended by provincial regulations (i.e., Alberta ERCB Directive 038). Predictions were completed assuming the doors are closed on equipment with access doors. A breakdown of predicted sound pressure level at various distances from the rig drawworks operation is provided in Table 3.11.

Table 3.11 Sound Pressure Levels from Drilling with Doors Closed (4-8 Week Duration)

Distance from Activity (m)	Predicted Sound Pressure Level without background (dBA) ^a	Daytime Cumulative Level With Background (dBA) ^b	Nighttime Cumulative Level With Background (dBA) ^c
50	69	69	69
100	63	63	63
250	54	55	54
500	47	49	48
900	41	46	42
1,000	40	46	41
1,500	35	45	38

Notes:
 dBA = Decibels on an “A” weighted scale.
^a dB reference pressure is 20 µPa (micro Pascals).
^b Daytime ambient sound level of 45 dBA.
^c Nighttime ambient sound level of 35 dBA.
 * Attenuation from intervening structures, forested areas and topography was excluded from the analysis.

As outlined in the Rules for Industry (GNB 2013), the maximum permissible levels of noise during operation of oil and gas facilities are 50 dBA Leq for the daytime period (07:00–19:00) and 40 dBA Leq for the nighttime period (19:00–7:00). These noise levels apply at the external wall of the nearest noise receptor (e.g., a dwelling or other noise sensitive building). If there is no noise receptor within 1,500 metres, the noise levels apply at a distance of 1,500 metres measured from the centre of the noise source (e.g., the centre of a well pad or compressor station). This applies to the operation of permanent facilities where the regulator may allow or require adjustments to the above basic sound levels on the basis of site-specific conditions such as:

- a) duration and nature of the noise-generating activity;
- b) proximity of the noise receptor to other noise-generating activities (e.g., a highway, airport, etc.);
- c) actual ambient noise levels; and
- d) presence of noise-sensitive natural features such as wildlife habitat (GNB 2013).

The ERCB Directive 038 is referenced for guidance on when adjustments may be applied. One such condition where adjustments can be applied per the ERCB directive is in relation to temporary activities, defined as less than 60 days. Where activities are less than 60 days, the ERCB directive indicates that a 5-dBA adjustment can be applied because there may be some additional tolerance of temporary activities. This would result in maximum permissible levels of 55 dBA for daytime and 45 dBA for nighttime.

The predicted daytime sound pressure level at a receptor that is 900 m from the well pad portion of the PDA during continuous drilling operation (based on the equipment in Table 3.9) is 46 dBA, which is likely to be indistinguishable from background sound levels and within the maximum permissible level specified in the Rules for Industry (50 dBA for permanent facilities, 55 dBA for activities less than 60 days) (GNB 2013). Assuming a nighttime background sound pressure level of 35 dBA, the predicted nighttime

cumulative sound pressure level at the nearest receptor at 900 m from the well pad portion of the PDA is 42 dBA. This is within the nighttime maximum permissible level (with an adjustment of 5 dBA applied due to the temporary nature of the activity). Therefore, additional mitigation such as installation of temporary barriers (fencing or tented enclosures with acoustic curtains) are not anticipated to be required to achieve the adjusted nighttime limit (45 dBA).

Detailed designs of the any mitigation measures to be implemented will be finalized once final site equipment is confirmed, and these will be documented in a noise impact assessment and mitigation plan to be included as part of the EPP. As outlined in Section 9.5 of the Rules for Industry (GNB 2013), the noise mitigation and management plan will include plans to monitor noise levels during Drilling. The noise mitigation plan will be submitted to the Regulator for approval prior to commencement of Drilling.

Impulse noise from the operation of the drilling rig (e.g., metal on metal clanging) may occur during Drilling. Although these sound sources are loud, they are intermittent and occur over a relatively short period of time (four to eight weeks). Over the distance to the nearest sensitive receptor (900 m), impulse noise will be attenuated such that it will likely not be distinguishable over normal operational noise or other unrelated noise. Noise mitigation will also consider ways to minimize impact or impulse noise from Drilling.

Table 3.12 summarizes the results at the nearest receptor. Although no maximum permissible noise level is specified for Construction in the Rules for Industry (GNB 2013), the noise during Construction is predicted to be perceptible over background levels but is not expected to be overly intrusive or prolonged at any one receptor. As construction activities will take place during daytime only, adverse environmental interactions due to noise during Construction will not occur during nighttime hours and are not expected to be substantive overall. Communication will be used to reduce the likelihood of annoyance from construction noise and complaint management will be employed through the EPP to manage and mitigate noise issues during Construction if they occur.

Table 3.12 Summary of Noise Prediction Results at 900 m from the Well Pad (At Nearest Receptor)

Phase	Background Day/Night (dBA)	Predicted Daytime Leq (dBA) ¹	Predicted Nighttime Leq (dBA) ^{1,2}	Meets Daytime Maximum Permissible Level	Meets Nighttime Maximum Permissible Level*
Construction	45/35	53 to 70	No change (no construction at night)	NA	NA
Drilling (doors closed)	45/35	46	42	Yes	Yes

Notes:
 NA "Not Applicable": no maximum permissible noise level is specified for Construction in the Rules for Industry (GNB 2013).
 dBA = Decibels on an "A" weighted scale.
¹ dB reference pressure is 20 µPa.
² Construction will not occur at night. Assumed background level presented.
 * Permissible level with 5 dBA adjustment applied for temporary nature of activity.

In the unlikely event of a noise complaint, notice would be given to the Regulator and review and consideration would be given to each complaint on a case by case basis. To resolve the complaint, mitigation options would be investigated.

Based on the results, substantive interactions between the Project and sound quality are not expected. Periodic noise monitoring will be carried out at the nearest receptor during both Construction and Drilling near the onset of the work to confirm compliance with permissible noise levels. In the event that exceedances of the maximum permissible levels are measured, additional mitigation would be employed in accordance with Section 9.5 of the Rules for Industry (GNB 2013). Based on experience, these levels are achievable for this type of operation.

Overall, while Construction and Drilling may result in emissions of air contaminants, GHG, and sound (noise) to the atmosphere, these emissions are expected to be small in magnitude and of short duration, and they are not expected to cause an exceedance of air quality and noise guidelines or result in GHG emissions that are considered important on the provincial, national, or global scale. In light of this, substantive interactions between the Project and Atmospheric Environment are not anticipated.

3.4.2 Aquatic Environment

The Aquatic Environment includes consideration of fish and fish habitat, including aquatic species at risk and species of conservation concern and water quality and habitat quantity in freshwater bodies.

3.4.2.1 Existing Conditions

Existing conditions in the Aquatic Environment in the area of the Project were determined based on a review of available information (e.g., NBDNR and SNB maps), and a site visit. The PDA is located within the Richibucto River Watershed and west of Petite Rivière Aldouane which flows into the Northwest Branch Richibucto River. The Richibucto River Watershed has a total area of approximately 134,741 ha (GNB 2014).

There are two watercourses in the vicinity of the Project (Figure 3.1). Petite Rivière Aldouane originates south of the Project and flows northeast along the eastern side of the well pad and access roads where, at its closest point, it is approximately 330 m from the PDA. The terrain of the PDA and surroundings is low and flat with a gentle slope to the north toward Rivière Saint-Charles.

An unnamed tributary to Rivière Saint-Charles originates south of access road Option 3 and flows northwards where it crosses the access road. This watercourse flows into a long culvert (approximately 100 m) that directs the flow under Route 11. Both watercourses serve as partial drainage for a large peatland complex to the south known as Saint-Charles Plain.

Particular attention must be paid to species at risk (SAR) and species of conservation concern (SOCC), which are specifically protected by federal and provincial legislation. Generally, these laws prohibit the destruction, disturbance or other interference with SAR or their residences. The Federal SARA is co-administered by Environment Canada, Parks Canada, and DFO; and the NB SARA is administered by NBDNR. SOCC are often species on the verge of becoming SAR and are therefore 'listed' in federal and provincial legislation as well as in non-regulatory lists maintained by independent assessment agencies and committees, such as the Atlantic Canada Conservation Data Centre (AC CDC).

The AC CDC has returned two records of aquatic provincial species of conservation concern (SOCC) within 5 km of the well pad and access roads. The AC CDC and NatureServe use data and expertise for

ranking species rarity or conservation status. Provincial rarity rankings range from S1 ("Extremely Rare"), to S5 ("Abundant"). Species occurrences that are individually tracked due to conservation concern in the context of this environmental assessment are those with rankings of S3 ("Uncommon") or rarer (AC CDC 2012). No species at risk (SAR) were recorded. Atlantic Salmon – Gaspé – Southern Gulf of St. Lawrence population (*Salmo salar* pop. 12) is listed as "Special Concern" under COSEWIC and has a provincial rank of S2 ("Rare"). Striped Bass (*Morone saxatilis*), which is listed as "Threatened" under COSEWIC, and has a provincial rank of S2 ("Rare"). Both species are found in the Richibucto River. The American eel is also present within the Richibucto River (Turcotte-Lanteigne and Ferguson 2008), is listed as "Threatened" under COSEWIC, and has a provincial rank of S5 ("Abundant").

3.4.2.2 Project Interactions with the Aquatic Environment

Only access road Option 3 interacts with the Aquatic Environment, with the requirement for a watercourse crossing for the access road if this option is selected. The well pad itself, and access road options 1 and 2, do not interact with the Aquatic Environment. Therefore, the analysis that follows relates to access road Option 3 only, in the event that it is selected for the Project.

Pursuant to Section 5.2, Rules for Industry (GNB 2013) surface water quality and fish habitat quality must be determined at upstream and downstream locations in watercourses within 150 m of the PDA, prior to Construction and Drilling. While the well pad portion of the PDA is more than 300 m from the nearest watercourse, the proposed access road Option 3 crosses an unnamed tributary to Rivière Saint-Charles and will require the construction of a crossing at that location, should that option be selected. If access road Option 3 is selected, a field characterization of fish and fish habitat (including surface water quality sampling) is required for the Project and will be conducted between June 1 and September 30, 2014.

Construction, erosion and sedimentation control methods for the watercourse crossing installation will follow the "Guidelines for Roads and Watercourse Crossings" (NBDNR 2004). A standard culvert watercourse crossing is anticipated to be required and will be subject to approval under the WAWA Regulation. A culvert-type crossing represents a temporary alteration to fish habitat and does not constitute "serious harm to fish that are part of a commercial, recreational or Aboriginal fishery" under Section 35 of the *Fisheries Act*. As such the watercourse crossing will not require an Authorization from Fisheries and Oceans Canada (DFO).

Under the *Clean Water Act*, a permit under the WAWA Regulation (WAWA permit) will be required from NBDELG for the construction of the watercourse crossing, and the conditions of that permit will determine special considerations for the design and construction of the watercourse crossing and required mitigation for environmental effects on the watercourse, fish, and fish habitat. Construction will be done in the dry, with temporary coffer dams restricting water flow through the area, and pumps used to will pump water around the construction area. Plans will be put into place to avoid sediment-related problems by using erosion control measures (e.g., silt barriers, hay bales, erosion control blankets), and preventing deleterious substances from entering the watercourse during crossing construction and post-construction to minimize disturbance to the stream channel, retain existing vegetation, re-vegetate, and stabilize the Site.

Through following these mitigation measures and the conditions of the WAWA permit for the watercourse crossing, no substantive environmental interaction on the Aquatic Environment is anticipated if access road Option 3 is selected as part of the Project.

As for the remainder of the PDA (*i.e.*, the well pad, and access road Options 1 and 2), as described in Section 2.2.1.3, areas of the PDA used for storage and handling of drilling fluids or wastes will be equipped with an impermeable synthetic liner and bermed on the perimeter to allow for containment of spilled fluids for immediate clean up, thereby avoiding the downward migration of associated contaminants. Excess wastewater from drilling operations collected at the PDA that cannot be reused will be trucked to a disposal facility legally able to receive the excess wastewater or tested and treated prior to release to the environment.

Surface water falling on un-lined areas of the well pad will be directed toward perimeter ditching and storm water collection ponds. The storm water ponds will be designed to allow suspended sediments to settle out of the water column prior to release to the environment. Clean surface water run-off originating from off the PDA will be avoided from entering the well pad area by perimeter ditching.

As described in Section 2.2.1.3, a site-specific run-off management plan will be developed for the Project prior to grading with particular focus on areas determined to have high erosion risk. In addition to careful Project design to avoid direct interaction with watercourses, mitigation measures will be used that are protective of the Aquatic Environment, including those listed in Section 2.2.1.3.

Given that the well pad is located at least 150 m from the nearest watercourse, including drainage features, the Project will not release water into a watercourse or within 30 m of a watercourse. As well, given the run-off management as described in Section 2.2.1.3 and mitigation that will be applied in the site-specific run-off management plan, substantive interactions between the Project and the Aquatic Environment are not anticipated.

3.4.3 Water Resources

Water Resources include surface and groundwater sources that can be used as potable water, or for other residential, agricultural, commercial, or industrial purposes.

3.4.3.1 Existing Conditions

An assessment of the existing conditions for Water Resources was conducted using published data on Wellfield and Watershed Protected Areas, municipal, industrial and other large water supplies, and the occurrence of surface water and groundwater in the vicinity of the Project.

The Project is not located within an NBDELG Wellfield Protected Area, nor is it located within an NBDELG Watershed Protected Area. The nearest municipal water supplies are the Town of Richibucto and the Village of Saint-Louis de Kent. Both of these municipalities derive their water supplies from groundwater. A Wellfield Protected Area has been designated for the Town of Richibucto wellfield, and a preliminary Wellfield Protected Area has been delineated for the Village of Saint-Louis de Kent, although it has not yet been designated as a Wellfield Protected Area by the Province. The PDA is located 2.2 km west of the limits of Zone C for the Town of Richibucto's designated wellfield, and 3.9 km southeast of the limits

of Zone C for the Village of Saint-Louis de Kent's delineated wellfield—thus the PDA is well outside of these protected areas.

The *Wellfield Protected Areas Designation Order* enacted under the *Clean Water Act* defines areas around production wells used for regulated water supply systems and restricts the types of activities that can be carried out within the Wellfield Protected Area. Three protection zones established around each protected wellfield that generally encompass the majority of the theoretical groundwater capture area or recharge to a production well or wellfield. The protection zones are based on groundwater travel times between a potential contaminant source and a receptor supply well(s), usually by groundwater modeling or analytical calculations, and are designed to be protective against three types of groundwater contaminants, bacterial, petroleum products and chlorinated solvents.

As the PDA is located outside Zone C of the Wellfield Protected Areas, the Project will not interact with these or any other municipal water supplies.

The nearest industrial water supplies are at the former UPM Kymmene pulp and paper mill (closed; groundwater source) located 60 km northwest of the PDA and at the Cape Bald Packers seafood processing facility located 70 km southeast of the PDA.

A description of the watercourses in the vicinity of the Project is provided in Section 3.4.2. No existing users of the watercourses as a water resource have been identified in the vicinity of the PDA.

The PDA lies in a rural area where potable water is likely obtained from residential wells. Information on potable water supplies in the region surrounding the PDA was conducted by query of the NB Online Well Log System (NBDELG 2014), which contains well records for all potable wells drilled in the province beginning in 1994. The query was conducted for wells located within 500 m of the PDA, and it identified a total of 9 well logs, however, no wells were identified within 500 m of the well pad portion of the PDA. The well logs reported total well depths ranging between 18.3 m and 54.3 m below ground surface. The mean safe yield (pumping rate) of the wells is 194 L/min, which is a suitable amount for domestic potable supplies supporting individual residences. The lithology was reported to be red claystone, brown shale, grey soapstone and red, brown and grey sandstone, which is consistent with the bedrock geology of the area (see Section 3.1.3).

In accordance with Section 5.1 of the Rules for Industry (GNB 2013), potable water well sampling and analysis must be conducted on water wells located within 500 m of the well pad, prior to and after drilling (GNB 2013), to document potable water well quality prior to Construction and Drilling. However, as no potable wells are located within 500 m of the well pad portion of the PDA, no potable water well sampling required for the Project.

3.4.3.2 Project Interactions with Water Resources

In total, it is expected that the Project will require approximately 1,200–1,600 m³ of water, which includes process water and potable water for use by employees at the Site. Process water will be re-used to the extent possible. Process water that cannot be re-used and sanitary waste water will be trucked off-site to a disposal facility.

The water requirements of the Project will be supplied by a municipal source, industrial water supply, or be withdrawn from nearby surface water. If water is withdrawn from nearby surface water, SWN RC will do so at a rate that is less than 50 m³/day and at a rate and in a manner such that it does not have a substantive environmental effect on the Aquatic Environment (*i.e.*, maintenance flows are observed). A terrestrial and aquatic biologist will survey conditions at the withdrawal point and a WAWA permit will be obtained under the *WAWA Regulation*. SWN RC will comply with all conditions of the WAWA permit.

Stormwater run-off from the bermed well pad area will also be collected for use by the Project (Section 2.2.1.3). The Project will not release water directly into watercourses or local groundwater. As described in Section 2.2.1.3, areas of the PDA used for storage and handling of drilling fluids or wastes will be equipped with an impermeable synthetic liner and be contained on the perimeter by berms. Stormwater or other fluid that accumulates within the containment berms will be collected and trucked to a disposal facility, treated on-site, or be tested prior to being released to the environment. Furthermore, mitigation as listed in Section 2.0 of the Rules for Industry, entitled "Preventing Potential Contaminants from Escaping the Wellbore" (GNB 2013), will be implemented during drilling. Because of the mitigation to be implemented, no release of contaminants from the wellbore or well pad is expected.

Given the run-off management as described in Section 2.2.1.3 and mitigation that will be applied in the site-specific run-off management plan, substantive interactions between the Project and Water Resources are not anticipated.

3.4.4 Terrestrial Environment

The Terrestrial Environment includes vegetation, wetlands, wildlife, and wildlife habitat, including terrestrial species of conservation concern (SOCC) and species at risk (SAR) as defined in Section 3.4.2.1.

3.4.4.1 Existing Conditions

A field site visit of the PDA was conducted in February 2014 to characterize the terrestrial environment within the limitations of the presence of snow cover and the absence of seasonally-present animals. Winter surveys were necessary due to the completion of seismic surveys in December 2013. Follow-up field visits will be conducted within the 2014 growing season for vegetation and peak breeding bird season.

The general composition of the vegetation communities was evident from woody vegetation and general site characteristics, and the potential for plant and wildlife SOCC and SAR was estimated from visual observation and background information, including known records of species from the AC CDC.

While the existing conditions for the Terrestrial Environment have been characterized with a high degree of confidence based on available data and site visits, follow-up field visits in 2014 will be conducted to:

- determine the presence or absence of any plant or animal SOCC or SAR;
- verify the location of wetlands and watercourses; and
- determine the distribution and abundance of breeding birds.

3.4.4.1.1 Wetlands

No wetlands (neither regulated wetlands, as defined in the Rules for Industry (GNB 2013), nor field-identified wetlands) were identified within 30 m of the well pad portion of the PDA. Wetlands near the PDA were interpreted and field-checked by Stantec biologists. Wetland boundary interpretation was conducted using aerial photography, a bare earth hillshade model (derived from LiDAR data), and depth-to-water-table map information available from NBDNR (Figure 3.1). Wetland boundaries will be confirmed during the growing season of 2014.

Forested wetlands and commercially harvested peatlands are abundant in the region to the south of the PDA in an area known as Saint-Charles Plain. The PDA is surrounded by mixedwood and softwood dominated upland habitat but there are some shrub dominated riparian wetlands along the watercourses in the area and some small mixedwood forested wetlands to the south of the PDA. The wetland along the Petite Rivière Aldouane, approximately 300 m east of the well pad is a regulated wetland as defined in the Rules for Industry (GNB 2013).

There is a narrow field-identified wetland along the unnamed tributary to the Rivière Saint-Charles that would be crossed by the access road Option 3 (if selected). This wetland is not a regulated wetland as defined in the Rules for Industry (GNB 2013) but will be addressed in the WAWA permitting process for the watercourse crossing so as to reduce the potential for an adverse interaction. This field-identified wetland is dominated by speckled alder and appears to be subjected to periodic inundation resulting from beaver interference with flow through the culvert under Route 11. There is some groundwater influence from the surrounding embankments. Woody vegetation in this wetland is typical of the region and does not indicate an exceptionally rich or diverse habitat. This combined with the unstable hydrology of the wetland suggests that the potential for rare plants is low to moderate, at most. The potential for rare plants will be confirmed during the growing season of 2014.

A Provincially Significant Wetland associated with the unnamed tributary to Rivière Saint-Charles is approximately 295 m to the north of the access road options and on the other side of Highway 11 (Figure 3.1). The large wetland complex that is part of the Saint-Charles Plains peatland lies at least 300 m to the south of the PDA.

3.4.4.1.2 Vegetation

The PDA is located in the Kouchibouguac Ecodistrict within the Eastern Lowlands Ecoregion (NBDNR 2007). This Ecodistrict is characterized by a low, flat area along the eastern coastline of New Brunswick that drains eastward into the Northumberland Strait. The landscape is dominated by river estuaries, dunes, and peat bogs. The predominantly intolerant mixedwood and softwood forest cover and abundance of wetlands due to poorly-drained soils and low relief are typical to the Ecodistrict and Ecoregion. The soils are typically nutrient poor in this area and the vegetation community reflects the level of productivity and poor drainage. The watercourses near the PDA drain into river estuaries that lie to the north and east.

The PDA is covered with stands of young to mature mixed wood and softwood forest, dominated by red spruce (*Picea rubens*), balsam fir (*Abies balsamea*), red maple (*Acer rubrum*), white birch (*Betula papyrifera*), trembling aspen (*Populus tremuloides*), and grey birch (*Betula populifolia*). In the wet

forested areas outside the PDA there is either a closed canopy of balsam fir and black spruce (*Picea mariana*) with very little undergrowth, or a red maple dominated forest canopy with some balsam fir and eastern white cedar (*Thuja occidentalis*). In the red maple dominated forested wetlands, there is a well-developed understory of mountain holly (*Ilex mucronata*) and winterberry (*Ilex verticillata*).

The unmapped riparian wetland that is crossed by the westernmost access road option is dominated by speckled alder and bluejoint reedgrass (*Calamagrostis canadensis*). Potential for rare plants in this wetland and the upland habitat was estimated to be low to moderate, based on the visible woody vegetation cover. While there are a variety of AC CDC records of plant SOCC within 5 km the records are all associated with either the bog habitat in Saint-Charles Plains to the south, or with salt marsh habitat on the brackish estuaries to the north. These habitat types are not present within the PDA and the vegetation communities present are very typical to the Ecodistrict.

A follow-up site visit will be conducted in the field season to confirm the absence of plant SOCC.

3.4.4.1.3 Wildlife and Wildlife Habitat.

According to the AC CDC and Maritime Breeding Bird Atlas (MBBA), there are six records of terrestrial animal SOCC or SAR within a 5-km radius of the PDA. Of these, one species, the olive-sided flycatcher (*Contopus cooperi*), is listed federally as "Threatened" under the Schedule A of the *Species at Risk Act*. The other five species records are for the common tern (*Sterna hirundo*, S3B, "Sensitive"), barn swallow (*Hirundo rustica*, S3B Sensitive), killdeer (*Charadrius vociferous*, S3B, "Sensitive"), northern pintail (*Anas acuta*, S3B "Sensitive"), and bank swallow (*Riparia riparia*, S3B "Sensitive"). Suitable habitat for most of these species is common in the surrounding region but is not present within the PDA. However, some of the forested wetlands outside the PDA and the riparian wetland along the unnamed tributary to the Rivière Saint-Charles that is crossed by access road Option 3 (if selected) have well-developed shrub understories that could potentially support Canada warbler (*Cardellina canadensis*, S3S4, "At Risk"), which typically uses swampy habitats with well-developed shrub understories for nesting and foraging. These habitat conditions are common on the surrounding landscape but do not exist within the PDA. These nearby forested wetlands also have minor potential to support olive-sided flycatchers which are often associated with coniferous forested edges of wet areas or other openings.

While common bird species would be expected to nest in the vicinity of the Project, there is no unique or critical habitat for bird SAR within the PDA. While there are no avian SOCC anticipated within the PDA, a follow-up field survey within the breeding season will be conducted to assess actual use of the area by birds.

Typical assemblages of wildlife are anticipated to be present near the PDA, including moose (*Alces alces*), white-tailed deer (*Odocoileus virginianus*), American black bear (*Ursus americanus*), fox (*Vulpes vulpes*), American mink (*Mustela vison*), beaver (*Castor canadensis*), striped skunk (*Mephitis mephitis*), porcupine (*Erethizon dorsatum*), raccoon (*Procyon lotor*), and varying hare (*Lepus americanus*). Small mammals such as red squirrel (*Tamiasciurus hudsonicus*), small insectivores and rodents are anticipated to be widespread in or near the PDA. During the site visit, coyote tracks and a deer carcass were encountered. The mammal species that are likely to be present are common and relatively abundant throughout New Brunswick, with the possible exception of the Maritime shrew, which has been recorded in the area and is listed as uncommon by the AC CDC (S3 "Secure") but is not a SOCC. The location

near Route 11 may limit the suitability of this habitat for some animals averse to noise and human activity.

No Ecologically Sensitive Areas (ESAs), as defined by Nature Trust of New Brunswick in partnership with NBENV and NBDNR (Nature Trust of New Brunswick 2012), are located within 5 km of the PDA. York Point Island ESA is located 5.1 km to the east of the pad. There is a Deer Wintering Area (DWA) (167 ha) approximately 9.2 km to the southeast of the well pad. No other locations of critical or sensitive habitat for wildlife are known within the PDA. Kouchibouguac National Park is approximately 3.3 km north of the well pad portion of the PDA and 2.9 km north of the access road options. The Kouchibouguac National Park Sand Islands Important Bird Area is 2.2 km north of the well pad portion of the PDA and 2 km north of the access roads. Candidate Protected Natural Area #98 is 6.4 km to the southwest of the well pad portion of the PDA, and 5.8 km southwest of the access roads.

3.4.4.2 Project Interactions with the Terrestrial Environment

3.4.4.2.1 Wetlands

There are no regulated wetlands (as defined in the Rules for Industry; GNB 2013) within the PDA or within 30 m of the PDA, directly as a result of avoidance of wetlands and wetland buffers by SWN RC in selecting this PDA. One small field-identified wetland lies along the unnamed tributary to the Rivière Saint-Charles that will need to be crossed by the westernmost access road option, if selected. This wetland will be considered in the WAWA permitting process and the crossing will be designed and constructed to avoid and reduce potential adverse interactions associated with the Project.

No Project-related activities will occur within the boundaries of, or within 30 m of, a regulated wetland as defined in the Rules for Industry (GNB 2013). The Project will affect a small area of field-identified wetland but will not compromise function of that wetland. As such, interactions between the Project and wetland function are not anticipated.

3.4.4.2.2 Vegetation

No plant SOCC or SAR or associated habitat have been found within the PDA or its vicinity. The Project will necessarily result in the loss of abundant vegetation in the PDA; however, plant species communities evident during the site visit are common to the Ecodistrict and the potential for plant SOCC is estimated to be low, or possibly moderate. As such, substantive interactions between the Project and vegetation are not anticipated and this will be confirmed during a follow-up site visit within the growing season of 2014.

3.4.4.2.3 Wildlife and Wildlife Habitat

The potential for SAR or SOCC to be present within the PDA is generally low. The vicinity of the PDA does not contain any important or specialized habitat, and is typical of eastern New Brunswick. No wildlife SOCC or SAR have been observed within or adjacent to the PDA.

Clearing/grubbing activities will be avoided to the extent feasible during the peak bird breeding periods, and mitigation will be undertaken during clearing to reduce the risk of nest destruction or disturbance to breeding birds. A bird biologist will complete a walkover at the PDA prior to clearing/grubbing on-site and will consider any additional mitigation if necessary.

Light sources, especially at night and/or during inclement weather have been shown to be an attractant to migrating birds (Avery *et al.* 1976, Evans Ogden 1996, Wiese *et al.* 2001, Rich and Longcore 2006). The attraction of birds to lights on elevated structures and towers and/or flares raises the issue of the increased potential for bird kills due to collisions. With planned mitigation and the short duration of the Project, negative effects caused by lighting are not anticipated (for additional detail on lighting assessment please see Visual Environment, Section 3.4.8). Furthermore, Construction and Drilling activities are planned, where possible, to take place outside of peak breeding bird season (May 1 through August 31), and careful Project planning and siting activities (Section 3.2) have aimed to avoid important bird habitat and areas that rare or protected bird species are known to inhabit, thus further reducing the potential for attracting nocturnal migrating birds.

Since the PDA does not represent specialized or unique wildlife habitat, the habitat within and around the PDA is typical of this area of New Brunswick, and mitigation measures are in place to protect breeding birds, substantive interactions between the Project and wildlife and wildlife habitat are not anticipated.

3.4.5 Historical and Current Use by First Nations

SWN RC has been directly engaging First Nations in relation to its exploration activities, which includes exploratory drilling as intended by the Project. The following is a summary of Historical and Current Use by First Nations as communicated to SWN RC by First Nations in such engagement activities as well as from research and literature.

3.4.5.1 Existing Conditions

There are many areas in New Brunswick which have historical and cultural significance to First Nations. These areas include locations where First Nations continue to exercise Aboriginal rights. Aboriginal rights are those rights held by Aboriginal peoples that relate to activities that are an element of a practice, custom, or tradition integral to the distinctive culture of the Aboriginal group claiming such rights and that have not otherwise been extinguished. Aboriginal rights fall along a spectrum with respect to their degree of connection with the land.

First Nations continue to exercise Aboriginal rights in New Brunswick in locations referred to as traditional territories of certain First Nation communities. SWN RC acknowledges that these traditional territories extend beyond the boundaries of the reserve lands that have been surveyed and set apart by the Crown for the use and benefit of a First Nation community.

The PDA is thought to be located in the traditional territory of the Mi'kmaq First Nations peoples. Pursuant to the environmental and site selection processes as described in Section 3.2.2, our research has not disclosed that there are known archaeological sites or known First Nation portage routes in the PDA or that the PDA is located in an area predicted to be a Paleo-Indian shoreline.

3.4.5.2 Project Interactions with Historical and Current Use by First Nations

As further described in Section 4.0, SWN RC has been directly engaging with First Nations on all exploration activities it has completed since being awarded its Licences to Search. SWN RC's internal mandate is to continue to communicate Project information to First Nations by various means and facilitate First Nations' comments, questions and participation so that concerns are documented and addressed.

The exact scope and detail of First Nation engagement has yet to be determined and the Province has not yet determined what, if any, consultation obligations may be delegated to SWN RC with respect to the Project. It is anticipated, based on experiences with First Nations and Crown direction relating to previous exploration work completed by SWN RC, that SWN RC's engagement and delegated consultation with First Nations may involve First Nation evaluation and monitoring of the Site to identify historical use and/or current use of the Site by First Nations in exercising Aboriginal rights.

The information gathered from engaging First Nations will be used by SWN RC to prepare protocols for guiding the avoidance, minimization and mitigation of any interaction with features of historical and cultural significance to First Nations and/or current use of the Site by First Nations for exercising Aboriginal rights. If such interactions exist, SWN RC intends to work with First Nations to develop strategies to avoid, reduce or compensate/accommodate possible interactions.


3.4.6 Socio-Economic Environment

The Socio-economic Environment is characterized by a combination of social and economic factors, including population demographics and working conditions.

3.4.6.1 Existing Conditions

The Project is located in the Parish of Saint-Charles, Kent County, approximately 1,500 m east of the Town of Richibucto. The 2011 Census reported a population of Saint-Charles Parish of 1,982, with 1,052 private dwellings (Statistics Canada 2012). Comparatively, the population of New Brunswick as a whole was reported to be 751,171 (Statistics Canada 2012).

The age distribution by sex of the 2011 Saint-Charles Parish is shown in Figure 3.2.

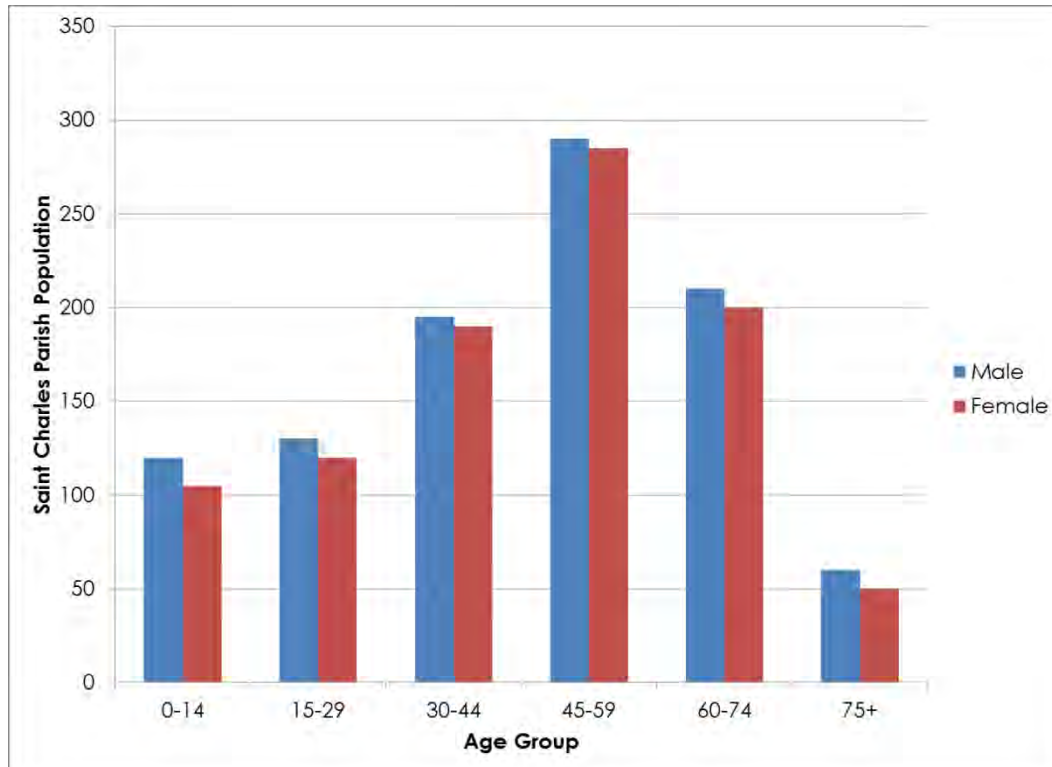

Source: Statistics Canada (2012).

Figure 3.2 Population by Sex and Age Group, Saint-Charles Parish, 2011

The New Brunswick economy has traditionally been based on natural resource development, and it centres on its energy, natural resources and manufacturing industries. Tourism and communication technology industries also make substantial contributions to the provincial economy. Although forests occupy 85 percent of the province’s land (equivalent to 6.1 million hectares) and have been an economic mainstay throughout its history, the forestry sector has become less of an economic driver within the province due to a decreasing contribution to employment from this sector. This decline has occurred over the past decade with the closure of several lumber and pulp and paper mills throughout the province.

Saint-Charles Parish is primarily a rural area with some residential areas. The main industries that employ the labour force in the Parish of Saint-Charles are manufacturing, other services, business services, retail trade, and health care and social services (Statistics Canada 2007). Approximately 14.4% of the total labour force within Saint-Charles Parish was unemployed in 2006, compared to approximately 10% unemployment within the provincial labour force (Statistics Canada 2007).

The Project is not located within an incorporated municipality. A variety of medical, educational, and social services and programs are based in Richibucto. Given the Project’s proximity to Richibucto, area residents generally access community services and infrastructure there.

3.4.6.1 Project Interactions with the Socio-Economic Environment

As described in Section 1, the development of a single well pad costs between \$4 and \$6 million, with a portion of this investment flowing into local economies through wages, equipment rentals, and purchases. Distribution to local economies is typically via the workers employed while undertaking the activities associated with well pad development and drilling, as well as equipment and consumable purchases. This will contribute to economic development in the local area and the province during the Construction and Drilling of the Project.

The Project will require a variety of specialized and non-specialized workers. It is anticipated that some of the specialized workers (e.g., drillers and mud engineers) will be brought to the Site on contract from elsewhere. These workers will contribute to the local economy while working on the Project by renting temporary accommodations and purchasing meals and other items locally. To further maximize economic benefits to local residents, SWN RC will hire local workers whenever feasible. It is anticipated that approximately half of the on-site workers and all truck drivers and operators will be hired from the local community. As such, it is expected that the Project will result in positive economic interactions with the local and provincial economy.

The number of Project workers will vary as the Project progresses depending on the activity being carried out. It is expected that the Project will result in an approximate average workforce of 8–15 workers. SWN RC will make every effort to employ members of the First Nations in the completion of the Project. The development and implementation of the processes discussed in Section 3.4.5 will create several indirect opportunities for First Nations. Since the Project will be carried out over a relatively short period of time (*i.e.*, approximately two to three months), and employ a fairly small workforce, most of whom are expected to be hired locally, it is not anticipated that the Project will result in a noticeable change in the demands on community services and infrastructure.

Substantive adverse interactions between the Project and the socio-economic environment are not anticipated.

3.4.7 Land Use

Land Use is considered in the context of the potential Project interactions with current uses of land in the immediate vicinity of the Project. See Section 3.4.5 for discussion of current and historical use of land by First Nations people.

3.4.7.1 Existing Conditions

As described in Section 3.1, the PDA is 1.5 km from the Town of Richibucto to the east, within 2.4 km of the rural area of Grand Aldouane to the north, and 2.4 km from Lower Saint-Charles to the west. Land use planning services for the area are provided by the Regional Service Commission – Region 6. The PDA is within the Saint-Charles (Sud-Kent Lake) Local Service District.

The PDA is covered with stands of young to mature mixedwood and softwood forest. The PDA contains one surface water feature (unnamed tributary to Rivière Saint-Charles) which crosses access road Option 3 (if selected). Access to the PDA will be via the existing roads Route 11 or Saint-Charles Road South, which are both commonly used by industrial truck traffic.

The well pad portion of the PDA is located on Crown Land. The access roads are mostly located on land managed by NBDTI. The PDA is located in a forested area that is situated near several rural residential areas that are intermixed with land used for agriculture and forestry. NBDNR land-use mapping indicates that private land in the area consists mainly of forested land, with rural residential being concentrated around roadways. There are also some commercial, institutional, agricultural and recreational properties in the area. Peat is mined in the general area and the closest peat mining activity is located approximately 2.8 km to the south of the PDA. The nearest cranberry operation (Canneberges Saint-Charles) is approximately 3 km to the southwest of the Project.

There is a block of Crown Land that extends south of the Site for several kilometres. The PDA is located within the Fundy Crown Timber Licence (licence 7), which is managed by Irving Pulp and Paper, Limited.

Due to the substantial amount of forested land in the surrounding area (both private and Crown), land use activities near to the Project include industrial forestry operations, in addition to peat mining operations to the south. There is some recreational land-use in the area, with three campgrounds within a 5 km radius of the PDA: one 3.6 km to the southeast; a vacant campground 3.6 km to the southwest, and the Kouchibouguac National Park 3.3 km to the northeast. There are some marked trails in the area allowing for hiking, biking, snowmobiling, all-terrain vehicle use, cross country skiing. This recreational activity as well as recreational hunting and fishing is also believed to occur on nearby forested lands and resource roads. When on Crown land these activities are all carried out at the convenience of the Crown. The Richibucto River is located approximately 4.8 km southeast of the PDA and is known to support a variety of commercial and recreational outdoor activities (e.g., power boating, fishing, tubing, canoeing) as well as an assemblage of cottages and seasonal camps.

3.4.7.2 Project Interactions with Land Use

The PDA is located within a block Crown land that is subject to industrial forestry activities, and very near to a major transportation route (Route 11) that is subject to heavy truck traffic. Project activities will be short in duration (approximately 60 days) and will disturb a small area of land (6.3–8.3 ha, depending on the selection of access road options). No sensitive or unique land uses have been identified within or near to the PDA. Because the PDA is situated in an area of forested Crown land, forestry and recreational activities will continue in other areas, uninterrupted by the Project. Following eventual completion of the Project, the well will be permanently plugged and the PDA will be decommissioned and restored (Section 2.2.4).

Prior to initiating construction and drilling activities, SWN RC will engage neighbouring land users to inform them of their plans. The Crown Lands Branch of NBDNR will also be in contact with the Crown Timber Licence holder prior to issuing a Crown Lease to SWN RC to explore within the Crown Timber Licence. By issuing a lease, the Province of New Brunswick will officially designate the PDA for the proposed activities associated with the Project. As well, with a Licence of Occupation to be provided for the PDA by NBDNR to authorize the carrying out of Project-related activities on this parcel of Crown land, the use of the PDA will be determined by NBDNR to be compatible with adjacent land uses.

Project interactions with the Atmospheric Environment are considered in Section 3.4.1, in which possible interactions with nearby receptors associated with air quality and sound are additional. Similarly, Project

interactions with the transportation network are considered in Section 3.4.10, where possible effects of increased truck traffic on nearby land use is assessed.

Overall, the use of land for the Project is considered to be compatible with neighbouring land uses. Therefore, substantive interactions between the Project and Land Use are not anticipated.

3.4.8 Visual Environment

The Visual Environment includes the landscape that surrounds the PDA and the visual aesthetics of the Project within the landscape. The Visual Environment is being considered due to its social and economic importance.

3.4.8.1 Existing Conditions

When assessing the visual environment, the first consideration is how the Project could potentially change, obstruct, or otherwise interfere with the existing view. The most critical natural barrier is the topography of the land, which can provide an initial indication of the Project viewshed. A viewshed determines the potential visibility of a feature through the comparison of altitude angles between any surface location in the surrounding landscape and the maximum height of a feature, considering any intervening terrain that may obstruct the view.

The PDA is located approximately 1,500 m from Town of Richibucto to the east. The PDA rests on the west side of Route 11 and to the south of Saint-Charles Road South, approximately 2.4 km to the south of Grande-Aldouane (Figure 3.1). The light quality within the surrounding area is typical of a rural environment with dusk-to-dawn lighting at many of the properties on Route 11 and Saint-Charles Road South.

As described in Section 3.1, the well pad portion of the PDA is located within a forested parcel of Crown land and the access roads primarily located on land managed by NBDTI. The topography within 1,000 m of the centre point of the PDA ranges from between 3 m and 20 m asl based on the digital elevation model; whereas the PDA lies approximate at an elevation of 13 m asl (Figure 3.1).

Within the vicinity of the PDA there are several rural residential areas that are intermixed with land used for agriculture, forestry, commercial purposes, and peat mining. The closest residence to the well pad is approximately 900 m to the north on Marquant Road. The closest residential property boundary is 170 m west of the well pad on Saint-Charles Road South, although the property is unserviced and contains no structures. Saint-Charles Road South, Route 11 and Route 134 are located down gradient of the PDA at an approximate elevation of between 5-10 m asl (Figure 3.1). Grande-Aldouane and Lower Saint-Charles are down-gradient of the PDA along Rivière Saint-Charles.

The closest public highways to the PDA are Route 11, a two-lane paved highway (not divided) that connects Shediac to Miramichi, and Route 134, a two-lane paved road (not divided) east of Route 11 that joins Moncton to Shediac and joins Route 11 near Kouchibouguac.

As discussed in Section 3.4.7 (Land Use), there are permanent public recreational facilities within a 5 km radius of the PDA, including facilities such as parks (i.e., Kouchibouguac National Park), campgrounds,

and tourism-related facilities. Recreational activities, such as hunting, fishing, snowmobiling, and ATVing are likely to take place within a 5-km radius of the PDA and within the larger Crown land block south of the PDA.

The Richibucto River is located approximately 1,800 m northeast of the PDA and is known to support a variety of commercial and recreational outdoor activities (e.g., fishing, tubing, canoeing) as well as an assemblage of cottages and seasonal camps.

3.4.8.2 Project Interactions with the Visual Environment

As described in the Project Description (Section 2.0), the Project as currently conceived includes a number of infrastructure components, each with distinct characteristics for which assumptions have been made based on available information on the PDA (i.e., forest cover, land use and development in the area), typical configuration, and layout of the various Project components within the PDA (Figure 2.2).

3.4.8.2.1 Viewshed

Viewsheds are identified to review potential adverse environmental interactions between the Project and the Visual Environment. The primary consideration in identifying viewsheds is the presence of natural barriers to sight, the most important of which is often the physical topography of the land. Topography provides an initial indication of the potential Project viewsheds, leading to the identification of visual viewpoints for the analysis.

A viewshed analysis is conducted to determine if the highest point of the Project will be visible from various vantage points within the general vicinity of the Project, which for lack of defined guidance is taken to be within a 2.5 km radius. Viewshed modeling was conducted based on regional topography and assumed a 9 m high tree cover in the forested areas. Areas from which the highest feature of the Project (the drilling rig) are visible are identified; other features or components of the Project may or may not be visible from these areas, depending on the height of the surrounding forest cover and/or topographical features surrounding the Project location.

The results of the viewshed modeling are shown in Figure 3.3. The total amount of land considered residential, recreational, agricultural, or institutional land uses within 2.5 km with a potential view of the highest component of the Project (i.e., the drilling rig) is estimated to be about 860 ha, or 40% of the land. This model has assumed that other components of the Project with lesser height are unlikely to be visible from areas with existing forest cover. Overall, the drilling rig is expected to be potentially visible from the residential properties on Saint-Charles Road South, De La Petite Rivière Road, Chevarie Road, Albé Road and along some sections of Route 11 and Route 134.

The remainder of the facilities on the well pad which are not as high as the drilling rig (e.g., office buildings, auxiliary equipment, and storage and handling facilities) are not expected to be visible because the existing forest cover will shield the view of the Project from the surrounding properties.

The upper derrick of the drilling rig may be visible above the existing forest cover to some residential, recreational, agricultural areas within 2.5 km of the Project. Given the operational and environmental

siting considerations used in placement of the Project within a mainly rural area away from a crestline or ridgeline, the short-term duration of the Project (approximately two to three months), the narrow profile of the derrick (*i.e.*, typically less than 5 m in diameter), the potential for the Project to obstruct key views for an extended period of time is considered to be unlikely, despite its highest component being largely visible from several vantage points.

3.4.8.2.2 Lighting


Sufficient lighting will be required to support Construction and Drilling and as a security measure for the Project. Lighting requirements for the well pad will be determined following final selection of the drilling rig and during detailed design of the well pad and associated facilities. Selection of lighting solutions for the PDA will consider the surrounding environment, proximity to existing development (*e.g.*, rural, urban, industrial surroundings) and the safety of the employees on the Project Site.

Floodlighting, spot lights and emergency lighting will be installed throughout the well pad to illuminate the PDA and facilitate the safe movement of personnel and vehicles within the well pad. Minimum levels of lighting at any task position will be in accordance with Section 6.11 of the *Canada Occupational Health and Safety Regulations*. Lighting will be continuously on through periods of active Construction, and will remain on 24 hours a day, 7 days a week during Drilling. Additional lighting will also be placed on the drilling rig derrick in accordance with Standard 621 – Obstruction Marking and Lighting (Transport Canada 2011) and in configurations that provide for the safe air navigation in order to make them conspicuous to pilots during night time.

Mitigation for obtrusive light (ILP 2011) will include the following: selecting the proper lighting solution for the task, directing light downwards to avoid spill lighting, and including proper shades on light solutions which direct the light to the task. The Institute of Lighting Professionals (ILP 2011) defines obtrusive light as being any of the following three forms: 1) sky glow is the brightening of the night sky; 2) glare is the uncomfortable brightness of a light source when viewed against a dark background; and 3) light trespass is the spilling of light beyond the boundary of the property or area being lit.

Light sources that are more than 600 m from any potential receptor (*e.g.*, dwelling, roadway, or public recreation area) are assumed not to create a significant source of obtrusive light or adverse environmental interactions, as defined by an internationally-accepted guideline (CIE 2003). Therefore, through careful Project planning (Section 3.2), the short-term duration of the Project (approximately two to three months), and through the incorporation of efficient lighting design and standard lighting mitigation, adverse environmental interactions due to lighting are predicted to be low and largely limited to areas directly adjacent to or very close to the Project.

Although the necessary obstruction lighting for human safety as required by Transport Canada will be implemented, consideration of less intense light selection and planned mitigation (*e.g.*, downward lighting, shades) that meet Transport Canada's standards (*e.g.*, Standard 621 – Obstruction Marking and Lighting (Transport Canada 2011)) will be considered during final Site design, to potentially reduce bird mortalities as a result of Project lighting.

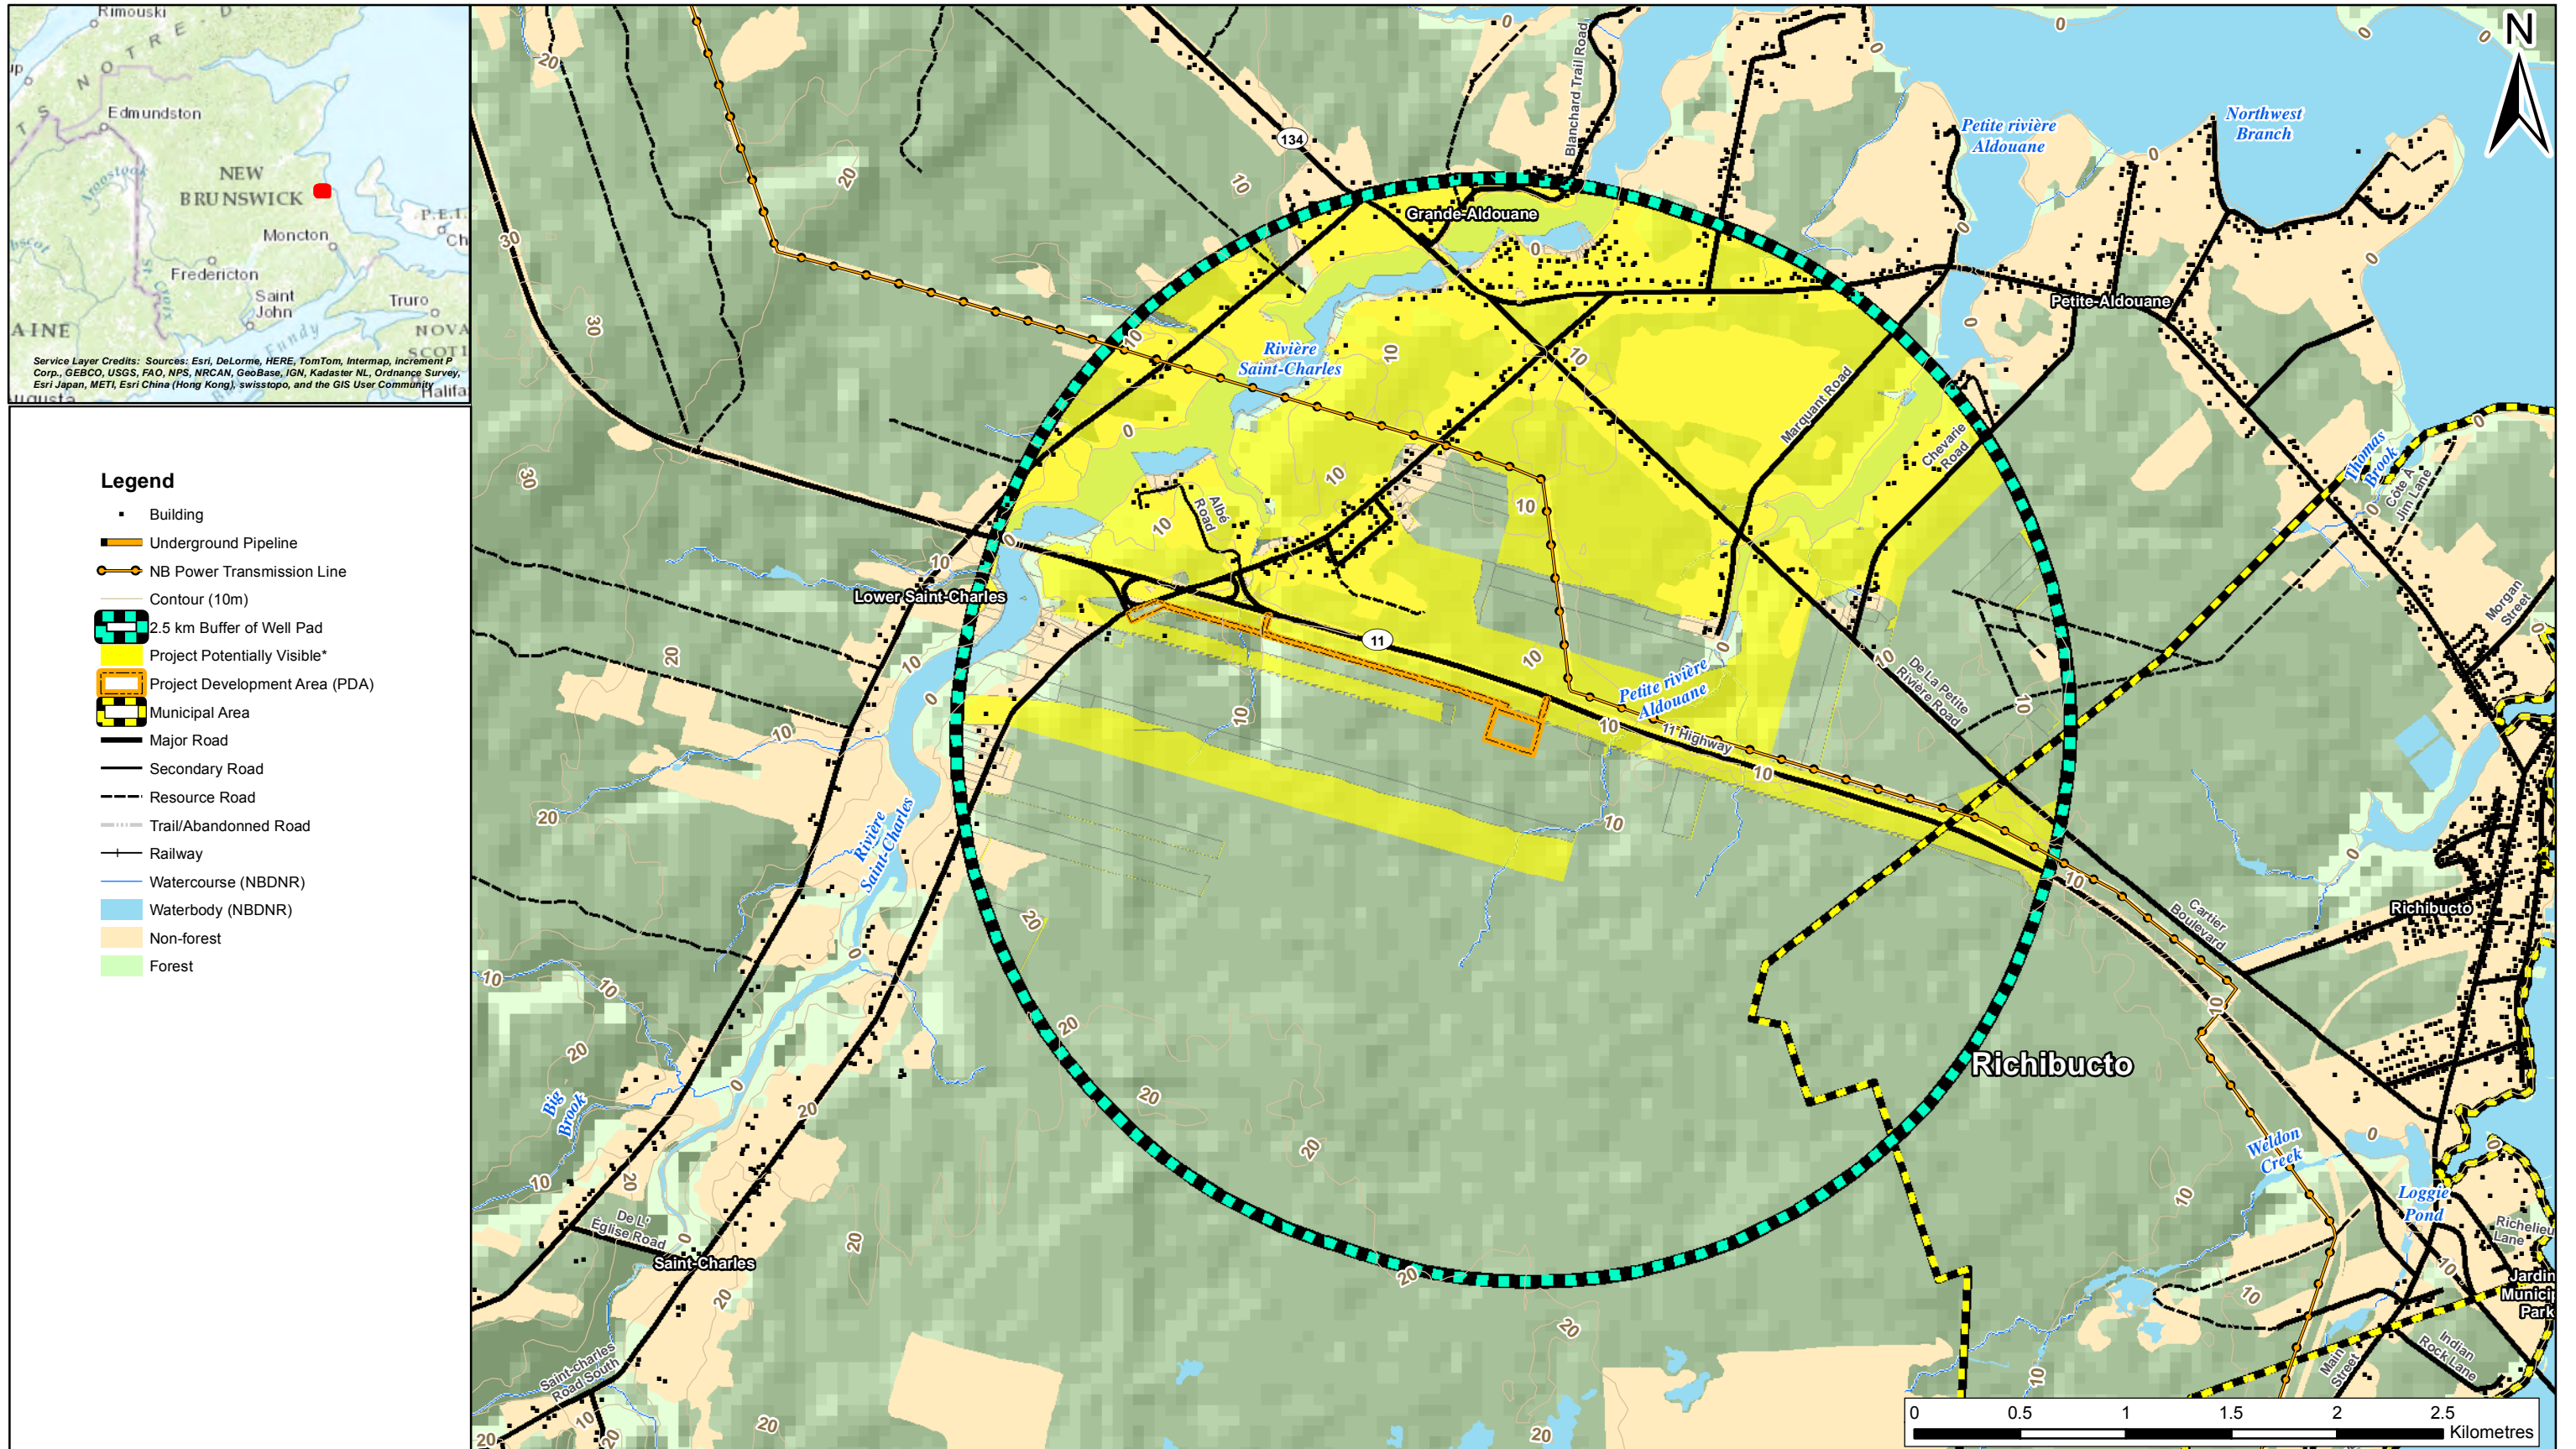

Projection: New Brunswick Double Stereographic
 Scale: 1:30,000
 Date: 06 Apr 2014
 Fig. By: JAB
 Appd. By: MM

Client: **SWN** Resources Canada

Project: 121810275

**Viewshed for Visibility of Drill Rig When on Site – Lower Saint-Charles
 (Assuming 9 m Forest Cover Height)**

Fig. No.: 3.3

NBDNR: Forest Inventory Database Layers (2009)
 SNB: Provincial Layers (2005), Municipalities Layer (Oct 2011),
 NBDELG: Regulated Wetland Layer (March 2011)

Lower Saint-Charles

Overall, given that only the upper portion of the derrick of the drilling rig will require limited lighting, that the highest component of the Project (the drilling rig) may be only slightly visible above the existing forest cover to some residential, recreational, agricultural areas within 2.5 km of the Project (with other Project components not likely visible as they are well below the existing forest cover and/or topography surrounding the Project location), the short duration of the Project (approximately two months), and the planned mitigation, substantive interactions between the Project and the Visual Environment on an extended basis are not expected.

3.4.9 Heritage Resources

Heritage Resources are defined as any physical remnants found on top of and/or below the surface of the ground, that provide evidence and information about past human use of, and interaction with, the physical environment. These resources may be from the earliest times of human occupation to more recent times. Heritage Resources are relatively permanent features of the environment; however, the integrity of these resources is highly susceptible to construction and ground disturbing activities. Built heritage resources are also considered susceptible to changes, such as the addition of new structures in the immediate vicinity of such resources, or modification to the existing resources. Heritage Resources are an important consideration in recognition of the interest of potentially affected First Nations, the general public as a whole, and provincial and federal regulatory agencies who assure the effective management of these resources.

For clarity, in this Section, Heritage Resources encompasses archaeological, paleontological, and built heritage resources. The New Brunswick *Heritage Conservation Act* defines a "paleontological object" as "*a work of nature consisting of or containing any remains, trace or imprint of a multicellular plant or animal or a stromatolite preserved in the Earth's crust since some past geologic time, but does not include human remains.*" These resources are contained in bedrock and may be found at or below the surface.

3.4.9.1 Existing Conditions

The existing conditions for Heritage Resources are based on information provided by Archaeological Services. At the time of preparing the present document, a site visit had not yet taken place. However, a site visit will be completed to confirm the findings of this Phased EIA Submission and the results will be provided to the appropriate regulatory agencies before initiating Construction.

Based on Archaeological Predictive Model information received from Archaeological Services in 2014, the proposed PDA has limited potential for heritage resources. There are no known cemeteries, portage routes, archaeological sites, heritage buildings, or any other documented heritage feature within the immediate vicinity of the PDA. There is a documented suspected plane wreck (Sabre 23278) approximately 5 km to the east of the PDA. Two documented plane crash sites are located approximately 6 km to the west of the PDA. The closest recorded archaeological site in the vicinity of the PDA, CeDf-24, is located over 4 km away from the PDA. There are a number of archaeological sites located in the vicinity of CeDf-24; however, none are closer to the PDA than CeDf-24. There is a cemetery 2.6 km to the north and a cemetery 4 km to the southwest of the PDA. No other heritage-related features are documented in the area.

In general, the PDA is thought to be located within the traditional territory of the Mi'kmaq First Nations peoples, who would have used the larger area of the PDA for thousands of years before the arrival of European colonists. Both Wolastoqiyik and Mi'kmaq First Nation peoples would have used travel routes in the area to facilitate trade and communication between their respective territories. One such route that was used to travel between the east coast and the St. John River was a portage between the Richibucto and Salmon Rivers (Ganong 1899), although that is distant, at approximately 27 km from the PDA. The general area likely provided several sources of subsistence for First Nations populations through the coastline and its many marshes, lakes, rivers, and wetlands that provided fish, waterfowl, and other food sources. Evidence from archaeological sites that have been identified along the New Brunswick coast line and on the major rivers outside and to the north of the PDA indicates continuous use of and habitation by First Nations populations for thousands of years before the present, including settlements at the mouths of major rivers such as Buctouche and Richibucto (NBDNR 2007). Based on information provided to date, there is no known evidence of any of these activities having taken place within the PDA or in proximity to the PDA.

The earliest European colonists arrived in this part of New Brunswick in the mid to late 1600s, settling along the coast and shoreline of such rivers as the Miramichi, the Richibucto, and the Kouchibouguac. Farming, logging, and fishing were the major economic activities, in addition to shipbuilding following European colonization and settlement.

According to the provincial "Guidelines for Conducting Professional Archaeological Assessments in New Brunswick" (Archaeological Services 2012), all areas within 80 m of a watercourse (and within 100 m for watercourse confluences) have an elevated potential for archaeological resources. An unnamed tributary to Rivière Saint-Charles along the access road Option 3 is indicated on Archaeological Services Potential Mapping to have an archaeological buffer associated with it. That portion of the PDA therefore has potential for archaeological resources and is recommended for further archaeological assessment (*i.e.*, a field survey). This finding will be evaluated by a permitted archaeologist before any ground-breaking Construction activities is initiated within the PDA.

No built heritage resources are located within the PDA. Since bedrock is not anticipated to be encountered during the development of the well pad, these Construction activities are not anticipated to affect paleontological (fossil) resources.

3.4.9.2 Project Interactions with Heritage Resources

If the decision is made to use Option 3 for the access road, which would include the crossing of a watercourse, the PDA has an overall elevated potential for heritage resources, as described in Section 3.4.9.2. Therefore, a permitted archaeologist would make application for an Archaeological Field Research Permit and conduct an archaeological impact assessment including a field survey of the PDA prior to Construction to confirm the potential presence of heritage resources. Moreover, as discussed in Section 3.4.5.2, it is anticipated that SWN RC's engagement and delegated consultation with First Nations may involve First Nation evaluation and monitoring of the Site. It is possible that the field survey may result in a recommendation for further archaeological assessment. If the site visit results in a determination of low archaeological potential and no additional mitigation is warranted, these results and recommendations from the field assessment will be presented to Archaeological Services for confirmation. Any recommendation to conduct additional work (*e.g.*, archaeological shovel testing) will be reviewed by Archaeological Services and implemented before Construction. The results of

additional mitigation measures will be documented and presented to Archaeological Services for evaluation and approval.

At this time, the potential for the presence of paleontological, or built heritage resources in the PDA is considered to be low, given the information available to date. Likewise, the potential for the presence of archaeological resources in the well pad portion of the PDA is considered to be low, based on the information available to date. The potential for archaeological resources along access road Option 3 (if selected) will be assessed by a permitted archaeologist prior to Construction within the elevated archaeological potential zone where this road crosses the unnamed tributary to Rivière Saint Charles.

In the event that potential heritage resources are encountered during Construction, work will be suspended, the potential resources will be examined by a permitted archaeologist, and a mitigation strategy will be developed in consultation with Archaeological Services as warranted. This mitigation could include additional shovel testing, excavation, or adjusting the PDA location.

Based on the characteristics of the area, potential engagement of First Nation support, the completion of an archaeological impact assessment including a field survey, and the implementation of any warranted mitigation, it is considered unlikely that there will be any substantive adverse environmental interactions to Heritage Resources as a result of the Project.

3.4.10 Transportation Network

The Transportation Network includes the system of available public routes pertaining to road transportation in a particular area.

3.4.10.1 Existing Conditions

Transportation route options were explored to reduce interactions with adjacent residences and environmental features. The PDA is accessed via Route 11 and Saint-Charles Road South (as needed, and only if access road Option 3, is selected). The distance between Route 11 and the PDA is approximately 120 m.

Route 11 is two-lane paved highway, designated by the NBDTI as a Provincial Arterial Highway, which generally allows for posted speed limits of 90 km/h. Traffic control personnel and signage will be used when Project vehicles merge onto Route 11, due the high speeds of traffic along this road.

Traffic volumes and types along the preferred access routes (*i.e.*, Route 11 and Saint-Charles Road South near the interchange with Route 11, if access road Option 3 is selected) are generally consistent with other highways and roads in central New Brunswick. Given that forests are actively harvested in the general vicinity of the Project, logging trucks are at times present. Transport traffic is generally concentrated along Route 11.

3.4.10.2 Project Interactions with the Transportation Network

Project-related transportation is described in Section 2.2.5.2. All Project-related traffic will abide by applicable weight, size, and speed limits, and additional mitigation will be used for Project vehicles merging onto Route 11 and Saint-Charles Road South (if access road Option 3 is selected). In the event that an oversized load or vehicle is required, a permit will be obtained from NBDTI, who, in issuing such a

permit, determines under what conditions the oversized load or vehicle will not adversely affect the New Brunswick road transportation network.

Daily truck traffic to the Site will be variable, depending on the activities being carried out; however, based on the estimated number of truck loads (Table 2.2) and length of time (approximately two to three months) required for the Project, it is estimated that the increased truck traffic will range from 9–26 trucks per day (total of 210–614 trucks over an two to three month period, see Section 2.2.5.2), depending on the needs of the Project at a particular time (e.g., amount of water and gravel required). Route 11 is a provincial arterial highway and is designated to handle high traffic volumes with vehicle weights up to 62,500 kg gross vehicle weight. Most Project employees will travel to the Site in personal vehicles along the preferred access routes. As such, it is expected that Project-related traffic will result in a small (but indistinguishable) increase to traffic volumes along the preferred access routes. This traffic increase is expected to be small (i.e., approximately 9–26 trucks and 8–15 employee vehicles per day), of relatively short duration (approximately two to three months), and by virtue of Route 11's designation as a provincial arterial highway, is not expected to result in an unacceptable Level of Service.

No features along the preferred access routes create a unique traffic pattern (e.g., an industrial facility with a large volume of truck and employee traffic) that would substantially differentiate it from surrounding roads and highways.

No aspects of the Project would be expected to increase accident rates. Because there will be incrementally more traffic along the preferred access routes to the Project, there may be incrementally more traffic accidents on an absolute basis; however, accident rates are not expected to change as a result of the Project.

Accordingly, substantive interactions between the Project and Transportation are not anticipated.

4.0 FIRST NATIONS ENGAGEMENT

SWN RC is responsible for its First Nation engagement strategy in partial reliance on direction from and cooperation with the Crown. A summary of SWN RC's First Nation engagement strategy is provided below.

The Constitution of Canada imposes a duty on the Crown to consult with Aboriginal groups when it has knowledge of the potential existence of an Aboriginal right and contemplates conduct that might adversely affect it. Although the Crown is responsible for consultation, project proponents, like SWN RC, are normally delegated procedural aspects of consultation (e.g., notifying First Nations, seeking input on adverse effects, proposing accommodation measures). With respect to this Project, the Crown's duty to consult arises as a means to reconcile the Crown's objective of responsible resource development with First Nations' exercise of Aboriginal rights.

Since receiving its Licences to Search in March 2010, SWN RC has continuously engaged and consulted with the First Nations in New Brunswick with respect to all its exploration activities. On certain previous exploration work (two-dimensional seismic programs), the Crown formally delegated procedural aspects of consultation to SWN RC via written determinations and these delegations were followed by SWN RC. It is expected that further procedural delegation will occur and SWN RC shall use best efforts to complete the consultation required therein and make any additional efforts as circumstances warrant.

As described in Section 3.4.5, SWN RC will be engaging and/or consulting First Nations on matters concerning historical use and/or current use of the Site by First Nations in exercising Aboriginal rights and intends to implement programs for investigating and mitigating any interactions therewith. SWN RC intends this programming to include in part the leading or support of archaeological visits and programs.

Beyond this focused engagement, SWN RC intends to:

- provide information to the Chiefs and Councils of the First Nation communities identified to have the strongest potential to be affected by the use of the Site. It is intended that this will include information on the Project as well as the programs SWN RC implements with respect to First Nation consultation, request meeting times, solicit any questions or concerns that their community may have;
- provide more general information packages to all other First Nation communities in the Province;
- following submission of this document, the First Nation communities identified to have the strongest potential to be affected by the use of the Site will be sent a copy by mail. SWN RC will work with First Nations to provide support to assist First Nations in fully understanding the information provided regarding the Project;
- offer to host First Nation-specific information sessions;

- share information and collaborate directly with First Nations Chiefs and Councils, any individuals or associations appointed or delegated by Chiefs and Councils to carry out engagement and consultation on the Project; and
- develop and implement additional consultation work as may be mutually agreed to by SWN RC and First Nations or delegated by the Province to SWN RC.

SWN RC intends to also establish communication processes to:

- respond to comments, concerns and questions raised by First Nations in respect of the Project; and
- share with First Nations information and results on the focussed consultation programs implemented with respect to avoiding and mitigating any interaction between the Project and historical use and/or current use of the Site by First Nations in exercising Aboriginal rights.

It is intended that all First Nation individuals who request information will be provided a detailed information package, via Canada Post, containing the following elements:

- a letter from SWN RC;
- a fact sheet providing key information about the Project;
- information on where the Phased EIA Submission document can be viewed;
- a description of the provincial EIA review and approval process;
- a description of the proposed location of the Project including a map;
- a statement indicating citizens are invited to ask questions with regard to the Project, potential environmental effects, and key mitigation;
- SWN RC contact information;
- specific information on the consultation with First Nations being completed with respect to the Project; and
- the deadline date by which all comments should be received.

SWN RC will deliver copies of the information shared with First Nations, including the questions, comments, and concerns it receives from First Nations, to the Province of New Brunswick as required by the Province to satisfy its duty to consult and accommodate First Nations. SWN RC will use reasonable efforts to implement any programming, procedures, or modifications required by the Province of New Brunswick with respect to First Nations and participate in the Province's consultation processes as required.

5.0 PUBLIC ENGAGEMENT

SWN RC has been directly engaging the general public in relation to its exploration activities and the Project. The following is a summary of SWN RC's Public and Stakeholder engagement program in relation to the Project.

The overarching goals of any public engagement program conducted as part of an EIA are to confirm that those potentially affected by a project are aware of the project and its potential environmental effects, are able to obtain additional information about the project, and are able to express concerns they may have about a project or its potential environmental effects. A public engagement program is also an important tool for the identification, scoping, and resolution or mitigation of potential issues of concern.

SWN RC has been involved in an extensive public engagement program since being awarded its Licences to Search in March 2010. SWN RC will expand on this program and continue to seek public input throughout the review process for this Phased EIA Submission. SWN RC considers public input and participation to be a key component of ensuring a successful project.

In addition to the broader public and stakeholder engagement program undertaken since 2010, SWN RC will seek to engage the public and stakeholders further with respect to this specific Phased EIA Submission that include written communication to elected officials, written communication to affected landowners, making the Phased EIA Submission document available for public viewing, and preparing and submitting a summary report to NBDELG within 60 days of submitting this document to NBDELG for review. These requirements are specified in NBDELG's "A Guide to Environmental Impact Assessment in New Brunswick."

5.1 WRITTEN COMMUNICATION TO ELECTED OFFICIALS

SWN RC will send letters and an information package to elected officials within 3 km of the PDA; this will include the Dominic LeBlanc (MP), Tilley O'Neil Gordon (MP), Bertrand LeBlanc (MLA), Brian Gallant (MLA), Mayor Roger Doiron, Mayor David Hanson, and Paul Lang (Executive Director for Regional Service Commission 6). The purpose of this communication will be to inform officials that a Phased EIA Submission has been submitted to NBDELG and explain the Project in detail.

5.2 WRITTEN COMMUNICATION TO POTENTIALLY AFFECTED LANDOWNERS

Information packages will be delivered via Canada Post to all landowners within 1.8 km of the Project, and elsewhere upon landowner request. The information package will contain the following information:

- a letter from SWN RC;
- a fact sheet providing key information about the Project;
- information on where the Phased EIA Submission document can be viewed;

- a description of the provincial EIA review and approval process;
- a description of the proposed location of the Project including a map;
- a statement inviting citizens to ask questions with regard to the Project, potential environmental effects, and key mitigation;
- SWN RC contact information; and
- the deadline date by which all comments should be received.

5.3 INFORMATION PACKAGES TO GROUPS AND ORGANIZATIONS

SWN RC will provide written communication to local community, environment, and business groups upon request. The following organizations will be contacted for their input since members may live within a few kilometres of the PDA: Kent Centre Chamber of Commerce, Richibucto Downtown Committee, Richibucto Business Improvement Committee, and Richibucto Lions Club.

5.4 PHASED EIA SUBMISSION DOCUMENT AVAILABLE FOR PUBLIC VIEWING

As part of the engagement process, SWN RC will make the Phased EIA Submission document available for public viewing at the Richibucto Public Library and a second location local to the Project area (to be determined), NBDELG Regional Office in Fredericton and on the SWN RC website, www.swnnb.ca. Public Notices will also appear in local daily and community papers such as the Moncton Times & Transcript and L'Étoile Kent to inform the public that a Phased EIA Submission document has been submitted. The ads will follow the following format:

**Phased EIA Submission
Environmental Impact Assessment Regulation
Clean Environment Act
Opportunity for Public Comment**

- date of submission;
- purpose of the Project;
- Project location;
- address for NBDELG Regional Office;
- SWN RC contact information where comments may be submitted (mail and email addresses);
- date by which comments must be received
- visit www.swnnb.ca for additional information; and
- notice placed by SWN RC.

5.5 ADDITIONAL ENGAGEMENT

SWN RC will develop a website module for the Phased EIA Submission Document and will send information packages to interested parties as appropriate.

5.5.1 Bilingual Website Module

A bilingual module for the Phased EIA Submission document will be posted on SWN RC's website (www.swnb.ca) (Photo 3). The web page will allow for ease of access to an electronic copy of the Phased EIA Submission document in a dedicated location that will be visible from the homepage of the website. The module will also provide information about SWN RC and the Project, frequently asked questions (FAQs), and a form to submit questions or comments.

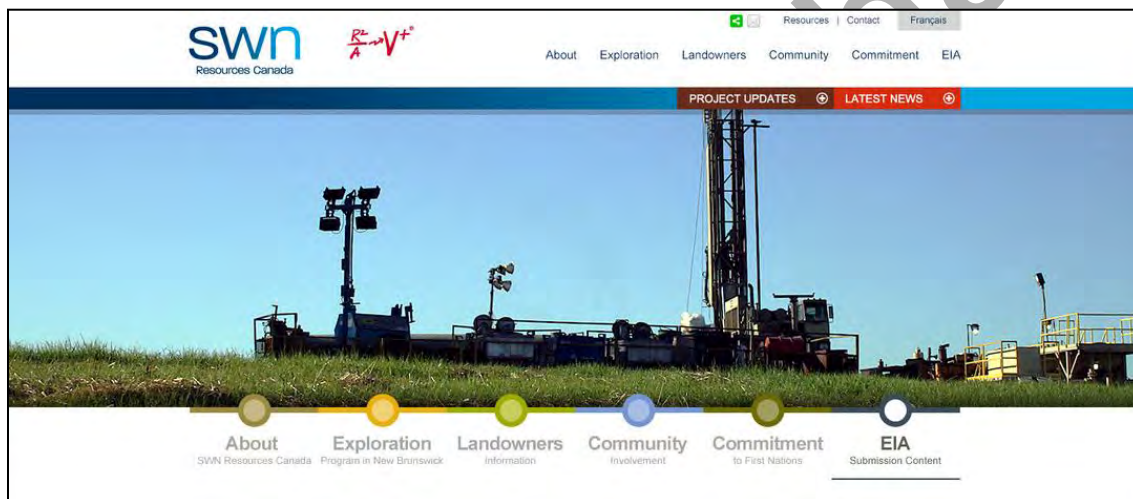


Photo 3: Homepage of website identifying placement of EIA Submission.

5.6 PHASED EIA SUBMISSION INQUIRIES

During the public engagement period, SWN RC will document and track all comments and inquiries received on the Project and the Phased EIA Submission. Within 60 days of submitting this document, SWN RC will produce a report that will summarize the public engagement activities conducted and comments received as part of the public engagement process. The summary report will be provided to NBDELG to document the engagement process and will also be made available for public review on the SWN RC website. The report will include:

- a description of all public engagement activities conducted specifically with respect to the Project, with associated dates and times;
- a copy of the landowner information package;
- copies of correspondence SWN RC receives as a result of engagement activities (with names and addresses of individuals withheld, for privacy reasons);

- key issues or concerns that were raised during the engagement process, and how SWN RC proposes to address the relevant concerns and technical issues as part of the Project; and
- any additional engagement activities that SWN RC has planned.

Lower Saint-Charles

6.0 CONCLUSION

This Phased EIA Submission document is being submitted to NBDELG as part of the Phased EIA Process for the construction of an access road, and well pad, and the drilling of a single stratigraphic well near Lower Saint-Charles, New Brunswick (the Project). This assessment considers the potential interactions of the Project, as described in Section 2.0, with the surrounding environment. The VECs that may interact with the Project are identified as Atmospheric Environment; Aquatic Environment; Water Resources; Terrestrial Environment; Historical and Current Use by First Nations; Socio-economic Environment; Land Use; Visual Environment; Heritage Resources; and Transportation Network.

In consideration of operational siting and environmental planning considerations (Section 3.2); the implementation of planned, proven and effective mitigation (Section 3.4) as part of the Project to reduce potential environmental interactions; and the inclusive continued First Nation, public and stakeholder engagement opportunities (Sections 4.0 and 5.0, respectively), there are no substantive environmental interactions anticipated as a result of the Project.

7.0 CLOSURE

This report has been prepared by Stantec Consulting Ltd. (Stantec) for the sole benefit of SWN Resources Canada, Inc. (SWN RC). The report may not be relied upon by any other person or entity, other than for its intended purposes, without the express written consent of Stantec and SWN RC.

This report was undertaken exclusively for the purpose outlined herein and was limited to the scope and purpose specifically expressed in this report. This report cannot be used or applied under any circumstances to another location or situation or for any other purpose without further evaluation of the data and related limitations. Any use of this report by a third party, or any reliance on decisions made based upon it, are the responsibility of such third parties. Stantec accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions taken based on this report.

Stantec makes no representation or warranty with respect to this report, other than the work was undertaken by trained professional and technical staff in accordance with generally accepted engineering and scientific practices current at the time the work was performed. Any information or facts provided by others and referred to or used in the preparation of this report were assumed by Stantec to be accurate. Conclusions presented in this report should not be construed as legal advice.

The information provided in this report was compiled from existing documents and data provided by SWN RC and by applying currently accepted industry standard mitigation and prevention principles. This report represents the best professional judgment of Stantec personnel available at the time of its preparation. Stantec reserves the right to modify the contents of this report, in whole or in part, to reflect the any new information that becomes available. If any conditions become apparent that differ significantly from our understanding of conditions as presented in this report, we request that we be notified immediately to reassess the conclusions provided herein.

8.0 REFERENCES

- AER (Alberta Energy Regulator). 2007. Directive 038 – Noise Control. Calgary, Alberta.
- API (American Petroleum Institute). 2010. Recommended Practice 10D2: Recommended Practice for Centralizer Placement and Stop Collar Testing.
- API (American Petroleum Institute). 2013. Recommended Practice 10B2: Recommended Practice for Testing Well Cements. Second Edition.
- Avery, M., P.F. Springer, and J.F. Cassel. 1976. The effects of a tall tower in nocturnal bird migration—a portable ceilometer study. *The Auk*, 93: 281-291.
- CAIT (Climate Analysis Indicators Tool). 2012. Climate Analysis Indicators Tool, Version 9.0. (Washington, DC: World Resources Institute, 2012. Available online at: <http://cait.wri.org/cait.php> (last accessed January 24, 2014).
- CIE (Commission Internationale De L'Eclairage). 2003. Guide on the Limitation of the Effects of Obtrusive Light from Outdoor Lighting Installations CIE 150:2003 ISBN 978 3 901906 19 0 Report was drafted by A. Fisher and N. Pollard.
- Dietrich, J., P. Hannigan and K. Hu. 2009. Petroleum Resource Potential of the Carboniferous Maritimes Basin, Eastern Canada. *Frontiers + Innovation – 2009 CSPG CSEG CWLS Convention*.
- Eaton, S. R. 2010. Frederick Brook Shale Spurs Canadian Exploration *In AAPG Explore*, August 2010 edition. Available online at: <http://www.aapg.org/explorer/2010/08aug/08explorer10.pdf> (last accessed on February 23, 2014).
- Environment Canada. 2010. Facility GHG Reporting: Data Search. Available online at: http://www.ec.gc.ca/pdb/ghg/onlineData/dataSearch_e.cfm (last accessed March 4, 2014).
- Environment Canada. 2011. Municipal Water Use, 2009 Statistics. Ottawa.
- Environment Canada. 2012. National Pollutant Release Inventory Online Data Search. Available online at: http://www.ec.gc.ca/pdb/websol/querysite/query_e.cfm (last accessed on January 27, 2014).
- ERCB (Energy Resources Conservation Board). 2006. Directive 036: a Function Test and a Pressure Test.
- Evans Ogden 1996. Evans Ogden, L. 1996. Collision Course: The Hazards of Lighted Structures and Windows to Migratory Birds. Fatal Light Awareness Program (FLAP) and World Wildlife Fund Canada (WWF). 52 pp.
- Evans Ogden, L. 1996. Collision Course: The Hazards of Lighted Structures and Windows to Migratory Birds. Fatal Light Awareness Program (FLAP) and World Wildlife Fund Canada (WWF). 52 pp.

- FHWA (Federal Highway Administration). 2006. US Department of Transportation FHWA Roadway Construction Noise Model User's Guide. Final Report, January 2006. Report no. FHWA-HEP-05-054. Prepared by the US DOT, Research and Innovative Technology Administration.
- GNB (Government of New Brunswick). 2013. Responsible Environmental Management of Oil and Natural Gas Activities in New Brunswick: Rules for Industry. Available online at: http://www2.gnb.ca/content/gnb/en/corporate/promo/natural_gas_from_shale.html (last accessed on February 27, 2014)
- GNB (Government of New Brunswick). 2014. New Brunswick Hydrographic Network; data are maintained by New Brunswick Department of Natural Resources and made available online at: <http://www.snb.ca/geonb1/e/DC/NBHN.asp> (last accessed on March 10, 2014)
- Health Canada. 2009. Draft Health Canada Guidance on Noise Assessment for CEEA Projects.
- Health Canada. 2010. Useful Information for Environmental Assessments. Available online at: http://www.hc-sc.gc.ca/ewh-semt/alt_formats/hecs-sesc/pdf/pubs/eval/envIRON_assess-eval/envIRON_assess-eval-eng.pdf (last accessed on January 30, 2014).
- Institute of Lighting Professionals (ILP) 2011. Guidance Notes for the Reduction of Obtrusive Light GN01:2011. Available online at: <https://www.theilp.org.uk/documents/obtrusive-light/> (last accessed October 24, 2013).
- IPCC (Intergovernmental Panel on Climate Change). 2007. Solomon, S., D. Qin, M. Manning, Z. Chen, M. Marquis, K.B. Averyt, M. Tignor and H.L. Miller (eds.). Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change, 2007. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA.
- Jacques Whitford Environment Limited. 2003. New Brunswick Water Availability Assessment Study. Prepared for Agriculture and Agri-Food Canada, dated March 31, 2003.
- MGI 2002. Assessment Studies of Water and Wastewater Systems and Associated Water Management Practices at Big Cove First Nation, Big Cove, NB (Site #06004) Atlantic Region. Prepared for Indian and Northern Affairs Canada, Atlantic Region, dated March 2002.
- Nature Trust of New Brunswick. 2012. Ecologically Significant Areas. Available online at: <http://www.naturetrust.nb.ca/wp/?p=233> (Last accessed on March 20, 2014)
- NBDELG (New Brunswick Department of Environment and Local Government). 2012a. Oil & Natural Gas in NB. Available online at: http://www2.gnb.ca/content/gnb/en/corporate/promo/natural_gas_from_shale/fact_sheets/oil_natural_gas_innb.html (last accessed on December 20, 2013).
- NBDELG (New Brunswick Department of Environment and Local Government). 2012b. New Brunswick Air Quality Monitoring Results 2010. Environmental Reporting Series. Environmental Evaluation and Reporting Branch, State of the Environment Branch.

- NBDELG (New Brunswick Department of Environment and Local Government). 2013. New Brunswick Online Well Log System, (last accessed on October 30, 2013).
- NBDNR (New Brunswick Department of Natural Resources). 2007. Our Landscape Heritage: The Story of Ecological Land Classification. Prepared by New Brunswick Department of Natural Resources, The Ecosystem Classification Working Group. Vincent F. Zelazny, General Editor. 2nd Edition. Originally issued 2003. ISBN 978-1-55396-203-8 in New Brunswick.
- NBDNRE (New Brunswick Department of Natural Resources and Energy). 2000. Bedrock Geology of New Brunswick. Minerals and Energy Division. Map NR-1 (2000 Edition). Scale 1:500 000
- NBDNRE (New Brunswick Department of Natural Resources and Energy). 2002. Generalized Surficial Geology map of New Brunswick. Minerals and Energy Division.
- NBDTI (New Brunswick Department of Transportation and Infrastructure). 2012. 2012 Spring Weight Restrictions. Available online at: <http://www.gnb.ca/0113/Policy/2012-Spring-Weight-Restrictions-e.pdf> (last accessed September 29, 2013).
- NBENV (New Brunswick Department of Environment). 1995. Watercourse and Wetland Alterations Technical Guidelines. Regional Services Branch.
- NBENV (New Brunswick Department of Environment). 2011. Oil, Shale Gas and Natural Gas exploration in New Brunswick: Environmental Review and Approval Processes Available online at: <http://www.gnb.ca/0009/0377/0003/OSGNG-e.pdf> (last accessed on January 17, 2014).
- NBENV (New Brunswick Department of Environment). 2012. A Guide to Environmental Impact Assessment in New Brunswick. Available online at: A Guide to Environmental Impact Assessment in New Brunswick (last accessed May 10, 2012).
- Rampton, V.N. 2002. Generalized surficial geology map of New Brunswick Department of Natural Resources and Energy. Minerals, Policy and Planning Division. NR-8 (scale 1: 500,000) Reproduced with permission of the Minister of Public Works and Government Services Canada, 2002 and Courtesy of Natural Resources Canada. Geological Survey of Canada.
- Rich, C. and T, Longcore. 2006. Ecological Consequences of Artificial Night Lighting. Island Press. 458 pp.
- St. Peter, C. 2000. Oil shales and oil and natural gas in New Brunswick: Historical and current industry related activities. New Brunswick Department of Natural Resources and Energy, Minerals and Energy Division, Information Circular 2000-5, 14 p.
- Statistics Canada. 2007. Richibucto, New Brunswick (Code1308016) (table). 2006 Community Profiles. 2006 Census. Statistics Canada Catalogue no. 92-591-XWE. Ottawa. Released March 13, 2007. <http://www12.statcan.ca/census-recensement/2006/dp-pd/prof/92-591/index.cfm?Lang=E> (accessed March 31, 2014).

- Statistics Canada. 2012. Richibucto, New Brunswick (Code 1308016) and Fredericton, New Brunswick (Code 1310032) (table). Census Profile. 2011 Census. Statistics Canada Catalogue no. 98-316-XWE. Ottawa. Released October 24, 2012. <http://www12.statcan.gc.ca/census-recensement/2011/dp-pd/prof/index.cfm?Lang=E> (accessed March 31, 2014).
- Transport Canada. 2011. Transport Canada General Operating and Flight Rules Part VI of the Canadian Aviation Regulations. Amended December 31, 2011; last content revision June 1, 2012. Last accessed online October 24, 2013, at: <http://www.tc.gc.ca/eng/civilaviation/regserv/cars/part6-menu-2441.htm>.
- Transport Canada. 2012. Urban Transportation Emissions Calculator. Available online at: <http://wwwapps.tc.gc.ca/Prog/2/UTEC-CETU/> (accessed on April 4, 2014).
- Turcotte-Lanteigne, A. and E. Ferguson. 2008. Ecosystem Overview of the Richibucto Watershed in New Brunswick. Canadian Manuscript Report on Fisheries and Aquatic Sciences 2847: xiv + 167 p.
- US EPA (United States Environmental Protection Agency). 1995. AP 42, Fifth Edition, Compilation of Air Pollutant Emission Factors, Volume 1: Stationary Point and Area Sources, Chapter 13.2.3, Heavy Construction Operations, Office of Air Quality Planning and Standards, United States Environmental Protection Agency. Available online at: <http://www.epa.gov/ttn/chief/ap42/ch13/final/c13s02-3.pdf> (last accessed April 4, 2014).
- US EPA (United States Environmental Protection Agency). 1996. AP 42, Fifth Edition, Compilation of Air Pollutant Emission Factors, Volume 1: Stationary Point and Area Sources, Chapter 3.4, Large Stationary Diesel and All Stationary Dual-fuel Engines, Office of Air Quality Planning and Standards, United States Environmental Protection Agency. Available online at: <http://www.epa.gov/ttn/chief/ap42/ch03/final/c03s04.pdf> (last accessed April 4, 2014).
- US EPA (United States Environmental Protection Agency). 2005. Nonroad2005 Emission Inventory Model, 2005. Available online at: <http://www.epa.gov/oms/nonrdmdl.htm> (last accessed April 4, 2014).
- US EPA (United States Environmental Protection Agency). 2006. AP 42, Fifth Edition, Compilation of Air Pollutant Emission Factors, Volume 1: Stationary Point and Area Sources, Chapter 13.2.2, Unpaved Roads, Office of Air Quality Planning and Standards, United States Environmental Protection Agency. Available online at: <http://www.epa.gov/ttn/chief/ap42/ch03/final/c03s04.pdf> (last accessed April 4, 2014).
- US EPA (United States Environmental Protection Agency). 2010. Exhaust and Crankcase Emission Factors for Nonroad Engine Modeling – Compression-Ignition: NR-009d. Assessment and Standards Division, Office of Transportation and Air Quality. EPA-420-R-10-018.
- Wiese, F.K., W.A. Montevicchi, G.K. Davoren, F. Huettmann, A.W. Diamond, and J. Linke. 2001. Seabirds at risk around offshore oil platforms in the north-west Atlantic. Mar. Poll. Bull. Draft April 23, 2001.

Appendix A

Additional Information Requirements

Lower Saint-Charles

Lower Saint-Charles

General Information Requirements

The following is intended to fulfill the additional information required for the Phased EIA Submission, as outlined in the New Brunswick EIA Guide, entitled "A Guide to Environmental Impact Assessment in New Brunswick, November 2012" (NBDELG 2012) and in the "Responsible Environmental Management of Oil and Natural Gas Activities in New Brunswick: Rules for Industry" (GNB 2013).

1.0 THE PROPONENT

- i) Name of Proponent SWN Resources Canada, Inc.
- ii) Address of Proponent P.O. Box 35
Moncton, NB E1C 8R9
- iii) Chief Executive Officer (or designate) Chad Peters, Manager, New Brunswick Exploration
- iv) Principal Contact Person for the purposes of Environmental Impact Assessment Chad Peters, Manager, New Brunswick Exploration
P.O. Box 35
Moncton, NB E1C 8R9
Toll Free 1-877-SWN-NB23 (1-877-796-6223)
(506) 382-9497
Email: Chad_Peters@SWN.COM
- v) Property Ownership The Project Site is situated on two Crown land properties near Lower Saint-Charles, Kent County, New Brunswick. The Parcel Identifiers (PIDs) are 25245531 and 00000003. The Crown Licence for PID 25245531 currently held under the Fundy Crown Timber Licence, which is being managed by Irving Pulp and Paper, Limited. PID 00000003 is managed by NBDTI.

2.0 THE PROJECT

- i) Name of the Undertaking Development of the Lower Saint-Charles Hydrocarbon Well: Well Pad and access road Construction and Vertical Stratigraphic Drilling.
- ii) Project Overview The Project will consist of the construction of a 3.5 hectare (ha) well pad to house the well, and three access roads options (of which two will be selected) approximately 120 m, 1,300, and 2,000 m in length connecting the well pad to existing road infrastructure; and the drilling of a single vertical stratigraphic well to an approximate depth of 1,000-4,000 m for stratigraphic examination. This construction and drilling will allow for an examination of the vertical stratigraphy that will aid in assessing the potential for hydrocarbon resources.

The specific activities that will be conducted as part of the Project are described in Section 2 of the Phased EIA Submission document.

As discussed in detail in Section 2.2.3.1 of the Phased EIA Submission document, activities beyond construction of the well pad, drilling of the stratigraphic well and examination of the vertical stratigraphy (e.g., decommissioning or production) will be assessed separately as necessary following the Phased EIA Process and the Rules for Industry (GNB 2013).

- iii) Purpose / Rationale / Need for Undertaking
See Section 1.2 of the Phased EIA Submission document.
- iv) Project Location
The PDA is situated on Crown land approximately 2.4 km south of the rural area of Grande-Aldouane, 2.4 km east of the rural area of Lower Saint-Charles, and 1.5 km west of the Town of Richibucto municipal boundary, Kent County, New Brunswick. The parcel identifier for the well pad portion of the PDA, as referred to by Service New Brunswick, is PID No. 25245531, and the access road options begin on this PID and are primarily located on PID 00000003, which is under NBDTI management. The approximate centre of the PDA area for the well pad is at coordinates 46°41'21.867"N and 64°55'31.174"W.
For more information, see Section 2.1 of the Phased EIA Submission document.
- v) Siting Considerations
A description of the considerations that were taken into account in choosing the Project location is provided in Section 2.1.1 and operational siting and environmental planning considerations are provided in Section 3.2 of the Phased EIA Submission document.
- vi) Physical Components and Dimensions of the Project
A description of Project components is provided in Section 2.2 of the Phased EIA Submission document.
- vii) Construction Details
An overview of Project construction activities is provided in Section 2.2.1 of the Phased EIA Submission document.
- viii) Operation and Maintenance Details
An overview of Project operation activities is provided in Sections 2.2.2 and 2.2.3 of the Phased EIA Submission document.

- | | | |
|-----|--|---|
| ix) | Future Modifications, Extensions, or Abandonment | An overview of decommissioning activities is provided in Section 2.2.4 of the Phased EIA Submission document. |
| x) | Project-Related Documents | An Environmental Protection Plan and an Emergency Response Plan will be submitted to NBDELG under separate cover. |

3.0 DESCRIPTION OF THE EXISTING ENVIRONMENT

The descriptions of all relevant features that are found within the Project location and surrounding areas that could be potentially affected by the Project are provided in Chapter 3 of the Phased EIA Submission document.

4.0 SUMMARY OF ENVIRONMENTAL IMPACTS

Potential environmental effects, or "impacts", of the various Project phases are provided in Section 3.4 of the Phased EIA Submission document.

5.0 SUMMARY OF PROPOSED MITIGATION

Mitigation which will be implemented during Construction and Drilling is described in Section 2.2 Project Components and Activities and discussed in relation to potential Project-related environmental interactions in Section 3.4 of the Phased EIA Submission document.

A detailed presentation of mitigation measures to be implemented as part of the Project is provided in the Environmental Protection Plan, submitted under separate cover.

6.0 PUBLIC INVOLVEMENT

A brief summary of the planned public involvement activities planned as part of the Project is provided in Chapters 4 and 5 of the Phased EIA Submission document.

7.0 APPROVAL OF THE UNDERTAKING

Permits, licences, approvals, or other authorizations that may be required for the Project are discussed in Section 3.3 of the Phased EIA Submission document.

A federal environmental assessment under the *Canadian Environmental Assessment Act* is not required as it is not a designated project.

8.0 FUNDING

Funding for the Project is being provided entirely by SWN RC, and no provincial or federal funding is anticipated.

9.0 SIGNATURE



April 11, 2014

Chad Peters, Manager, New Brunswick Exploration

Date:

Lower Saint-Charles